

# GPY111 (PEF7071VV16) PHOTOGRAPH TOP NEW Designs (NAME)

Hardware Description

**MaxLinear Confidential** 

Revision 1.5, 2021-05-05 Reference ID 618152



# Legal Notice

The content of this document is furnished for informational use only, is subject to change without notice, and should not be construed as a commitment by MaxLinear, Inc. MaxLinear, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in the informational content contained in this guide. Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced into, stored in, or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of MaxLinear, Inc.

MaxLinear, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless MaxLinear, Inc. receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of MaxLinear, Inc. is adequately protected under the circumstances.

MaxLinear, Inc. may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from MaxLinear, Inc., the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

MaxLinear, the MaxLinear logo, any MaxLinear trademarks (MxL, Full-Spectrum Capture, FSC, G.now, AirPHY, Puma, and AnyWAN), and the MaxLinear logo on the products sold are all property of MaxLinear, Inc. or one of MaxLinear's subsidiaries in the U.S.A. and other countries. All rights reserved.

the prope.

Who is the prope.

Who is the prope.

Who is the prope. \*Other company trademarks and product names appearing herein are the property of their respective owners.

© 2021 MaxLinear, Inc. All rights reserved.

MaxLinear, Inc. 5966 La Place Court, Suite 100 Carlsbad, CA 92008

Tel.: +1 (760) 692-0711 Fax: +1 (760) 444-8598 www.maxlinear.com



### **Revision History**

Previous:	Revision 1.5, 2021-05-05 Revision 1.4, 2018-08-29
Page	Major changes since previous revision
All	This document was rebranded from Intel to MaxLinear, including the logo and Legal Notice page. All product names were rebranded by removing Intel® from the names.
181	Chapter 7.2 Chip Identification and Ordering Information updated, including MMID added to Table 74.
	page. All product names were rebranded by removing Intel® from the names.  Chapter 7.2 Chip Identification and Ordering Information updated, including MMID added to Table 74.



# **Table of Contents**

	Table of Contents	4
	List of Figures	8
	List of Tables	. 10
1	Introduction	. 12
1.1	About Ethernet Network Connection GPY111	. 12
1.2	Overview	. 13
1.2.1	Logic Symbol	. 13
1.2.2	Features	
1.2.3	Typical Applications	
1.2.3.1	Copper Application	
1.2.3.2	Media Converter Application	
1.2.3.3	Gigabit Interface Converter (GBIC) Application	
1.2.4	Terminology and Nomenclature	. 16
2	External Signals  Pin Diagram  Pin Description	. 17
2.1	Pin Diagram	. 17
2.2	Pin Description	. 18
2.2.1	Pin identifications	. 18
2.2.2	General Pins	. 19
2.2.3	Media-Dependent Interface (MDI) Pins	. 20
2.2.4	Media-Independent Interface (MII) Pins	. 21
2.2.5	Control Interface Pins	. 26
2.2.6	JTAG Interface	. 27
2.2.7	Power Supply Pins	28
2.2.1	. э сарру на	. 20
3	Functional Description	. 29
	Functional Description  Modes of Operation	. 29
<b>3</b> 3.1 3.1.1	Functional Description  Modes of Operation  Copper Flow	. 29 . 29 . 30
<b>3</b> 3.1 3.1.1 3.1.2	Power Supply Pins  Functional Description  Modes of Operation  Copper Flow  Media Converter Flow	. 29 . 29 . 30 . 30
3 3.1 3.1.1 3.1.2 3.2	Functional Description  Modes of Operation  Copper Flow  Media Converter Flow  Media-Independent Interfaces (MII)	29 29 30 30
3.1 3.1.1 3.1.2 3.2 3.2.1	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)	. 30 . 30 . 30
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing	. 30 . 30 . 30
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning	30 30 30 30 31
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)	30 30 30 30 31
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)	30 30 30 30 31
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)	. 30 . 30 . 30 . 31 . 32 . 32
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions	30 30 30 31 32 32 35
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)	30 30 30 31 32 32 35 36
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1 3.3.1.1	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface	30 30 30 31 32 32 35 36 36
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1 3.3.1.1	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface  Fiber Interface	30 30 30 31 32 32 35 36 36 36
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1.1 3.3.1.1 3.3.1.2	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface  Fiber Interface  Auto-Negotiation	30 30 30 31 32 32 35 36 36 36
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1 3.3.1.1 3.3.1.2 3.3.2 3.3.3	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface  Fiber Interface  Auto-Negotiation  Auto-Downspeed	30 30 30 31 32 32 35 36 36 36 37
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1 3.3.1.1 3.3.1.2 3.3.3 3.3.4	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface  Fiber Interface  Auto-Negotiation  Auto-Downspeed  Auto-Crossover and Polarity-Reversal Correction	30 30 30 31 32 32 35 36 36 37 37 37
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1.1 3.3.1.1 3.3.1.2 3.3.2 3.3.3 3.3.4	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface  Fiber Interface  Auto-Negotiation  Auto-Downspeed  Auto-Crossover and Polarity-Reversal Correction  Configuration, Control and Status Functions	30 30 30 31 32 32 35 36 36 36 37 37 37
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1.1 3.3.1.1 3.3.1.2 3.3.2 3.3.3 3.3.4 3.4	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface  Fiber Interface  Auto-Negotiation  Auto-Downspeed  Auto-Crossover and Polarity-Reversal Correction  Configuration, Control and Status Functions  Configuration of GPY111 via Pin-Strapping	30 30 30 31 32 32 35 36 36 36 37 37 38 38 39
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.3 3.2.4 3.3 3.3.1 3.3.1.1 3.3.1.2 3.3.2 3.3.3 3.3.4 3.4.1 3.4.1	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface  Fiber Interface  Auto-Negotiation  Auto-Downspeed  Auto-Crossover and Polarity-Reversal Correction  Configuration, Control and Status Functions  Configuration of GPY111 via Pin-Strapping  Configuration of GPY111 via External EEPROM	30 30 30 31 32 32 32 35 36 36 36 37 37 38 38 38 39
3 3.1 3.1.1 3.1.2 3.2 3.2.1 3.2.1.1 3.2.1.2 3.2.2 3.2.3 3.2.4 3.3 3.3.1.1 3.3.1.1 3.3.1.2 3.3.2 3.3.3 3.3.4 3.4	Media-Independent Interfaces (MII)  X-speed Media-Independent Interface (xMII)  xMII Signal Multiplexing  xMII Signal Conditioning  Reduced Media-Independent Interface (RMII)  Reduced Gigabit Media-Independent Interface (RGMII)  Serial Gigabit Media-Independent Interface (SGMII)  Media Functions  Media-Dependent Interfaces (MDI)  Copper Interface  Fiber Interface  Auto-Negotiation  Auto-Downspeed  Auto-Crossover and Polarity-Reversal Correction  Configuration, Control and Status Functions  Configuration of GPY111 via Pin-Strapping	30 30 30 31 32 32 35 36 36 36 37 37 38 38 38 39 41





3.4.2.4	EEPROM Frame Formats	48
3.4.2.4.1	Frame Formats in 11-Bit Addressing Mode	48
3.4.2.4.2	Frame Formats in 16-Bit Addressing Mode	. 50
3.4.2.4.3	EEPROM Access via MDIO	. 52
3.4.3	Configuration and Control Via MDIO	. 55
3.4.3.1	MDIO Interface	. 55
3.4.3.2	MDIO Address Space	. 56
3.4.3.3	MDIO Interrupt	. 58
3.4.4	LED Interface	. 59
3.4.4.1	Single Color LED Mode	. 59
3.4.4.2	Bi-Color LED Mode	60
3.4.4.3	LED Operations	. 61
3.4.4.3.1	LED Externally Controlled Mode (ECM)	. 61
3.4.4.3.2	LED Functions in Internally Controlled Mode (ICM)	. 61
3.4.4.3.3	LED Configuration in ICM	. 62
3.5	Power Management	64
3.5.1	Power Supply	. 64
3.5.1.1	Power Supply Using Integrated Switching Regulator	. 64
3.5.1.2	Power Supply Without Using Integrated Switching Regulator	. 65
3.5.2	Power Over Ethernet (PoE)	. 66
3.5.2.1	Powered Device (PD)	. 66
3.5.2.2	Power Sourcing Equipment (PSE)	66
3.5.3	Energy-Efficient Ethernet	. 67
3.5.3.1	Energy-Efficient Ethernet	. 67
3.5.3.2	FFF for 100BASF-TX	67
3.5.3.3	EEE for 1000BASE-T  Auto-Negotiation for EEE Modes	. 68
3.5.3.4	Auto-Negotiation for EEE Modes	. 68
3.5.4	Wake-on-LAN (WoL)	. 68
3.5.5	Wake-on-LAN (WoL) Power Down Modes	. 71
3.5.5.1	PD_FORCE Mode	. 72
3.5.5.2	ANEG Mode	. 73
3.5.5.3	PD_IDLE Mode	. 73
3.5.5.4	DATA Mode	. 73
3.5.5.5	EEE Mode	. 73
3.6	Testing Functions	
3.6.1	JTAG Interface	. 74
3.6.2	Payload Data Tests	. 75
3.6.2.1	Test Packet Generator (TPG)	. 75
3.6.2.2	Error Counters	. 76
3.6.3	Test Loops	
3.6.3.1	Near-End Test Loops	
3.6.3.1.1	MAC Interface Test Loop	
3.6.3.1.2	MDI Test Loop	
3.6.3.1.3	Echo Test Loop	. 77
3.6.3.2	Far-End Test Loop	. 78
1	MDIO Registers	79
	STD: Standard Management Registers	
	PHY: PHY-Specific Management Registers	
	MMD Registers	
5.1	EEE: Standard EEE Registers for MMD=0x03	133





ANEG: Standard Auto-Negotiation Registers for MMD=0x07	140
, , ,	
· · ·	
AX	
Twisted-Pair Interface O	157
SGMII Interface . Q	157
1000BASE-X Interface	157
AC Characteristics	158
Reset	158
Power Supply	159
Input Clock	159
Output Clock	160
MDIO Interface	160
RMII Interface	161
RGMII Interface	163
Transmit Timing Characteristics	163
Receive Timing Characteristics	164
SGMII Interface	166
Transmit Timing Characteristics	166
Receive Timing Characteristics	167
1000BASE-X Interface	168
Transmit Timing Characteristics	168
Receive Timing Characteristics	169
Twisted-Pair Interface	169
Power Consumption	170
Isolation Requirements	170
External Circuitry	171
Crystal	171
LED	172
Transformer (Magnetics)	173
RJ45 Plug	174
Twisted-Pair Common-Mode Rejection and Termination Circuitry	175
SGMII Interface	176
1000BASE-X Interface	178
JTAG Interface Timing	179
Package	180
•	
Thermal Resistance	
	EEPROM: EEPROM Address Space (MMD=0x1E) INTERNAL: Internal Address Space (MMD=0x1F) Electrical Characteristics Absolute Maximum Ratings Operating Range Recommended Operating Conditions Power-Up Sequence DC Characteristics Digital Interfaces GPIO Interfaces Mil Receive Interface LED Interface LED Interface LED Interface LED Interface JTAG Inferface SGMII Interface SGMII Interface SGMII Interface SGMII Interface SGMII Interface Reset Power Supply Input Clock Output Clock MDIO Interface RMII Interface RMII Interface Transmit Timing Characteristics Receive Timing Characteristics SGMII Interface Transmit Timing Characteristics Receive Timing Characteristics Receive Timing Characteristics Receive Timing Characteristics Tvisted-Pair Interface Transmit Timing Characteristics Twisted-Pair Interface Toystal LED Transformer (Magnetics) RJ45 Plug Twisted-Pair Common-Mode Rejection and Termination Circuitry SGMII Interface JTAG Interface Intering Package Package Package Outline Chip Identification and Ordering Information





References	 		 	 		 				 				 			 			 	٠.	1	83
Terminology	 		 		 	 			 	 				 						 		1	84

data sheer are Norte (or products) mentioned in this signs (NAND)



# **List of Figures**

# **List of Figures**

Figure 1	Logic Symbol of the GPY111	13
Figure 2	GPY111 Used in Copper Applications	15
Figure 3	GPY111 Used in Media Converter Applications	15
Figure 4	GPY111 Used in 10/100/1000BASE-T GBIC Application	16
Figure 5	Transmit and Receive Terminology	16
Figure 6	Pin Diagram of the GPY111 (Top View of PG-VQFN-48 Package)	17
Figure 7	Functional High-Level Block Diagram of GPY111	29
Figure 8	xMII Signal Conditioning between MAC and GPY111	
Figure 9	Twisted-Pair Interface of GPY111 Including Transformer and RJ45 Plug	
Figure 10	Overview of the Configuration Flow	
Figure 11	Soft Pin-Strapping External Circuitry	
Figure 12	Timing Diagram for a Random Address Single Byte Write	
Figure 13	Timing Diagram for a Random Address Single Byte Read	
Figure 14	Timing Diagram for a Burst Read	
Figure 15	Timing Diagram for a Random Address Single Byte Write	
Figure 16	Timing Diagram for a Random Address Single Byte Read	
Figure 17	Timing Diagram for a Burst Read	
Figure 18	Flow-Chart for an Indirect EEPROM Write Cycle Via MDIO-MMD Access	
Figure 19	Flow-Chart for an Indirect EEPROM Read Cycle Via MDIO-MMD Access	
Figure 20	MDIO Write Frame	
Figure 21	MDIO Bood Framo	55
Figure 22	Layout of the MDIO Address Space  External Circuitry for an Active-High MDINT	57
Figure 23	External Circuitry for an Active-High MDINT	58
Figure 24	External Circuitry for an Active-Low MDINTO	59
Figure 25	Single Color LED External Circuitry	60
Figure 26	Bi-Color LED External Circuitry	61
Figure 27	External Circuitry using the Integrated Switching Regulator	
Figure 28	External Circuitry without using the Integrated Switching Regulator	
Figure 29	EEE Low-Power Idle Sequence	
Figure 30	Block Diagram of a WoL Application	69
Figure 31	The Magic Packet Format	70
Figure 32	State Diagram for Power-Down Mode Management	72
Figure 33	Test Packet Format	75
Figure 34	MAC Interface Near-End Test Loop	
Figure 35	MDI connector Near-End Test Loop	77
Figure 36	Echo Near-End Test Loop	
Figure 37	PCS Far-End Test Loop	
Figure 38	Timing Diagram for the GPY111 Reset Sequence	
Figure 39	Timing Diagram for the MDIO Interface	
Figure 40	Transmit/Receive Timing Diagram of the RMII	
Figure 41	Transmit Timing Diagram of the RGMII	
Figure 42	Receive Timing Diagram of the RGMII	
Figure 43	Transmit Timing Diagram of the SGMII	
Figure 44	Receive Timing Diagram of the SGMII	
Figure 45	Transmit Timing Diagram of the 1000BASE-X Interface	
Figure 46	Receive Timing Diagram of the 1000BASE-X	
Figure 47	Equivalent Circuit for Crystal Specification	
Figure 48	Tolerance Graph for the Forward Current Versus Voltage of the Supported LEDs	
Figure 49	Schematic of a Typical Gigabit Ethernet Transformer Device	

# Ethernet Network Connection GPY111



### **List of Figures**

Figure 50	Twisted-Pair Common-Mode Rejection and Termination Circuitry	175
Figure 51	External Circuitry for SGMII	176
Figure 52	Simplified External Circuitry for SGMII	177
Figure 53	External Circuitry for a 1000BASE-X Interface	178
Figure 54	JTAG Timing Definition	179
Figure 55	Package Outline Drawing of the PG-VQFN-48 Package	180
Figure 56	Chip Marking of GPY111	181



**List of Tables** 

# **List of Tables**

Table 1	Abbreviations for Pin Types	18
Table 2	Abbreviations for Buffer Types	18
Table 3	General Pins	19
Table 4	Twisted-Pair Interface Pins	20
Table 5	Media-Independent Interface Pins	21
Table 6	Control Interface Pins	26
Table 7	JTAG Interface Pins	27
Table 8	Power Supply Pins	28
Table 9	MII and MDI Combinations Supported by GPY111	29
Table 10	xMII Signal Multiplexing	
Table 11	Operation of Various Interfaces for Different FLOW and MODE Settings	31
Table 12	Transmit Control Encoding	33
Table 13	Receive Control Encoding	33
Table 14	Supported Twisted-Pair Mappings	
Table 15	Soft Pin-Strapping: Mapping of Pull-Down Capacitance/Resistor Values to Configuration Bits	42
Table 16	Mapping of Configuration Pins/Bits to Device Parameters (No EEPROM Connected)	42
Table 17	Functions of Device Parameters Controlled by Soft Pin-Strapping (No EEPROM Connected)	43
Table 18	Mapping of Configuration Pins/Bits to Device Parameters (EEPROM is Connected)	44
Table 19	Functions of Device Parameters controlled by Soft Pin-Strapping (EEPROM is Connected)	
Table 20	Supported EEPROM Devices	
Table 21	Configuration Signature Record (CSR)	
Table 22	Configuration Content Record	
Table 23	Address Bit Mapping in 11-Bit Addressing Mode	
Table 24	Address Bit Mapping in 16-Bit Addressing Mode	51
Table 25	Definition of MDIO Frame Components	56
Table 26	MDIO Indirect MMD Device Address Overview	58
Table 27	Direct LED Functions	62
Table 28	Complex LED Functions	62
Table 29	Switching Regulator External Component Values	65
Table 30	Programming Sequence for the Wake-On-LAN Functionality	70
Table 31	JTAG TAP Controller Op-Codes  JTAG Boundary Scan ID	74
Table 32	JTAG Boundary Scan ID	74
Table 33	Registers Address Space	
Table 34	Registers Overview	
Table 35		81
Table 36	Registers Address Space	
Table 37	Registers Overview	
Table 38	Register Access Types	
Table 39	Similar Registers	
Table 40	Similar Registers	
Table 41	Similar Registers	
Table 42	Similar Registers	
Table 43	Absolute Limit Ratings	
Table 44	Operating Range	
Table 45	DC Characteristics of the GPIO Interfaces (VDDP = 2.5 V)	
Table 46	DC Characteristics of the GPIO Interfaces (VDDP = 3.3 V)	
Table 47	DC Characteristics of the Receive MII Interface	
Table 48	DC Characteristics of the Transmit MII Interface	
Table 49	DC Characteristics of the Transmit LED Interface	. 156





### **List of Tables**

Table 50	DC Characteristics of the JTAG Interface (VDDH = 2.5 V)	157
Table 51	DC Characteristics of the JTAG Interface (VDDH = 3.3 V)	157
Table 52	AC Characteristics of the RSTN Pin	
Table 53	AC Characteristics of the Power Supply	159
Table 54	AC Characteristics of Input Clock on XTAL1 Pin	
Table 55	AC Characteristics of Output Clock on CLKOUT Pin	160
Table 56	AC Characteristics of the MDIO Interface	161
Table 57	Timing Characteristics of the RMII at 10/100 Mbit/s	162
Table 58	Transmit Timing Characteristics of the RGMII	163
Table 59	Receive Timing Characteristics of the RGMII	164
Table 60	ransmit Timing Characteristics of the SGMII	166
Table 61	Receive Timing Characteristics of the SGMII	
Table 62	Transmit Timing Characteristics of the 1000BASE-X Interface	168
Table 63	Receive Timing Characteristics of the 1000BASE-X	
Table 64	Power Consumption with VDDH and VDDP Set to 2.5 V, VDDC and VDDL Set to 1.0 V $$ .	170
Table 65	Electrical Characteristics for Supported Crystals	
Table 66	Electrical Characteristics for Supported LEDs	
Table 67	Electrical Characteristics for Supported Transformers (Magnetics)	
Table 68	Electrical Characteristics for Supported RJ45 Plugs	
Table 69	Electrical Characteristics for supported Transformers (Magnetics)	
Table 70	Electrical Characteristics for the SGMII External Components	
Table 71	Electrical Characteristics for the 1000BASE-X External Components	
Table 72	JTAG Interface Timing	179
Table 73	Chip Marking Pattern	181
Table 74	Chip Ordering Information	181
Table 75	Thermal Resistance of the PG-VQFN-48 Package	182
	1 V V	
	Chip Ordering Information Thermal Resistance of the PG-VQFN-48 Package	



# 1 Introduction

This document specifies the functionality of Ethernet Network Connection GPY111 Gigabit Ethernet (GbE) transceiver integrated circuit. It describes all aspects required for the development of systems based on Ethernet PHY technology.

### 1.1 About Ethernet Network Connection GPY111

The GPY111 is an ultra-low power, multi-mode Gigabit Ethernet (GbE) PHY IC, supporting speeds of 10, 100 and 1000 Mbit/s in full-duplex or half-duplex mode. It can be used in various data flows based on twisted-pair and fiber-optic communication links. The main application is the copper mode, where Media-Independent Interface (MII) data is converted to a Media-Dependent Interface (MDI) based on the 10BASE-T(e), 100BASE-TX and 1000BASE-T Ethernet standards according to [1].

The GPY111 supports a number of features for convenience and reliability, including auto-negotiation (Chapter 3.3.2), auto-MDIX, auto-downspeed (Chapter 3.3.3) and cable wiring fault correction. In addition, the integrated cable diagnostics mode, the test packet generator, and the various test loops can be used for analysis and debugging of the target system. The GPY111 includes an integrated serializer/deserializer (SerDes) that can be used to operate a fiber link in conjunction with a 1000BASE-X fiber module. This capability enables mediaconverter data flow applications.

The MII pins of the GPY111 can be re-assigned to form one of several standard MII interfaces such as RMII, RGMII and SGMII. In RGMII mode, the integrated delay function for the TX and RX clock simplifies PCB design. In SGMII mode, the PHY does not require a receive clock and instead uses the integrated Clock and Data Recovery (CDR).

Configuration management of the GPY111 can be done using its MDIO interface. Alternatively, the device can be pre-configured by means of an external I<sup>2</sup>C-based EEPROM. Basic settings can be made using the novel soft pin-strapping feature available for the LED pins (see **Chapter 3.4.1**). The device also integrates a standard Test Access Port (TAP) for boundary scan.

The GPY111 is encased in the industry's smallest package (PG-VQFN-48) for a GbE PHY device with a given feature set and considering the level of integration. It therefore provides an ideal solution for footprint-sensitive applications such as SFP copper modules or LAN-on-Motherboard. Furthermore, the GPY111 design supports a reduced external bill of materials, for example through the integration of termination resistances at both the MDI and MII. The CLKOUT pin can optionally be used to provide a 25 MHz reference clock, allowing for multiple PHY devices to be cascaded while using only one crystal.

With an effectiveness of more than 80%, the GPY111 is tailored for energy efficiency. It can be operated from a single power supply ranging from 2.5 V to 3.3 V, in which case the 1.0 V domains are self-supplied using the device's integrated DC/DC switching regulator. By supporting the Energy-Efficient Ethernet (EEE) standard as defined in the IEEE 802.3az standard ([2]), the PHY is able to reduce active power consumption during periods of low link utilization, to a small fraction of the nominal consumption. Through implementation of a voltage mode line-driver, the active nominal power of the device is significantly reduced when compared to other devices of the same kind. Additionally, this line-driver technology does not require any center tap supply at the magnetics. This further simplifies the magnetics as there is now no need to use common-mode chokes.

The GPY111 supports further power savings at system level by means of the integrated Wake-on-LAN (WoL) feature. This mode can be activated at all Ethernet speeds. A WoL event is indicated to the SoC via an interrupt pin. It is possible to configure the polarity and functionality of this interrupt. Various events may be indicated via this interrupt, so as to reduce the need for MDIO polling by the SoC.

The GPY111 provides a set of 3 freely-configurable LED pins. Although LEDs can also be directly driven by the SoC (for example a network processor) via MDIO registers, the built-in functionality covers application needs such as bi-color LED support, configurable blinking frequencies, and configurable multiple-function assignment per LED.



# 1.2 Overview

This section gives an overview of the features and capabilities of the GPY111 (PEF7071VV16).

# 1.2.1 Logic Symbol

Figure 1 shows the logic symbol of the Ethernet Network Connection GPY111.

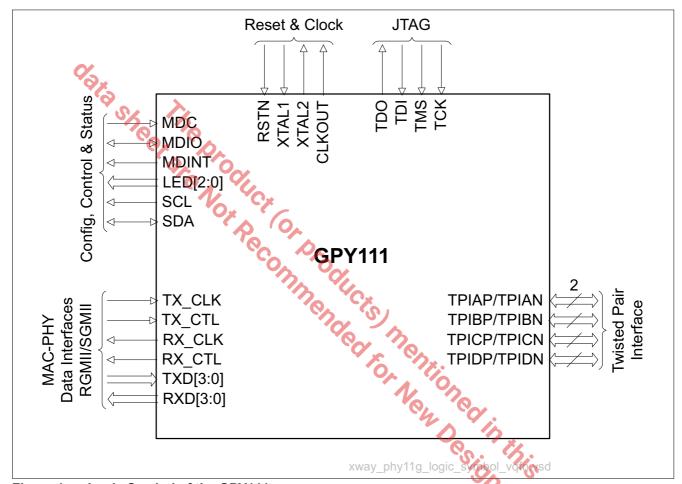


Figure 1 Logic Symbol of the GPY111



### 1.2.2 **Features**

This section outlines the features of the GPY111 (PEF7071VV16).

### General:

- Flexible power supply: V<sub>DDH</sub> = 2.5 V... 3.3 V
- Single power supply optionally using the integrated DC/DC converter
- Low power consumption of 400 mW in Gigabit Ethernet mode
- Configurable startup mode using sophisticated pin-strappings
- Flexible architecture using an integrated device controller

# Interfaces:

- Twisted-pair interface:
  - 10BASE-T(e), 100BASE-TX, 1000BASE-T<sup>1)</sup>
- Data interfaces (xMII1):
  - RMII
  - RGMII
  - SGMII /1000BASE-X SerDes at 1.25 Gbaud
  - Jumbo packets of up to 10 kB
- Control interfaces:
  - MDIO
  - JTAG interface for boundary scan
  - Support of stand-alone operational mode using EEPROM interface (I<sup>2</sup>C) Thentioned in this NAND,
- Clocking:
  - Support of 25 MHz and 125 MHz input clock
  - Support of 25 MHz crystal using integrated oscillator
  - 25 MHz clock output

### **Ethernet:**

- Auto-negotiation with next-page support
- Wake-on-LAN support
- Auto-downspeed
- Support of auto-MDIX at all copper media speeds
- Support of auto polarity-correction at all copper media speeds
- Various test features:
  - Test loops
  - Dummy frame generation and frame error counters
  - Analog self-test
- Cable diagnostics:
  - Cable open/short detection
  - Cable length estimation

### **External circuitry optimization:**

- Integrated termination resistors at twisted-pair interface
- Integrated termination resistors at RGMII
- Support of low-cost transformers (magnetics)
- Support of low-cost crystal

<sup>1) 10</sup>BASE-T operation is only standard-conform at  $V_{\text{DDH}}$  = 3.3 V. This limitation does not apply to 10BASE-Te Ethernet.



# 1.2.3 Typical Applications

This section introduces typical applications of the GPY111, sorted according to the medium type used in the application.

# 1.2.3.1 Copper Application

In applications using the copper medium, the GPY111 is used to connect a 10/100/1000BASE-T capable MAC unit to a twisted-pair medium, such as a CAT5 cable infrastructure. The connection between MAC and PHY can be established using one of the supported xMII interface types: RGMII or SGMII.

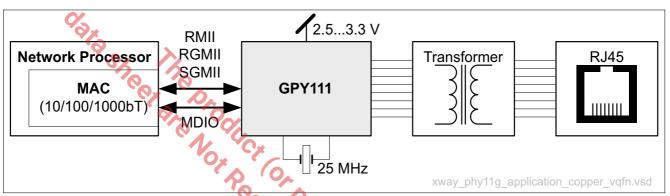


Figure 2 GPY111 Used in Copper Applications

# 1.2.3.2 Media Converter Application

In media converter applications, the PHY is used to interface between fiber and copper media. The fiber medium can be connected using a fiber or SFP module, which is connected via a 1000BASE-X interface. The copper medium is connected via a twisted-pair interface (RJ45), using a transformer for galvanic de-coupling. Only one instance of the GPY111 device is required to address this application. Stand-alone operation is possible using the EEPROM (see **Chapter 3.4.2**) self-configuration capability.

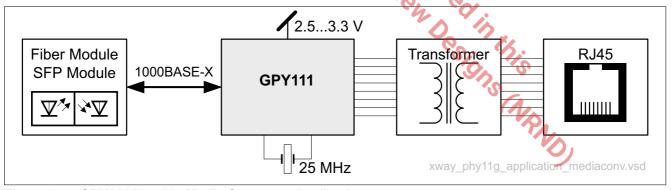


Figure 3 GPY111 Used in Media Converter Applications

# 1.2.3.3 Gigabit Interface Converter (GBIC) Application

The GBIC [12] application is used to support a 10/100/1000BASE-T GBIC module implementation, as illustrated in **Figure 4**. The MDIO interface of the GPY111 device is now not available, but an EEPROM can optionally be used to upload customer-specific configuration settings (see **Chapter 3.4.2**).



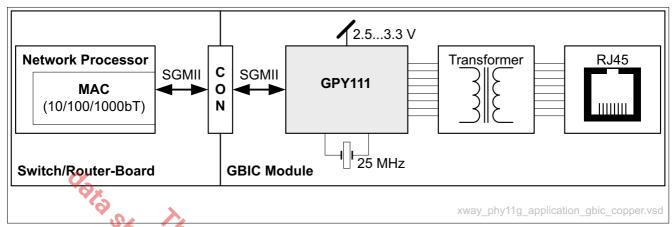


Figure 4 GPY111 Used in 10/100/1000BASE-T GBIC Application

# 1.2.4 Terminology and Nomenclature

Throughout this document, the terms transmit (TX) and receive (RX) are used to specify the data and signal flow directions. Unless stated otherwise, the TX direction refers to the flow of data and signals from the MII to the MDI, that is from the MAC interface to the transmission medium. The transmission of data actually refers to the transport of data towards the next lower layer in the OSI reference model. The RX direction refers to the flow of data and signals in the opposite directions.

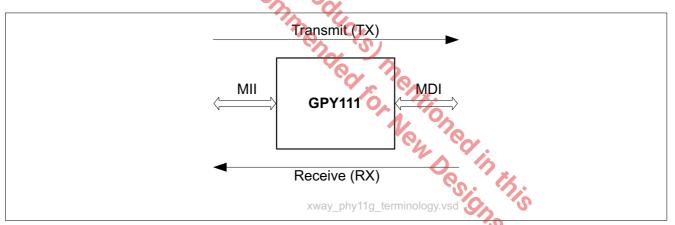


Figure 5 Transmit and Receive Terminology

Abbreviations are used throughout this document. Each abbreviation is explained once at its first appearance in the text, and is also included in a consolidated list of acronyms in **Terminology**.

When referring to registers, the document uses the following nomenclature:

[Address-Space].[Sub-Space].[Register].[Register-Element]

As an example,

MDIO.STD.CTRL.PD

refers to the PD bit inside the CTRL register, which is located inside the STD register's space of the MDIO address space (see also **Chapter 4**).

Alternatively, the text uses register references according to IEEE 802.3 [1]. These references are only applicable to the MDIO.\* address space. Such references use the format:

(Register-Number.Register-Bit-Number)

As an example, the reference (0.11) refers to the same MDIO.STD.CTRL.PD bit.



# 2 External Signals

This chapter describes the external signals of the Ethernet Network Connection GPY111.

# 2.1 Pin Diagram

**Figure 6** shows the pin diagram of the GPY111 when taking a top view of the PG-VQFN-48 package. The pins and the common ground pad (EPAD) are visible on the bottom side of the package. The latter is illustrated using dashed lines. The subsequent sections describe each of these pins in more detail.

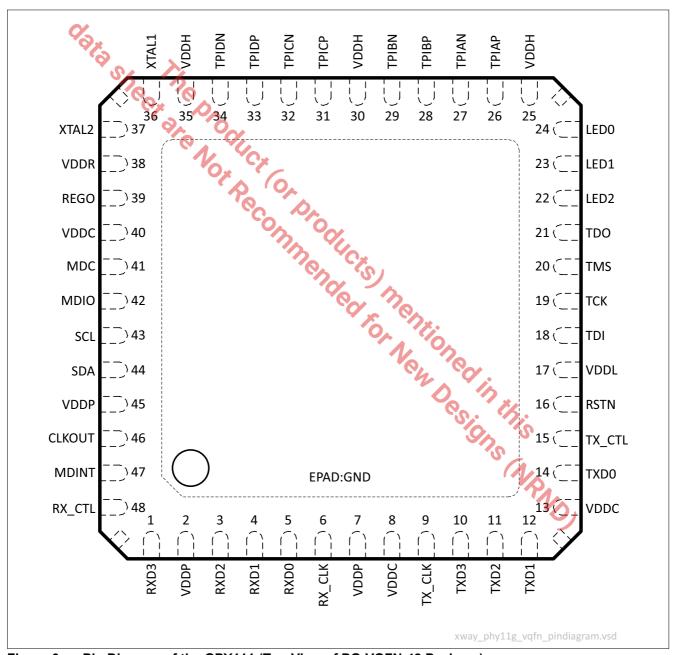


Figure 6 Pin Diagram of the GPY111 (Top View of PG-VQFN-48 Package)



# 2.2 Pin Description

In this section, all the GPY111 pins are grouped according to their functionality and described in detail in **Chapter 2.2.2** through to **Chapter 2.2.7** respectively. **Chapter 2.2.1** explains the terminology used for the pin and buffer types.

### 2.2.1 Pin Identifications

The abbreviations used in the following sub-sections for the pin types and buffer types are explained in **Table 1** and **Table 2** respectively.

Table 1 Abbreviations for Pin Types

Туре	Long Name	Remarks
I	Input pin	_
0	Output pin	_
I/O	Bi-directional pin	_
PWR	Power supply pin	_
GND	Ground pin	_

Table 2 Abbreviations for Buffer Types

Туре	Long Name	Remarks
A	Analog levels	This buffer type is used for purely analog levels. The exact electrical characteristics are specified in the corresponding sections of Chapter 6.
HD	High-speed differential	This buffer type is used for SerDes pins, for example for SGMII or 1000BASE-X. These pins are properly terminated with a resistance of $50/75~\Omega$ and must be AC-coupled. More details on the mandatory and optional external circuitry are given in Chapter 6.9.6.
PU	Internal pull-up resistor	This buffer type includes a weak internal pull-up resistor which pulls the signal to $V_{DDP}$ (logic $1_{\rm B}$ ) when left unconnected or tristated (high-impedance).
PD	Internal pull-down resistor	This buffer type includes a weak internal pull-down resistor which pulls the signal to $V_{\rm SSP}$ (logic $0_{\rm B}$ ) when left unconnected or tristated (high-impedance).
LVTTL	Digital LVTTL levels	LVTTL buffer types according to JESD8-B. Note that this buffer is only supported when the pad supply $V_{\rm DDP}$ is nominally 3.3 V.
CMOS	Digital CMOS 2v5 levels	CMOS 2v5 buffer types according to JESD8-5. Note that this buffer is only supported when the pad supply $V_{\rm DDP}$ is nominally 2.5 V.

Note: Several pins are marked as having LVTTL/CMOS buffer type. This nomenclature defines that when  $V_{DDP}$  = 3.3 V, the pin operates in LVTTL buffer type mode, and when  $V_{DDP}$  = 2.5 V, the pin operates in CMOS2v5 buffer type mode.

Note: In CMOS mode, the input pins must not be driven with LVTTL levels!



# 2.2.2 General Pins

This section describes the group of general pins required for the correct operation of the GPY111, including the clock, reset and DC/DC converter interfaces.

Table 3 General Pins

Pin No.	Name	Pin Type	Buffer Type	Function
16	RSTN	I	LVTTL/ CMOS, PU	Reset Asynchronous low-active reset of the device to default.
36	XTAL)	Thep	A	Crystal Mode: Crystal Oscillator Pin 1 A 25 MHz crystal must be connected between XTAL1 and XTAL2. Additional load capacitances must also be used to tie both pins to GND.
	REFCLK	are 1	LVTTL/ CMOS, PU	Reference Mode: Clock Input The clock input for the GPY111. This clock input can be either a 25 MHz or a 125 MHz clock. The reference clock must have a frequency accuracy of +/-50 ppm. The device automatically detects the frequency and adjusts its internal PLL accordingly.
37	XTAL2	0	A	Crystal-Mode: Crystal Oscillator Pin 2 See XTAL1.
	XTAL2			Reference-Mode: Not used  Must be left unconnected in this mode.
46	CLKOUT	0	LVTTL/ CMOS	NORMAL: Clock Output  After de-assertion of the reset signal RSTN, this pin outputs a clock signal that can have a frequency of 25 MHz. The frequency is selected via the CLKSEL field in the Physical Layer Control 2 MDIO register (default = 25 MHz).
39	REGO	0	A	Integrated DC/DC Regulator Output Provides a current output to self-supply the 1.0 V domains (V <sub>DDC</sub> , V <sub>DDL</sub> ) of the GPY111 from the V <sub>DDR</sub> supply.
				VBDL) of the Cit in the man the VBDR supply.



# 2.2.3 Media-Dependent Interface (MDI) Pins

This section describes the twisted-pair Media-Dependent Interface (MDI), which directly connects to the transformer device. No external termination resistors are required.

Table 4 Twisted-Pair Interface Pins

Pin No.	Name	Pin Type	Buffer Type	Function
26	TPIAP	I/O	Α	Differential Tx/Rx Port for Twisted-Pair A
27 <b>TPIAN</b>		-		This is the twisted-pair port A that can be directly connected to the corresponding transformer pins.
	OS SA	<i>&gt;</i>		Note: This port has a 100 $\Omega$ nominal impedance due to integrated termination resistors.
28	TPIBP C	1/00	А	Differential Tx/Rx Port for Twisted-Pair B
29	TPIBN	1/00	00%	This is the twisted-pair port B that can be directly connected to the corresponding transformer pins.
		1	N CX	Note: This port has a 100 $\Omega$ nominal impedance due to integrated termination resistors.
31	TPICP	I/O	A	Differential Tx/Rx Port for Twisted-Pair C
32	TPICN		1,000	This is the twisted-pair port C that can be directly connected to the corresponding transformer pins.
				Note: This port has a 100 $\Omega$ nominal impedance due to integrated termination resistors.
33	TPIDP	I/O	Α	Differential Tx/Rx Port for Twisted-Pair D
34	TPIDN			This is the twisted-pair port D that can be directly connected to the corresponding transformer pins.
				Note: This port has 100 Ω nominal impedance due to integrated termination resistors.
				Note: This port has 100 Ω nominal impedance due to integrated termination resistors.



# 2.2.4 Media-Independent Interface (MII) Pins

This section describes the Media-Independent Interface (MII), which connects the MAC to the GPY111. Multiplexed pins support several interface types, such as RMII, RGMII and SGMII. Due to the pin limitations and the large number of supported interfaces, the multiplexing of pins between the different interfaces can be complex. This chapter gives a detailed view of each pin. **Table 5** gives an overview of MII pin multiplexing.

Table 5 Media-Independent Interface Pins

lable 5					
Pin No.	Name	Pin Type	Buffer Type	Function	
9	Name  TX_CLK  REFCLK	I The bi	LVTTL/ CMOS, PD	RGMII: Transmit Clock The TXC signal is a continuous clock signal and provides the timing reference for the transfer of TX_EN_CTL and TXD[3:0]. The nominal frequency of this clock is 125 MHz for 1000 Mbit/s, 25 MHz for 100 Mbit/s, and 2.5 MHz for 10 Mbit/s. Depending on the speed selection, this clock is assumed to be properly adjusted by the MAC. The frequency deviation is assumed to be smaller than +/-50 ppm.	
	REFCLK		PROC	RMII: Reference Clock for the Transmit and Receive MAC I/F The REFCLK signal is used by the MAC and the PHY MII for synchronous data transfers. The nominal frequency of this clock is 50 MHz. The GPY111 optionally provides a suitable free-running 50 MHz clock on RX_CLK.	
	SCP	0	HD	SGMII: Serial Clock (Positive Pin) This is the positive signal of the differential clock pair of the SGMII SerDes interface. In conjunction with SCN, it provides a 625 MHz differential clock that is source-synchronous with SOP/SON. If a MAC with CDR is used, this pin can be left open. The SCP pin must be AC-coupled. For more details, see Chapter 6.9.6.	
6	RX_CLK	0	LVTTL/ CMOS	RGMII: Receive Clock  The RXC signal is a continuous clock signal and provides the timing reference for the transfer of RX_EN_CTL and RXD[3:0]. The nominal frequency of this clock is 125 MHz for 1000 Mbit/s, 25 MHz for 100 Mbit/s and 2.5 MHz for 10 Mbit/s. The frequency deviation is smaller than +/-50 ppm.	
	CLK50			RMII: Optional 50 MHz Reference Clock for the RMII This pin optionally provides a free-running reference clock for the RMII. This clock can be wired to the MAC and the TX_CLK of the GPY111 device. The nominal frequency of this clock is 50 MHz.	
	_			SGMII: Not Used The GPY111 drives logic zero in this mode.	



Table 5 Media-Independent Interface Pins (cont'd)

Pin No.	Name	Pin Type	Buffer Type	Function
10	TXD3		LVTTL/ CMOS, PD	RGMII: Transmit Data Bit 3 This pin carries bit 3 of the TXD[3:0] RGMII transmit data vector. It is synchronous with TXC.
	_			RMII: Not Used Should be connected to GND or driven with logic zero.
	SCN	O	HD	SGMII: Serial Clock (Negative Pin) This is the negative signal of the differential clock pair of the SGMII SerDes interface. In conjunction with SCP, it provides a 625 MHz differential clock that is source-synchronous with SOP/SON. If a MAC with CDR is used, this pin can be left open. The pin must be AC-coupled. For more details, see Chapter 6.9.6.
	SIGDET	Ore N	LVTTL/ CMOS	1000BASE-X: Signal Detect The signal detect pin is used to detect whether a valid signal is present from the FO module. The polarity of this pin can be programmed via the SDETP field in the Physical Layer Control 2 register.
11	TXD2 I LVTTL/ RGMII: Transmit Da CMOS, This pin carries bit 2		CMOS,	RGMII: Transmit Data Bit 2 This pin carries bit 2 of the TXD[3:0] RGMII transmit data vector. It is synchronous with TXC.
	_			RMII: Not Used Should be connected to GND or driven with logic zero.
	TDP1	0	HD	1000BASE-X: Transmit Data (Positive Pin) This is the positive signal of the differential transmit output pair of the 1000BASE-X SerDes interface. In conjunction with TDN1, it provides a 1.25 Gbit/s differential data signal to the fiber-optic module. This pin must be AC-coupled. For more details, see Chapter 6.9.7.
	SOP			SGMII: Serial Output (positive pin) This is the positive signal of the differential output (receive) pair of the SGMII SerDes interface. In conjunction with SON, it provides a 1.25 Gbit/s differential data signal that is source-synchronous with the differential 625 MHz clock SCP/SCN. This pin must be ACcoupled. For more details, see Chapter 6.9.6.



 Table 5
 Media-Independent Interface Pins (cont'd)

Pin No.	Name	Pin Type	Buffer Type	Function
12	TXD1	I	LVTTL/ CMOS, PD	RGMII: Transmit Data Bit 1 This pin carries bit 1 of the TXD[3:0] RGMII transmit data vector. It is synchronous with TXC.
	TXD1			RMII: Transmit Data Bit 1 This pin carries bit 1 of the TXD[1:0] RMII transmit data vector. It is synchronous with REFCLK.
	TDN1 SON	O	HD	1000BASE-X: Transmit Data (Negative Pin) This is the negative signal of the differential transmit output pair of the 1000BASE-X SerDes interface. In conjunction with TDP1, it provides a 1.25 Gbit/s differential data signal to the fiber-optic module. This pin must be AC-coupled. For more details, see Chapter 6.9.7.
	SON	101	PACC	SGMII: Serial Output (Negative Pin) This is the negative signal of the differential output (receive) pair of the SGMII SerDes interface. In conjunction with SOP, it provides a 1.25 Gbit/s differential data signal that is source-synchronous with the differential 625 MHz clock SCP/SCN. This pin must be ACcoupled. For more details, see Chapter 6.9.6.
14	TXD0	I	LVTTL/ CMOS, PD	RGMII: Transmit Data Bit 0 This pin carries bit 0 of the TXD[3:0] RGMII transmit data vector. It is synchronous with TXC.
	TXD0			RMII: Transmit Data Bit 0 This pin carries bit 0 of the TXD[1:0] RMII transmit data vector. It is synchronous with REFCLK
	RDP1			1000BASE-X: Receive Data (Positive Pin) This is the positive signal of the differential receive input pair of the 1000BASE-X SerDes interface. In conjunction with RDN1, it receives a 1.25 Gbit/s differential data signal driven by the fiberoptic module. This pin must be AC-coupled. For more details, see Chapter 6.9.7.
	SIP			SGMII: Serial Input (Positive Pin)  This is the positive signal of the differential input (transmit) pair of the SGMII SerDes interface. In conjunction with SIN, it samples a 1.25 Gbit/s differential data signal. Due to the integrated CDR, no external MAC source-synchronous clock is required. This pin must be AC-coupled. For more details, see Chapter 6.9.6.



Table 5 Media-Independent Interface Pins (cont'd)

Pin No.	Name	Pin	Buffer	Function
		Туре	Туре	
15	TX_CTL	I	LVTTL/ CMOS, PD	RGMII: Transmit Control  This pin is the transmit control signal for the TXD[3:0] RGMII transmit data vector. It is synchronous with TXC.
	TX_EN			RMII: Transmit Enable This is the transmission-enable signal driven by the MAC, and which is synchronous with REFCLK. The signal indicates valid data frames on TXD[1:0] to the PHY. The signal polarity is active high.
	RDM	Thepp	HD O	1000BASE-X: Receive Data (Negative Pin) This is the negative signal of the differential receive input pair of the 1000BASE-X SerDes interface. In conjunction with RDP1, it receives a 1.25 Gbit/s differential data signal driven by the fiberoptic module. This pin must be AC-coupled. For more details, see Chapter 6.9.7.
	SIN	1	PARCO	SGMII: Serial Input (Negative Pin) This is the negative signal of the differential input (transmit) pair of the SGMII SerDes interface. In conjunction with SIP, it samples a 1.25 Gbit/s differential data signal. Due to the integrated CDR, no external MAC source-synchronous clock is required. This pin must be AC-coupled. For more details, see Chapter 6.9.6.
48	RX_CTL	0	LVTTL/ CMOS	RGMII: Receive Control  This is the receive control signal driven by the PHY, and which is synchronous with RXC. The signal encodes the RX_DV and RX_ER signals of the GMII, according to the RGMII specification. The signal polarity is active high.
	CRS_DV			RMII: Carrier Sense and Data Valid This is the carrier sense/data valid signal driven by the PHY, and which is synchronous with REFCLK. The signal encodes the RX_DV and CRS signals of the RMII, according to the RMII specification. The signal polarity is active high.
	_			SGMII: Not Used The GPY111 drives logic zero in this mode.
CMOS This pin carries bit			RGMII: Receive Data Bit 3 This pin carries bit 3 of the RXD[3:0] RGMII receive data vector. It is synchronous with RXC.	
	_			RMII: Not Used The GPY111 drives logic zero in this mode.
	_			SGMII: Not Used The GPY111 drives logic zero in this mode.



Table 5 Media-Independent Interface Pins (cont'd)

Name	Pin Type	Buffer Type	Function
RXD2	0	LVTTL/ CMOS	RGMII: Receive Data Bit 2 This pin carries bit 2 of the RXD[3:0] RGMII receive data vector. It is synchronous with RXC.
_			RMII: Not Used The GPY111 drives logic zero in this mode.
9/2"			SGMII: Not Used The GPY111 drives logic zero in this mode.
RXD	O	LVTTL/ CMOS	RGMII: Receive Data Bit 1 This pin carries bit 1 of the RXD[3:0] RGMII receive data vector. It is synchronous with RXC.
RXD1	are A	Odly	RMII: Receive Data Bit 1 This pin carries bit 1 of the RXD[1:0] RMII receive data vector. It is synchronous with REFCLK.
_		PA	SGMII: Not Used The GPY111 drives logic zero in this mode.
RXD0	0	LVTTL/ CMOS	RGMII: Receive Data Bit 0 This pin carries bit 0 of the RXD[3:0] RGMII receive data vector. It is synchronous with RXC.
RXD0			RMII: Receive Data Bit 0 This pin carries bit 0 of the RXD[1:0] RMII receive data vector. It is synchronous with REFCLK.
_			SGMII: Not Used The GPY111 drives logic zero in this mode.
			The GPY111 drives logic zero in this mode.
	RXD2  RXD1  RXD1  - RXD0	RXD2 O	RXD2 O LVTTL/CMOS  RXD1 O LVTTL/CMOS  RXD1 O LVTTL/CMOS  RXD0 O LVTTL/CMOS  RXD0 O LVTTL/CMOS



# 2.2.5 Control Interface Pins

This section specifies the MDIO Interface according to clause 22 in [1]. The AC characteristics of this interface are defined in **Chapter 6.6.5**.

Table 6 Control Interface Pins

Pin No.	Name	Pin Type	Buffer Type	Function	
41	MDC Co	I	LVTTL/ CMOS, PD	MDIO: Management Data Clock This is the MDIO data clock signal with which the serial management interface signals on MDIO are synchronized. All MDIO signals are subject to change at the rising edge of MDC.	
42	MDIO Shee	NOTICE DI	LVTTL/ CMOS, PU	MDIO: Management Data Input/Output The management data input/output pin carries control information written by the higher-level management entity to the PHY. This includes command, address and write information. The MDIO is registered on the rising edge of MDC. The pin is pulled up in input mode only.	
47	MDINT	О	LVTTL/ CMOS	<b>MDIO:</b> Management Interrupt This pin can be used to drive an interrupt signal to the higher-level management entity. The event for which this interrupt should be issued is configurable via the MDIO registers. If no interrupt is active, then the pin is in a high-impedance state. The polarity of the pin can be set via an external pull-up (low-active MDINT) or pull-down (high-active MDINT) resistor. A value of 10 k $\Omega$ is recommended. In case multiple GPY111 devices are controlled by one higher-level management entity, these signals can be combined using a wired-or.  After the GPY111 is reset, the signal becomes active to indicate that it is ready to accept MDIO inputs. The register	
LED Inte	erface		1	Sec. 13.	
24	LED0	I/O	A	LED0  This is a freely configurable LED port that can be used to connect a preferably low-current LED.  Note: This pin reads in soft pin-strapping information during reset.	
23	LED1	I/O	A	LED1 This is a freely configurable LED port that can be used to connect a preferably low-current LED.  Note: This pin reads in soft pin-strapping information during reset.	
22	LED2	I/O	A	LED2 This is a freely configurable LED port that can be used to connect a preferably low-current LED. Note: This pin reads in soft pin-strapping information during reset.	



Table 6 Control Interface Pins (cont'd)

Pin No.	Name	Pin	Buffer	Function
FERRO	1/1 <sup>2</sup> 0/T \Alima	Type	Туре	
EEPROI	///I <sup>2</sup> C/Two-Wire	Interrace		
43	SCL	0	LVTTL/ CMOS, PU	Serial Clock This is the serial clock of the I <sup>2</sup> C interface. The maximum frequency of this interface is 1 MHz. The frequency is configurable via the soft pin-strapping pins. This clock is only active when an EEPROM is connected and during an access to the EEPROM. The duty cycle is 50%.
44	SDA	I/O	LVTTL/ CMOS, PU	Serial Data/Address This is the serial data/address of the I <sup>2</sup> C interface that shall (optionally) be connected to an external EEPROM supporting an I <sup>2</sup> C (or Two-Wire) interface. An operational mode using an external EEPROM is useful in systems without a higher-level management entity. The GPY111 automatically detects a connected EEPROM by monitoring the SDA pin after reset or power-up. This pin must be connected to GND to indicate that no EEPROM is present. If an EEPROM is present, the soft pin-strapping pins are used to define the speed and operational mode of the EEPROM interface.

# 2.2.6 JTAG Interface

This section describes the JTAG test pins used for boundary scan testing<sup>1)</sup>.

Table 7 JTAG Interface Pins

Pin No.	Name	Pin Type	Buffer Type	Function
21	TDO	0	LVTTL/ CMOS	JTAG Serial Test Data Output
18	TDI	I	LVTTL/	JTAG Serial Test Data Input
20	TMS	1	CMOS,	JTAG Test Mode Select
19	тск	I	PU	JTAG Test Clock The TDI, TDO and TMS signals are synchronized with this JTAG test clock.  Note: If the JTAG interface is not used, this pin must be tied to V <sub>DDP</sub> using a pull-up resistor!

<sup>1)</sup> JTAG reset is achieved by an internal power-on-reset module and therefore a TRST input is unnecessary. Reset of the JTAG can also be achieved using the Tap Controller Initialization Sequence as described in [8].



# 2.2.7 Power Supply Pins

This section specifies the power supply pins of the GPY111. The operating ranges of the power domains are specified in **Chapter 6.2**.

Table 8 Power Supply Pins

Pin No.	Name	Pin Type	Buffer Type	Function
25,30,35	VDDH Co	PWR		<b>High-Voltage Domain Supply</b> This is the group of supply pins for the high-voltage domain, which supplies the line driver in the PMA of the GPY111. This supply has to provide a nominal voltage of $V_{DDH} = 2.5 \text{ V}$ or $3.3 \text{ V}$ , with a worst case tolerance of $\pm 5\%$ at the respective corners.
		COX	POL	Note: For optimal power consumption, the lowest possible voltage is selected in the system.
38	VDDR	PWR 🦠	Not	Regulator Voltage Domain Supply This is the group of supply pins for the DC/DC switching regulator voltage domain, which supplies the integrated DC/DC converter of the GPY111. This supply has to provide a nominal voltage of V <sub>DDR</sub> = 2.5 V or 3.3 V, with a worst case tolerance of ±5% at the respective corners.
				Note: For optimal power consumption, the lowest possible voltage is selected in the system.
2,7,45	VDDP	PWR		Pad Voltage Domain Supply This is the group of supply pins for the pad supply of the GPY111. This supply has to provide a nominal voltage of V <sub>DDP</sub> = 2.5 V or 3.3 V, with a worst case tolerance of ±5% at the respective corners.  Note: For optimal power consumption, the lowest possible voltage is selected in the system.
17	VDDL	PWR		Low-Voltage Domain Supply This is the group of supply pins for the low-voltage domain, which supplies mixed signal blocks in the PMA of the GPY111. The supply has to provide a nominal voltage of V <sub>DDL</sub> = 1.0 V, with a worst case tolerance of ±5%.
8,13,40	VDDC	PWR		Core Voltage Domain Supply This is the group of supply pins for the core voltage domain. It supplies the digital core blocks of the GPY111. This supply has to provide a nominal voltage of V <sub>DDL</sub> = 1.0 V with a worst case tolerance of ±5%.
EPAD <sup>1)</sup>	vss	GND		General Device Ground

<sup>1)</sup> The EPAD is the exposed pad at the bottom of the package. This pad must be properly connected to the PCB ground plane.



# 3 Functional Description

**Figure 7** shows a block diagram of the GPY111 device. It also outlines the relationship of the device pins to the main functional blocks. The following sections describe the functionality of these blocks in more detail.

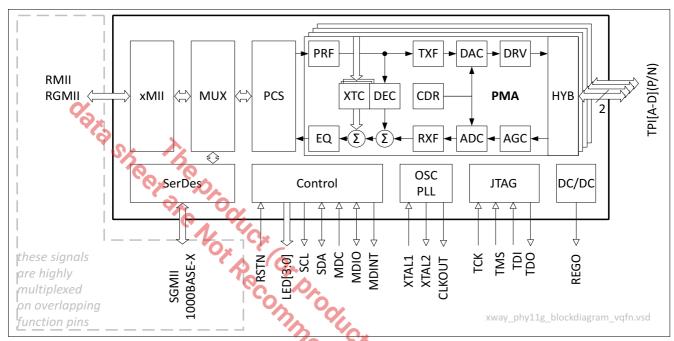


Figure 7 Functional High-Level Block Diagram of GPY111

# 3.1 Modes of Operation

The GPY111 supports various MII types, such as RMII, RGMII, and SGMII. These can be combined with two MDI modes of operation, namely those based on copper or fiber (1000BASE-X). This section outlines the supported combinations of these interfaces, as illustrated in **Table 9**.

Table 9 MII and MDI Combinations Supported by GPY111

xMII Mode (Chapter 3.2.1)	MDI Mode (Chapter 3.3.1)						
		Fiber (Chapter 3.3.1.1)					
	10BASE-T(e)	100BASE-TX	1000BASE-T	1000BASE-X			
RMII	Х	X		Fiber is only			
RGMII	Х	Х	Х	available in media-			
SGMII	X	Х	Х	converter applications!			

In general, a particular combination of MIIs and MDIs defines one of 2 different data flows:

- Copper flow
- Media-converter flow

The flows can be configured via pin-strapping (see **Chapter 3.4.1**) or after an EEPROM boot (see **Chapter 3.4.2**), and are controlled by means of the MDIO interface pins (see **Chapter 3.4.3**).



# 3.1.1 Copper Flow

In the copper flow, the operates as a standard multi-speed twisted-pair copper PHY, according to the standards defining the 10BASE-T(e), 100BASE-TX and 1000BASE-T modes of operation on the MDI. All the xMII-supported MII interface types may be used to connect to a MAC-layer device. Note that the data rate of the MDI can be restricted by the MII type used. For example, the RMII does not support the higher rates of the 1000BASE-T mode. Refer to **Table 9** for details.

### 3.1.2 Media Converter Flow

In this type of data-flow configuration, the acts as an interface between a fiber-based MDI and a copper-based MDI. In this configuration, the device does not require a MAC connection. It can operate fully unmanaged, meaning that no management entity needs to be connected to the MDIO interface.

The media-converter flow only supports the 1000 Mbit/s data rate, converting the flow of data between 1000BASE-X and 1000BASE-T. The uses auto-negotiation to resolve the proper conversion configuration. The copper MDI is forced into the correct speed mode by restricting the auto-negotiation feature to using only 1000BASE-T in full-duplex and half-duplex mode.

# 3.2 Media-Independent Interfaces (MII)

This section describes the supported MIIs of the GPY111. Each individual MII mode is investigated in detail and its particular requirements and properties are outlined.

# 3.2.1 X-speed Media-Independent Interface (xMII)

This section investigates all functional aspects of the xMII interface block.

### 3.2.1.1 xMII Signal Multiplexing

The GPY111 deals with the large variety of standard MAC interfaces (MIIs) by converting the different signaling schemes into native internal MII signals according to IEEE 802.3 [1]. This conversion is done by the xMII block on the GPY111, as illustrated in Figure 7.

Table 10 summarizes the assignment of xMII pins to standard MAC interface signals according to Chapter 2.2.4.

Table 10 xMII Signal Multiplexing

Logic Port			xMII	SerDes		
Pin Name	I/O	RMII	RGMII	SGMII	1000BASE-X	
TX_CLK	I	REFCLK	TXC	SCP	<b>1</b> /2	
TXD3	I		TXD3	SCN	SIGDET	
TXD2	I		TXD2	SOP	TDP	
TXD1	I	TXD1	TXD1	SON	TDN	
TXD0	I	TXD0	TXD0	SIP	RDP	
TX_CTL	I	TX_EN	TX_EN_CTL	SIN	RDN	
RX_CLK	0	CLK50 <sup>1)</sup>	RXC	_	-	
RX_CTL	0	CRS_DV	RX_DV_CTL	_		
RXD3	0	_	RXD3	_		
RXD2	0	RX_ER	RXD2	-	_	
RXD1	0	RXD1	RXD1	-	_	
RXD0	0	RXD0	RXD0	-	_	



1) By default, a free-running 50 MHz clock is sourced at RX CLK in RMII mode and can be used as REFCLK.

Simultaneous use of the interfaces for the various settings of FLOW and MODE, as defined in **Media-Independent Interface Control** register and **Table 17**, is further illustrated in **Table 11**. In this table, dMII refer to the xMII interface of the GPY111, but excluding the analog SGMII and 1000BASE-X interfaces.

The ANEG column reflects the sequence of auto-negotiation when two interfaces, both of which incorporate auto-negotiation, are involved.

For example, "TPI/1000BASE-X  $\rightarrow$  SGMII" means that auto-negotiation over either TPI or 1000BASE-X will happen first (depending on which interface is active), and the SGMII interface would then be set up to auto-negotiate according to the outcome of the first auto-negotiation.

Table 11 Operation of Various Interfaces for Different FLOW and MODE Settings

FLOW	MODE ?	dMII	SERDES	TPI	ANEG	RATE (Mbit/s)
Copper	RGMII 💝	RGMII	unused	used	TPI	10/100/1000
Copper	SGMII	unused	SGMII	used	TPI → SGMII	10/100/1000
Copper	RMII	RMII	unused	used	TPI	10/100
Copper	SGMII_NC	unused	SGMII_NC	used	TPI → SGMII	10/100/1000
Conv	CONV_X2T1000	unused	1000BASE-X_NA	used	TPI	1000
Conv	CONV_X2T1000A	unused	1000BASE-X	used	1000BASE-X → TPI	1000

# 3.2.1.2 xMII Signal Conditioning

To reduce the cost in materials and effort for the PCB layout, the GPY111 supports extended signal conditioning on the xMII, as depicted in **Figure 8**. The high-speed MAC interface signals are internally conditioned such that only a straight strip wire is required to connect a MAC device to the GPY111 in the receive direction. In particular, this means that configurable<sup>1)</sup> series termination resistors are integrated into the driving pad. Additionally, the RX\_CLK and TX\_CLK pins implement an adjustable delay line that allows for skewing of the clock with respect to the data. This guarantees correct data samplings in both the MAC and PHY devices.

For MAC devices that do not support internal signal conditioning, an appropriately dimensioned series resistance needs to be included on the PCB. Signal conditioning on the xMII is valid for all non-SerDes interfaces such as MII, GMII and RGMII. The integrated delay is only intended for use with the RGMII.

<sup>1)</sup> Note that tuning of outputs are not required in standard designs using PCB traces with characteristic impedance of 50  $\Omega$ . Further, this tuning is not user-configurable.



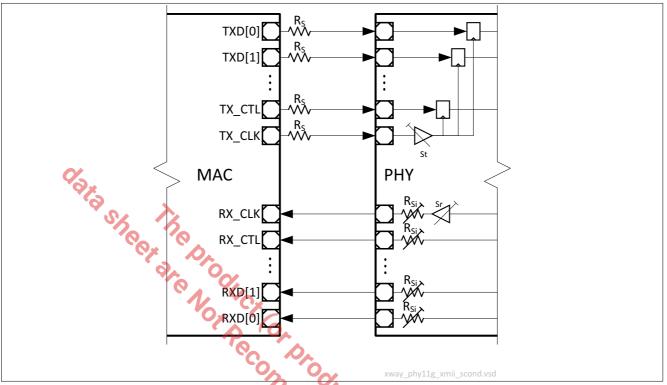


Figure 8 xMII Signal Conditioning between MAC and GPY111

# 3.2.2 Reduced Media-Independent Interface (RMII)

The Reduced Media-Independent Interface (RMII) implements a MAC interface with a reduced pin count, but only supporting speeds of 10 Mbit/s and 100 Mbit/s. If the MAC interface is configured in RMII mode, then the GPY111 device does not negotiate 1000 Mbit/s functionality and therefore behaves like a fast Ethernet PHY.

The RMII is fully compliant with the specification of the RMII consortium [11]. The pin-to-signals mapping is defined in **Table 10**. As a special feature of the GPY111, the RX\_CLK pin drives a continuous 50 MHz clock that can be used as the reference clock (CLK50). This clock is free-running and not locked to the receiver clock. The elastic buffering as required by [11] is performed in the PHY. The RX\_CLK pin can be connected to the REFCLK pins of both the PHY and the MAC devices.

# 3.2.3 Reduced Gigabit Media-Independent Interface (RGMII)

The RGMII implements a MAC interface that can be used for all supported speeds, that is at 10 Mbit/s, 100 Mbit/s and 1000 Mbit/s, but with a reduced pin count when compared to a GMII. This interface is implemented according to the RGMIIv1.2 [9] and RGMIIv2.0<sup>1)</sup> [10] specification, and is therefore referred to as RGMII-ID. The mapping of standardized signals to device pins is defined in **Table 3**.

The transfer of data between the MAC and PHY devices is handled via a clock signal, a control signal and a four-bit data vector in both the transmit and receive directions. The clock signal is always driven by the signal source, that is the MAC in the transmit direction and PHY in the receive direction. The control and data signals change with both the rising and falling edges of the driving clock.

The nominal driving clock frequency at data speeds in gigabits is of 125 MHz. Lower speeds of 10 Mbit/s and 100 Mbit/s can be achieved by reducing the clock frequency to 2.5 MHz and 25 MHz respectively. At these speed grades, the higher half of the data octet has no content. Instead, the GPY111 device accepts a replicated version of TXD[3:0] on the falling clock edge, thus reducing power consumption. This is not possible for the TX\_CTL and

<sup>1)</sup> HSTL logic drivers are not supported. Instead standard LVTTL drivers are used.



RX\_CTL control signals, as these still need to multiplex the GMII\_TX\_EN/GMII\_TX\_ER and the GMII\_RX\_EN/GMII\_RX\_DV signals.

In order to reduce the power consumption on this interface, the RGMII specification defines a special coding of these control signals such that:

```
TX_EN = GMII_TX_EN

TX_ER = GMII_TX_EN XOR GMII_TX_ER

RX_EN = GMII_RX_EN

RX ER = GMII_RX_DV XOR GMII_RX_ER
```

The TX\_CTL signal transports the TX\_EN subject to the rising edge, whereas TX\_ER is driven by the falling edge of the TX\_CLK. The RX\_CTL signal is defined in the same way as TX\_CTL. The exact encoding for TX\_CTL and RX\_CTL is depicted in **Table 12** and **Table 13**, respectively. As can be seen in **Table 13**, the GPY111 supports in-band status via RGMII.

The AC characteristics of the RGMII are specified in **Chapter 6.6.7**. In order to simplify PCB design, the GPY111 supports XMII signal conditioning between MAC and PHY, as described in **Chapter 3.2.1.2**. The clock signals can be delayed using a programmable skew value, in order to obtain a robust setup and hold the time relationships between the clock and the data/control signals at the receiving pins. The programmability of the skew value addresses the particularities of the given PCB environment in which the GPY111 device is embedded.

Supported test loops (**Chapter 3.6.3**) can be activated at any time. The speed at which the test loop operates depends on the state of the transceiver. Activating a test loop during an active link implies that the currently selected link speed, for example after auto-negotiation (**Chapter 3.3.2**) or auto-downspeed (**Chapter 3.3.3**) is used. Otherwise the test loop is operated at the speed grade specified by the registers (0.13) and (0.6).

Table 12 Transmit Control Encoding

TX_CTL	GMII_TX_EN	GMII_TX_ER	TXD[7:0]	Description
↑0↓0	0	0	00 <sub>H</sub> FF <sub>H</sub>	Normal inter-frame
↑0↓1	0	1	00 <sub>H</sub>	Reserved
↑0↓1	0	1	01 <sub>H</sub>	Low-power IDLE assert
<u></u> †0↓1	0	1	02 <sub>H</sub> 0E <sub>H</sub>	Reserved
<u></u> †0↓1	0	1	0F <sub>H</sub>	Carrier extend
†0↓1	0	1	10 <sub>H</sub> FE <sub>H</sub>	Reserved
<u></u> †0↓1	0	1	1F <sub>H</sub>	Carrier-extend error
<u></u> †0↓1	0	1	20 <sub>H</sub> FF <sub>H</sub>	Reserved
↑1↓1	1	0	00 <sub>H</sub> FF <sub>H</sub>	Transmit data frame
<b>↑1↓0</b>	1	1	00 <sub>H</sub> FF <sub>H</sub>	Transmit error propagation

Table 13 Receive Control Encoding

RX_CTL	GMII_RX_DV	GMII_RX_ER	RXD[7:0]	Description	PHY Status
	0	0	xxx0xxx0 <sub>B</sub>	Normal inter-frame	Link down
			xxx1xxx1 <sub>B</sub>		Link up
	0	0	x00xx00x <sub>B</sub>	Normal inter-frame	RX_CLK = 2.5 MHz
			x01xx01x <sub>B</sub>		RX_CLK = 25 MHz
			x10xx10x <sub>B</sub>		RX_CLK = 125 MHz
			x11xx11x <sub>B</sub>		Reserved



Table 13 Receive Control Encoding (cont'd)

	GMII_RX_DV	GMII_RX_ER	RXD[7:0]	Description	PHY Status
↑0↓0	0	0	0xxx0xxx <sub>B</sub>	Normal inter-frame	Half-duplex mode
			1xxx1xxx <sub>B</sub>		Full-duplex mode
↑0↓1	0	1	00 <sub>H</sub>	Reserved	
↑0↓1	0	1	01 <sub>H</sub>	Low-power IDLE assert	
↑0↓1	0	1	02 <sub>H</sub> 0D <sub>H</sub>	Reserved	
↑0↓1	0	1	0E <sub>H</sub>	False carrier indication	False carrier present
↑0↓1 <b>9</b>	0	1	0F <sub>H</sub>	Carrier extend	EXTEND
↑0↓1	0	1	10 <sub>H</sub> FE <sub>H</sub>	Reserved	
↑0↓1	0,0	1	1F <sub>H</sub>	Carrier-extend error	ZERO, ONE
†0↓1	000*	1	20 <sub>H</sub> FE <sub>H</sub>	Reserved	
†0↓1	0 6	b	FF <sub>H</sub>	Carrier sense	PLS_Carrier.Indicate
<b>↑1↓1</b>	1	0 0	00 <sub>H</sub> FF <sub>H</sub>	Receive data frame	ZERO, ONE
<u>↑1↓0</u>	1	0. 0	00 <sub>н</sub> FF <sub>н</sub>	Receive data error	ZERO, ONE
			nmen	C	
			n <sub>mende</sub>	Receive data frame Receive data error	



### 3.2.4 Serial Gigabit Media-Independent Interface (SGMII)

The Serial Gigabit Media-Independent Interface (SGMII) implements a MAC interface that can be used for all supported speeds, namely 10 Mbit/s, 100 Mbit/s and 1000 Mbit/s. This interface is implemented according to the SGMII [13] specification.

The mapping of the standardized signals to the device pins is shown in Table 3. Note that the integrated SGMII uses Clock and Data Recovery (CDR) to extract the TXCLK clock from the TX data. This significantly reduces cost and power.

The RXCLK is driven as specified by the standard, but can be switched off via MDIO to reduce power, in case the of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter 3.6.
Prequired to conn.

Constant of the E.
Chapter MAC also supports CDR.

The AC characteristics of the SGMII are described in Chapter 6.6.8.

Supported test loops (Chapter 3.6.3) can be activated at any time.

The external circuitry required to connect the GPY111 properly via SGMII is described in Chapter 6.9.6.



### 3.3 Media Functions

This chapter describes the media functions supported by the GPY111.

# 3.3.1 Media-Dependent Interfaces (MDI)

This section describes the Media-Dependent Interfaces (MDIs) that are supported by the GPY111.

# 3.3.1.1 Copper Interface

The Twisted-Pair Interface (TPI) of the GPY111 is fully compliant with IEEE 802.3 [1]. To facilitate low-power implementation and reduce PCB costs, the series resistors that are required to terminate the twisted-pair link to nominally  $100 \,\Omega$  are integrated into the device. As a consequence, the TPI pins (see Chapter 2.2.3) can be directly connected via the transformer to the RJ45 plug. Additional external circuitry is only required for proper common-mode termination and rejection.

The electrical characteristics of the transformer and the plug are outlined in **Chapter 6.9.3** and **Chapter 6.9.4**, respectively. A high-level schematic of the TPI circuitry is shown in **Figure 9**, taking these components into account.

The twisted-pair wires are connected to the RJ45 plug pins according to the specification in [5]. The common-mode external circuitry is described in **Chapter 6.9.5**.

Note that the twisted-pair port C is terminated with high-precision, high-ohmic resistors R<sub>CAL</sub>, which are in turn connected to the common-mode ground. This configuration is only required for the port C and is used to auto-calibrate the IC after reset.

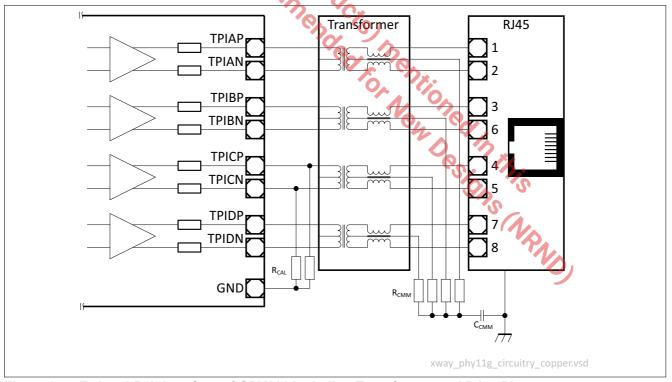


Figure 9 Twisted-Pair Interface of GPY111 Including Transformer and RJ45 Plug



#### 3.3.1.2 Fiber Interface

Using the integrated SerDes module, the supports fiber-based PHY Ethernet applications compliant with IEEE 802.3, clause 36 [1] (1000BASE-X). 1000BASE-X-specific auto-negotiation, according to IEEE 802.3 clause 37 [1], is also supported. A signal-detect input is optionally available to indicate the signal status from the optics module to the . The external circuitry and wiring connection to the optics module is specified in **Chapter 6.9.7**. Accordingly, **Chapter 6.6.9** specifies the timing characteristics of this interface.

Note that the integrated SerDes is compatible with both 1000BASE-X and the SGMII standard, which in turn means that the differential high-speed pins can operate in both modes, depending on the configuration. However, since GPY111 integrates only one SerDes, this means that only one of these interface modes can be operated at any one time.

The fiber interface supports only speeds of 1000 Mbit/s; it is only compatible with gigabit-speed MIIs.

#### 3.3.2 Auto-Negotiation

The GPY111 supports self-contained Auto-Negotiation (ANEG) as a startup procedure to exchange capability information with the link partner. Unless ANEG is manually disabled using the MDIO.STD.CTRL.ANEN register, the GPY111 will initiate each link-up using an ANEG procedure. This is recommended by the IEEE and essentially required for the 1000BASE-T mode.

ANEG is done after the following events:

- Power up
- Software power up (MDIO.STD.CTRL.PD =  $\downarrow 0_B$ )
- Hardware reset
- Software reset (MDIO.STD.CTRL.RST = 10g
- Command to restart ANEG (MDIO.STD.CTRL.ANRS = 10.
- · Link-down

Unless otherwise configured, the GPY111 carries out an auto-crossover detect/enable procedure prior to the start of the ANEG process. This ensures optimal interoperability even in inadequate cable infrastructure environments. However, if ANEG is disabled, the auto-crossover procedure is still done during link-up. More details are given in Chapter 3.3.4.

The implementation of the ANEG procedure is compliant with the standards given in IEEE 802.3, clause 28 ([1]). If the link partner does not support ANEG, the GPY111 extracts the link-speed configuration using parallel detection. Once this is detected, the PHY links up at the speed of the link partner. Since the duplex mode cannot be extracted during parallel detection, the duplex mode is set to half-duplex, which also works in case the link partner operates in full-duplex mode. Since ANEG is a mandatory feature for 1000BASE-T transceivers, the GPY111 only does parallel detection for 10BASE-T and 100BASE-TX.

The default advertisements during ANEG are according to standard. **Chapter 3.4** specifies how these settings can be overwritten with other values.

The GPY111 supports Next Page (NP) exchange, since this is mandatory for advertising 1000BASE-T capabilities. By default, NPs are exchanged autonomously and do not require interaction with any management device. If no NPs are intended to be transmitted by the management device, the MDIO.STD.AN\_NPTX.NP register bit should be set to logic  $1_B$ .

If the GPY111 is configured in a particular MAC interface mode which does not support all PHY speeds, the ANEG-capability registers are automatically restricted to the MAC speeds possible. More details about the MAC interfaces and the supported speed modes are listed in **Table 9**.

When the GPY111 is configured to operate with a MAC via the SGMII, the SGMII also incorporates autonegotiation on the MAC-to-PHY interface. This auto-negotiation is automatically initiated by the GPY111 whenever there are link-speed changes on the TPI. This means that, after ANEG is completed on the TPI-side, the link speed is advertised to the MAC via the SGMII ANEG capability.



# 3.3.3 Auto-Downspeed

The Auto-Downspeed (ADS) feature ensures maximum interoperability even in harsh or inadequate cable infrastructure environments. In particular, ADS is applied during 1000BASE-T training. This is necessary because the information available about the cabling during ANEG is insufficient. It is possible to advertise 1000BASE-T during ANEG, even though it might happen that both link partners are connected via a CAT-3 cable, which does not support the 4-pair Gigabit Ethernet mode. In order to avoid continuous link-up failures in such a situation, the GPY111 operates a detection algorithm to identify this situation. As a consequence, Gigabit-capability indication is cleared from the ANEG registers. After the resulting link-down, the next ANEG process does not advertise 1000BASE-T anymore, such that even when the link partner does not implement this kind of ADS algorithm, the next link-up will be done at the next advertised speed below 1000 Mbit/s.

It can also happen that the existing cable infrastructure is adequate, but that the integrity of received signals is not suitable for a 1000BASE-T link-up, for example due to increased alien noise, or over-length cables. If such a condition is detected, the GPY111 also does an ADS procedure.

Finally, it can also happen that, even though the GPY111 is able to link up properly, for example in slave mode, the link partner is not able to. In this situation, ADS criterion described previously does not become active, but the link also never comes up. In order to address this corner situation, the GPY111 counts the number of attempts to link up to 1000BASE-T. If this number is greater than 3, the ADS procedure is carried out. This number is reset internally after each successful 1000BASE-T link-up.

In all flow and mode settings that support only speeds of 1000 Mbit/s, the ADS feature is automatically disabled.

#### 3.3.4 Auto-Crossover and Polarity-Reversal Correction

In order to maximize interoperability even in inadequate wiring environments, the GPY111 supports autocrossover<sup>1)</sup> and polarity-reversal detection and correction. Both features are enabled by default.

Auto-crossover detection and correction operates at all supported twisted-pair speeds. The supported pair-mappings detectable and correctable by the device are listed in **Table 14**. However, in 10BASE-T and 100BASE-TX, pairs C and D are not used. Consequently, mode 2 and 3 as well as 1 and 4 are identical. However, in 1000BASE-T all modes are applicable.

The auto-crossover functionality is fully compliant with IEEE 802.3 [1], clause 40.4.4, in 1000BASE-T mode. In the 10BASE-T and 100BASE-TX modes, this functionality depends on the detection of valid link pulses.

Table 14 Supported Twisted-Pair Mappings

	• • • • • • • • • • • • • • • • • • • •						-70		
Cro	ssover Modes on a RJ45 <sup>1)</sup>				RJ45 F	Pinning	0.		
#	Description	1	2	3	4	5	6	7	8
1	Normal, straight CAT5 cable	TPIAP ( <b>A+</b> )	TPIAN (A-)	TPIBP <b>(B+)</b>	TPICP (C+)	TPICN (C-)	TPIBN (B-)	TPIDP ( <b>D+</b> )	TPIDN (D-)
2	Fast Ethernet-only MDI-X	TPIBP (B+)	TPIBN (B-)	TPIAP <b>(A+)</b>	TPICP (C+)	TPICN (C-)	TPIAN (A-)	TPIDP ( <b>D+</b> )	TPIDN (D-)
3	Full Gigabit Ethernet MDI-X	TPIBP (B+)	TPIBN (B-)	TPIAP ( <b>A+</b> )	TPIDP (D+)	TPIDN ( <b>D-</b> )	TPIAN (A-)	TPICP (C+)	TPICN (C-)
4	Normal, straight CAT5 cable with C/D pair-swap	TPIAP (A+)	TPIAN (A-)	TPIBP <b>(B+)</b>	TPIDP (D+)	TPIDN ( <b>D-</b> )	TPIBN (B-)	TPICP (C+)	TPICN (C-)

<sup>1)</sup> Pin assignment according to TIA/EIA-568-A/B

Polarity-reversal errors caused by improper wiring are automatically corrected by the GPY111. This correction is done on all pairs in the receive direction for all supported twisted-pair media modes. In 10BASE-T mode, the

<sup>1)</sup> A subset of this feature is also known as MDI/MDI-X from 10BASE-T and 100BASE-TX.



polarity correction is based on the detection of valid link pulses. In 100BASE-TX, the polarity of the receive signal is inherently corrected by the negation invariance of line code. In the 1000BASE-T mode, polarity detection is part of the training sequence. In all the modes, the detected polarity is frozen once the link has been established, and remains unchanged until the link is dropped.

The status of the polarity detection is indicated in MDIO.PHY.PHYSTAT1 (PHY\_PHYSTAT1). Polarity can also be controlled using MDIO.PHY.PHYCTL1 (PHY\_PHYCTL1).

#### 3.4 Configuration, Control and Status Functions

This chapter investigates control and configuration of the GPY111. It distinguishes between control and configuration operations. Configuration of the device can be done either via pin-strappings (Chapter 3.4.1) or via configuration content on an external EEPROM (Chapter 3.4.2). Configuration and control can be done using the MDIO interface (Chapter 3.4.3.1), according to IEEE 802.3 [1]. Furthermore, the chapter outlines how status information can be extracted from the GPY111, either using the LED pins (Chapter 3.4.4), or by using a higher-level management entity on the MDIO interface together with an external interrupt (Chapter 3.4.3.3).

Figure 10 illustrates the configuration flow in the form of a flow chart. Note that configuration is only performed once after hardware reset or power-up. A simple software reset does not restart the configuration sequence. MDIO configuration and control access can only start after the configuration sequence has finished. The GPY111 indicates the time at which this is possible by clearing the MDIO reset register (MDIO.STD.CTRL.RST = 0<sub>B</sub>).



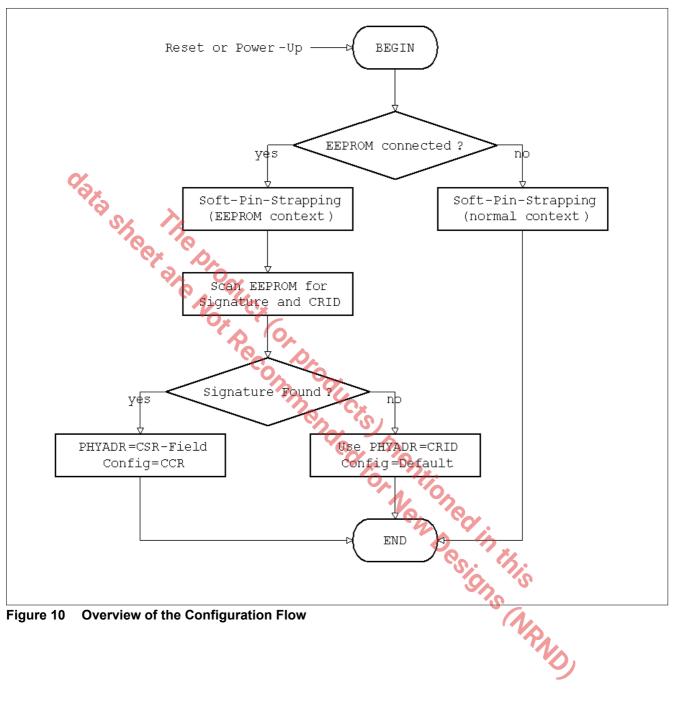


Figure 10 Overview of the Configuration Flow




#### 3.4.1 Configuration of GPY111 via Pin-Strapping

This section describes the configuration of the GPY111 by means of pin-strapping. The limited pin count of the device means that reserving enough pins to encode all the configuration bits (by simply pulling these pins to V<sub>DDP</sub> or V<sub>SS</sub> in order to encode a logic one or zero respectively) is not a feasible option. Instead, the device supports soft pin-strapping using external resistors and capacitors<sup>1)</sup>.

Using this technology, an entire bit vector can be read on one pin, instead of just a single configuration bit. The content of the bit vector is determined by the component value of the pull-down resistor or capacitance used. The component value of this resistor is measured by the GPY111 shortly after reset.

A schematic of the required external circuitry is shown in Figure 11.

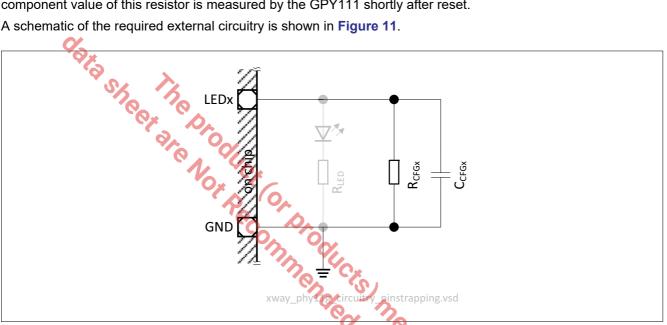

**Soft Pin-Strapping External Circuitry** 

As shown in the figure, a further saving in pin count is achieved by sharing the pins used to drive LEDs (LEDx) with the pin-strapping configuration. The choice of soft pin-strapping configuration component values is such that normal LED operation is left unaffected. The LED components are shown in gray in Figure 11. Note that the pinstrapping passive components weakly tie the LEDx pin to the chip's ground. More details on the external circuitry for using LEDs can be found in Chapter 3.4.4.

A 4-bit vector is encoded by the appropriate choice of component values. The relationship between component (NANO) values and the soft pin-strapping bit vector is shown in Table 15.

The encoding of soft pin-strappings is such that the use of external capacitors is rarely needed.



Table 15 Soft Pin-Strapping: Mapping of Pull-Down Capacitance/Resistor Values to Configuration Bits

Capacitance Value <sup>1)</sup>	Resistor Value <sup>2)</sup>	Soft Pin-S	trapping Confi	guration Bit Vect	or CBV[3:0]
		CBV[3]	CBV[2]	CBV[1]	CBV[0]
Not mounted, 0 nF	11.00 kΩ	0 <sub>B</sub>	0 <sub>B</sub>	O <sub>B</sub>	O <sub>B</sub>
	8.66 kΩ	0 <sub>B</sub>	0 <sub>B</sub>	0 <sub>B</sub>	1 <sub>B</sub>
	6.81 kΩ	0 <sub>B</sub>	0 <sub>B</sub>	1 <sub>B</sub>	O <sub>B</sub>
	5.23 kΩ	0 <sub>B</sub>	0 <sub>B</sub>	1 <sub>B</sub>	1 <sub>B</sub>
0/2	3.92 kΩ	0 <sub>B</sub>	1 <sub>B</sub>	0 <sub>B</sub>	O <sub>B</sub>
O'ATA O	2.74 kΩ	0 <sub>B</sub>	1 <sub>B</sub>	0 <sub>B</sub>	1 <sub>B</sub>
S.	1.78 kΩ	0 <sub>B</sub>	1 <sub>B</sub>	1 <sub>B</sub>	0 <sub>B</sub>
	0.91 kΩ	0 <sub>B</sub>	1 <sub>B</sub>	1 <sub>B</sub>	1 <sub>B</sub>
Mounted, 100 nF	11.00 kΩ	1 <sub>B</sub>	0 <sub>B</sub>	0 <sub>B</sub>	0 <sub>B</sub>
	8.66 kΩ	1 <sub>B</sub>	0 <sub>B</sub>	0 <sub>B</sub>	1 <sub>B</sub>
	6.81 kΩ	C* 1 <sub>B</sub>	0 <sub>B</sub>	1 <sub>B</sub>	0 <sub>B</sub>
	5.23 kΩ	1 <sub>B</sub>	0 <sub>B</sub>	1 <sub>B</sub>	1 <sub>B</sub>
	3.92 kΩ	1 <sub>B</sub>	1 <sub>B</sub>	0 <sub>B</sub>	0 <sub>B</sub>
	2.74 kΩ	0 1 <sub>B</sub> 0	1 <sub>B</sub>	0 <sub>B</sub>	1 <sub>B</sub>
	1.78 kΩ	1 <sub>B</sub>	1 <sub>B</sub>	1 <sub>B</sub>	O <sub>B</sub>
	0.91 kΩ	1 <sub>B</sub> C	1 <sub>B</sub>	1 <sub>B</sub>	1 <sub>B</sub>

<sup>1)</sup> A maximum tolerance of 10% on temperature and aging must be guaranteed. Ceramic-type capacitors are suggested.

The soft pin-strapping configuration is read from all three LED pins after device reset. It is possible to encode a total of 12 information bits. **Table 16** outlines the mapping of bits to the supported pin-strapping device parameters. In this table, each row represents a bit vector read from one of the configuration pins. Each column corresponds to a bit position in the configuration bit vector. Note that this table is only valid in the case that no EEPROM is connected to the GPY111. If a configuration EEPROM is connected, the soft pin-strapping device parameters are mapped to different functions, as described in **Table 18**. **Chapter 3.4.2** gives more details on EEPROM-based device configuration.

Table 16 Mapping of Configuration Pins/Bits to Device Parameters (No EEPROM Connected)

<b>Configuration Pin</b>	CBV[3:0] associated by resistor value according to Table 15												
	CBV[3]	CBV[2]	CBV[1]	CBV[0]									
LED0	MDIOADR[3]	MDIOADR[2]	MDIOADR[1]	MDIOADR[0]									
LED1	MDIOADR[4]	MODE[1]	MODE[0]	FLOW									
LED2	CONF[1]	CONF[0]	ANEG[1]	ANEG[0]									

The functions of the device parameters mapped in Table 16 are described in Table 17.

<sup>2)</sup> A maximum tolerance of 1% on temperature and aging must be guaranteed. Resistances are taken from the E96 series.



Table 17 Functions of Device Parameters Controlled by Soft Pin-Strapping (No EEPROM Connected)

Device Parameter	Function									
MDIOADR[4:0]	Sets the MDIO PHY address to which the GPY111 responds during MDIO transactions.									
FLOW	Specifies the signal flow of the GPY111.									
	0 <sub>B</sub> Copper MAC interface to twisted-pair mode									
	1 <sub>B</sub> <b>Converter</b> converts fiber (1000BASE-X, SerDes) to twisted pair									
MODE[1:0]	Configures the functional mode of the GPY111. The meaning of these bits depends on the FLOW setting.									
9,	FLOW = Copper:									
	00 <sub>B</sub> <b>RGMII</b> - the MAC connects to the GPY111 via RGMII									
S.	01 <sub>B</sub> <b>SGMII</b> - the MAC connects to the GPY111 via SGMII									
	10 <sub>B</sub> RMII - the MAC connects to the GPY111 via RMII									
	11 <sub>B</sub> reserved									
	Q' O'									
	FLOW = Converter:									
	00 <sub>B</sub> <b>X2T1000</b> - convert 1000BASE-X to 1000BASE-T									
	01 <sub>B</sub> X2T1000A - convert 1000BASE-X (with ANEG) to 1000BASE-T									
	10 <sub>B</sub> reserved									
	11 <sub>B</sub> reserved									
CONF[1:0]	Used to specify the transmit and receive timing skew in the RGMII mode using the									
	integrated delay generation on TX_CLK/RX_CLK. The meaning of these bits depends on									
	the FLOW setting. <sup>1)</sup>									
	FLOW = Copper:									
	X0 <sub>B</sub> RGMII_TXSKEW_1N5 - Transmit timing skew is 1.5 ns									
	X1 <sub>B</sub> RGMII_TXSKEW_0N0 - Transmit timing skew is 0.0 ns									
	0X <sub>B</sub> RGMII_RXSKEW_1N5 - Receive timing skew is 1.5 ns 1X <sub>B</sub> RGMII_RXSKEW_0N0 - Receive timing skew is 0.0 ns									
	IVB KOMII_KXSKEW_ONO - Neceive tilling skew is 0.0 lis									
ANEC(1.0)	Configures the outs pagetistics behavior of the CRM111 The magning of those bits									
ANEG[1:0]	Configures the auto-negotiation behavior of the GPY111. The meaning of these bits depends on the FLOW setting.									
	depends on the LOW setting.									
	FLOW = Copper:									
	00 <sub>B</sub> <b>DEFAULT</b> - advertise 10/100/1000 Mbit/s in both full and half duplex									
	01 <sub>B</sub> <b>FASTHDX</b> - advertise 10/100 Mbit/s in half duplex and 1000 Mbit/s in both full and									
	half duplex									
	10 <sub>B</sub> <b>GIGAONLY</b> - advertise only 1000 Mbit/s in both full and half duplex									
	11 <sub>B</sub> <b>FASTONLY</b> - advertise only 10/100 Mbit/s in both full and half duplex									
	FLOW = Converter:									
	00 <sub>B</sub> reserved									
	01 <sub>B</sub> reserved									
	10 <sub>B</sub> reserved									
	11 <sub>B</sub> reserved									

<sup>1)</sup> The initial duplex mode is determined by the default value of MDIO.STD.CTRL.DPLX.



Table 18 Mapping of Configuration Pins/Bits to Device Parameters (EEPROM is Connected)

Configuration Pin	CBV[3:0] associated by resistor value according to Table 15												
	BV[3]	BV[2]	BV[1]	BV[0]									
LED0	O <sub>B</sub>	SPEED[1]	SPEED[0]	ADRMODE									
LED1	SIZE[1]	DEVADR[2]	DEVADR[1]	DEVADR[0]									
LED2	SIZE[0]	CRID[2]	CRID[1]	CRID[0]									

The functions of the device parameters mapped in Table 18 are defined in Table 19.

Table 19 Functions of Device Parameters controlled by Soft Pin-Strapping (EEPROM is Connected)

Device Parameter	Function
ADRMODE	Specifies the EEPROM Addressing Mode
	0 <sub>B</sub> 11-bit EEPROM addressing mode (see also Chapter 3.4.2.4.1)
	1 <sub>B</sub> 16-bit EEPROM Addressing Mode (see also Chapter 3.4.2.4.2)
DEVADR[2:0]	Specifies the EEPROM Device Address
	The device address can be specified in case multiple EEPROM devices are connected to
	the same I <sup>2</sup> C bus. The valid mapping of device address bits into the frame is specific to
	the ADRMODE (see Chapter 3.4.2.4 for more details). In general, the DEVADR bits are
	mapped MSB-aligned into bits 3:1 of the I <sup>2</sup> C instruction field. Note that some larger
	devices in 11-bit mode also use these bits for internal addressing. The GPY111 supports
	this feature, meaning that the DEVADR is OR-combined with the corresponding memory
	address bits. It is important to apply logic zeros wherever this overlap is present. In 11-bit
	addressing mode there are overlays for EEPROMs with a capacity larger than 4 kb.
CRID[2:0]	Specifies the Configuration Record ID
	The configuration record ID can be specified in case multiple PHYs source information
	from an EEPROM device, in which case this contains multiple configuration record ID
	entries. The CRID is part of the configuration record ID header, allowing for storage of one
	distinct record for each PHY accessing the EEPROM (see Chapter 3.4.2.4 for more
	details). Note that in case the CRID is not found in the EEPROM, the GPY111 uses the
	specified CRID as the MDIO address, with the two MSBs set to zero.



Table 19 Functions of Device Parameters controlled by Soft Pin-Strapping (EEPROM is Connected)

Device Parameter	Function
SPEED[1:0]	Specifies the EEPROM Access Speed  00 <sub>B</sub> STANDARD - EEPROM is accessed at F <sub>SCL</sub> = 100 kHz serial clock speed  10 <sub>B</sub> FASTMODE - EEPROM is accessed at F <sub>SCL</sub> = 400 kHz serial clock speed  01 <sub>B</sub> MEGASPEED - EEPROM is accessed at F <sub>SCL</sub> = 1 MHz serial clock speed  11 <sub>B</sub> HIGHSPEED - EEPROM is accessed at F <sub>SCL</sub> = 3.4 MHz serial clock speed
SIZE[1:0]	Specifies the EEPROM Scan Size  This parameter defines the EEPROM scan size, which is the address range of the EEPROM in which the configuration record (more details in Chapter 3.4.2.3) is searched for during boot-up or after reset of the GPY111. The physical size of the EEPROM is less important. The configuration signature record may contain pointer addresses to an address beyond the limit specified here. The scan starts at EEPROM address 0000 <sub>H</sub> . In order to yield a constant worst-case scan time over all supported EEPROM scan sizes, the address increment for the EEPROM configuration record scan is adjusted automatically, depending on the scan size, as follows:  ADRMODE = 0 <sub>B</sub> .  SIZE[1:0] = 00 <sub>B</sub> <2 kb - scan up to 256 byte-addresses in steps of 32  SIZE[1:0] = 10 <sub>B</sub> 8 kb - scan up to 1024 byte-addresses in steps of 128  SIZE[1:0] = 11 <sub>B</sub> 16 kb - scan up to 2048 byte-addresses in steps of 512  SIZE[1:0] = 00 <sub>B</sub> 32 kb - scan up to 4096 byte-addresses in steps of 512  SIZE[1:0] = 01 64 kb - scan up to 8192 byte-addresses in steps of 1024
	SIZE[1:0] = 10 <sub>B</sub> <b>128 kb</b> - scan up to 16384 byte-addresses in steps of 2048 SIZE[1:0] = 11 <sub>B</sub> <b>&gt;256 kb</b> - scan up to 32768 byte-addresses in steps of 4096



### 3.4.2 Configuration of GPY111 via External EEPROM

This chapter describes the operation of the GPY111 with an externally connected EEPROM.

#### 3.4.2.1 **EEPROM Applications**

Connection of an external EEPROM is used to enable the implementation of systems without any higher-level management entity to drive the control and configuration information on the MDIO interface (see **Chapter 3.4.3**). In addition, it is not possible to completely configure GPY111 functionality using only the soft pin-strapping interface (see **Chapter 3.4.1**). In such applications, the external EEPROM provides a cheap and efficient solution for storing all the configuration information that needs to be loaded by the GPY111 during startup.

The GPY111 supports various EEPROM devices by means of its I<sup>2</sup>C interface (see **Chapter 2.2.5**, pins SDA and SCL). The devices supported are listed in **Table 20**. Devices from other silicon vendors that are not listed in **Table 20** and which support I<sup>2</sup>C may also be supported, but are not tested by MaxLinear.

Table 20 Supported EEPROM Devices

Vendor	Device	Remark
AMTEL	AT24Cxx	Proper size selection by customers
CATALYST	CAT24Cxx	Proper size selection by customers
STM	M24Cxx	Proper size selection by customers

In the simplest application, the EEPROM is only used to store configuration information of the GPY111. In particular, this contains the defaults for the internal MDIO registers. This configuration is loaded by the GPY111 directly after reset or power-up if an EEPROM has been detected. In order to support the sharing of a larger EEPROM device by several master devices, for example if an additional microcontroller also loads its configuration from the same device, the GPY111 scans the EEPROM content for a particular signature that corresponds to its configuration record. The GPY111 loads this configuration record and overrides its internal defaults. A detailed description of the configuration record is given in Chapter 3.4.2.3.

A more sophisticated type of application is used to enhance the functionality of the GPY111 by loading embedded firmware from the external EEPROM. The integrated device controller on the GPY111 is able to execute code from the external EEPROM. In order to reduce the load on the I<sup>2</sup>C interface, this code is loaded into the GPY111 before execution. It is possible to change the existing functionality by modifying parts of the integrated firmware, as well as to extend its functionality by adding new firmware blocks. Dedicated support from system vendor is required for this type of feature. The externally embedded firmware is also stored within the configuration record. Further details are specified in **Chapter 3.4.2.3**.

#### 3.4.2.2 EEPROM Detection

The GPY111 automatically detects whether or not an external EEPROM is connected, by sensing the SDA pin during startup. Since the SDA pin is equipped with an internal pull-up resistor to comply with the  $I^2C$  specification, it is assumed that an EEPROM is connected when this pin is sensed as being at logic  $1_B$  after reset. In case no external EEPROM is connected, it is required that this pin be pulled to ground, and thus sensed internally as being at  $0_B$  after reset.

#### Attention: The SDA pin must not be left floating!

In case an EEPROM has been detected, the soft pin-strapping pins are used to properly configure the EEPROM. This includes information about speed, address mode, and slave device address. Refer to **Chapter 3.4.1** for more information.

If the GPY111 evaluates the SDA pin and detects an EEPROM device, it tries to access the EEPROM device by initiating a single byte read. If the device is present and understands the I<sup>2</sup>C format, it will acknowledge the read instruction after a certain amount of time. The GPY111 waits for this acknowledgment, and if none is received



before a time-out, the attempt to access the EEPROM is aborted and no compatible device is assumed to be connected to the I<sup>2</sup>C interface.

However, if the acknowledgment is successfully received, the GPY111 starts scanning the EEPROM content for a specific signature at the beginning of the Configuration Signature Record (CSR). The setup of the CSR is specified in **Table 21**. The signature is a sequence of predefined bytes:  $EE_H$ ,  $CO_H$ ,  $DE_H$ ,  $1F_H$ . The GPY111 scans the entire EEPROM at address locations of k \* STEP within the range of the predefined EEPROM size (see SIZE[3:0] in **Chapter 3.4.1**, **Table 18**). The STEP size is equal to SIZE / 64, so that for a 1 kb EEPROM the STEP size is STEP = 8 bytes. If no signature is found, the GPY111 aborts the search and skips any further EEPROM read operations. If a signature is detected, the GPY111 reads the CSR. Note that the CSR contains the PHYADR that is used for MDIO communication (see **Chapter 3.4.3.1**). The MDIO address is used only after the CSR has been successfully read by the GPY111. Before this, the MDIO address is by default at logic  $00000_B$ .

#### 3.4.2.3 EEPROM Content

Table 21 depicts the Configuration Signature Record (CSR), containing the signature as well as several addresses. The signature is used to identify a part of the EEPROM content to be dedicated to the GPY111, in case several different devices share the same memory. The subsequent byte contains the CRID that is dedicated to a single GPY111 in case multiple GPY111 devices retrieve configuration data from the same EEPROM. The subsequent fields are only evaluated if the CSR and the configuration record ID match. The CRID must match the value specified by the pin-strapping configuration (see also Chapter 3.4.1). The first address contained in the CSR is the PHYADR used to address the MDIO messages to the correct device, in case the MDIO is shared. More details can be found in Chapter 3.4.3.1. If no CSR is found during the scan process, the MDIO address is set internally to PHYADR[4:3] = 00<sub>B</sub>, PHYADR[2:0] = CRID[2:0]. The subsequent field contains the Configuration Content Record (CCR) base address (CCR\_ADR), which is a 16-bit pointer address pointing to the start address location of the CCR on the same EEPROM, as defined in Table 22. In case no CCR exists, the CCR\_ADR must be set to FFFF<sub>H</sub>. The 2 bytes following the CCR\_ADR field are reserved for internal use and must be set to FFFF<sub>H</sub>.

Table 21 Configuration Signature Record (CSR)

Address <sup>1)</sup>				Con	tent			1	Comment
	7	6	5	4	3	2	1	04	
k * STEP + 0	1	1	1	0	1	1	1	0	Configuration Record Signature:
k * STEP + 1	1	1	0	0	0	0	0	0	EE <sub>H</sub> ,C0 <sub>H</sub> ,DE <sub>H</sub> ,1F <sub>H</sub>
k * STEP + 2	1	1	0	1	1	1	1	0	On S
k * STEP + 3	0	0	0	1	1	1	1	1	TO CONTRACT OF THE PROPERTY OF
k * STEP + 4	0	0	0	0	0	CRID	[2:0]		Configuration record ID
k * STEP + 5	0	0	0	PHYA	DR[4:	:0]			PHY MDIO address
k * STEP + 6	CCR	_ADR[	15:8]						Configuration Content Record (CCR)
k*STEP+7	CCR_	_ADR[7	7:0]						base address. This vector must be set to CCR_ADR = FFFF <sub>H</sub> if no CCR exists.
k * STEP + 8	1	1	1	1	1	1	1	1	Reserved for future use.
k * STEP + 9	1	1	1	1	1	1	1	1	Reserved for future use.

<sup>1)</sup> This is the byte-wise EEPROM address. The scheme is independent of the address mode used (11/16)



**Table 22 Configuration Content Record** 

Address <sup>1)</sup>				Co	onten	t	Comment						
	7	6	5	4	3	2	1	0					
CCR_ADR + 0	NO	CE[7:0	]			·	Number of configuration entries. A value of 00 <sub>H</sub> corresponds to 1 entry. A value of FF <sub>H</sub> corresponds to 256 entries.						
CCR_ADR + 1	ADI	DR(1)[7	7:0]						Address (MDIO address) and				
CCR_ADR + 2	DA	TA(1)[1	5:8]						configuration data word (MDIO data) for				
CCR_ADR + 3	DA	TA(1)[7	':0]						entry 1				
CCR_ADR + 4	ADI	DR(2)[	7:0]				Address (MDIO address) and						
CCR_ADR + 5	DA	TA(2)[1	5:8]						configuration data word (MDIO data) for				
CCR_ADR + 6	DA	TA(2)[7	':0 <u>]</u>						entry 2				
CCR_ADR +		0	1	4									
CCR_ADR + 3 * NOCE + 1	ADI	DR(NC	CE)[7:	0]	6.				Address (MDIO address) and configuration data word (MDIO data) for				
CCR_ADR + 3 * NOCE + 2	DA	TA(NO	CE)[15	:8]		2000			entry #NOCE				
CCR_ADR + 3 * NOCE + 3	DA	TA(NO	CE)[7:0	0]	7/1	20,	Cx						

<sup>1)</sup> This is the byte-wise EEPROM address. The scheme is independent of the address mode used (11/16)

#### 3.4.2.4 EEPROM Frame Formats

This chapter specifies the EEPROM frame formats supported. In particular, a subset of the  $I^2C$  protocol is represented which is supported by most of the EEPROM devices on the market. In order to comply with almost all EEPROM devices currently available on the market, and in particular with larger sizes, two addressing modes are supported: 11-bit addressing and 16-bit addressing. Note that this addressing relates to the EEPROM internal data addressing and not to the  $I^2C$  device address mode. For the latter, the GPY111 only supports the standard 7-bit device address mode. In compliance with most of the available EEPROM devices, the default value of the device address is DADR[7:1] =  $IOIOXXX_B$ . The last three bits are configurable using the soft pin-strappings (see Chapter 3.4.1), which also contain a configuration bit for the addressing mode. The following sections specify the frame formats for both addressing modes. Mixed addressing mode operation is not supported by the GPY111.

#### 3.4.2.4.1 Frame Formats in 11-Bit Addressing Mode

This addressing mode is used for the smallest available EEPROM devices. These devices are usually available in sizes ranging from 1 kb to 16 kb. Since the EEPROM devices are organized in 8-bit words, this requires between 7 and 11 address bits. However, only one address byte is defined following the I<sup>2</sup>C instruction. Therefore, for larger EEPROM configurations, it is common practice to use up to 3 LSBs of the device address within the I<sup>2</sup>C instruction to map these missing 3 bits. This is also illustrated in the frame structures specified in this chapter. In order to clarify this further, **Table 23** lists the address mappings for all supported EEPROM sizes.



EEPROM Size	I <sup>2</sup> C	Instru	ction I	Bit				Memory Content Address Byte									
	7	6	5	4	3	2	1	7	6	5	4	3	2	1	0		
1 kb	1	0	1	0	DAD	R[2:0]		0 ADR[6:0]									
2 kb					DAD	R[2:0]			ADR[7:0]								
4 kb					DAD	R[2:1]		ADR[8:0]									
8 kb					[2] <sup>1)</sup>			ADR[9:0]									
16 kb									ADR[10:0]								

Table 23 Address Bit Mapping in 11-Bit Addressing Mode

Figure 12 shows the 3-byte frame format for a single-byte write operation to a random address on the EEPROM. For maximum compatibility, this is the only write frame format supported. Following a start bit (a falling edge on SDA while SCL is active high), the  $I^2$ C instruction is sent, containing the default device address DADR[7:1] =  $1010XXX_B$  that is applicable to almost all EEPROM devices available. The last bit in the instruction is a read/write bit which is set to low to indicate a write transaction.

The instruction byte is followed by an acknowledgment driven by the EEPROM. Following this acknowledgment, the GPY111 drives the memory address byte ADR[7:0], which also needs to be acknowledged by the EEPROM.

The last of the three bytes in the write operation frame contains the data byte to be written, DATA[7:0]. After a successful write operation, this byte is acknowledged by the EEPROM and the GPY111 ends the write operation frame with a stop bit.

In accordance with I<sup>2</sup>C, this stop bit is a rising edge on SDA while SCL is active high.

**Table 23** showed how some devices exceed the address byte and therefore have to use parts of the device address. This is indicated in **Figure 12** by showing the assignment of the ADR[10:8] bits.

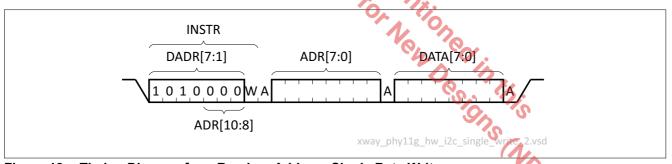


Figure 12 Timing Diagram for a Random Address Single Byte Write

**Figure 13** shows a read frame similar to the write frame operation illustrated in **Figure 12**. In general, a read frame starts with a dummy write frame which lasts up to the write address. This is required to set the current address on the EEPROM. After acknowledgment of the address byte ADR[7:0], the GPY111 terminates the current dummy write by setting a new start bit. The instruction byte is repeated, except that the read/write bit is now set to active high to indicate that this instruction corresponds to a read access. Following acknowledgment of the read request, the EEPROM drives the desired read data byte DATA[7:0]. For a single read operation, the GPY111 does not acknowledge this byte, indicating that no further read is required. The read access is completed by the GPY111 driving the stop bit to SDA.

<sup>1)</sup> DADR[2]



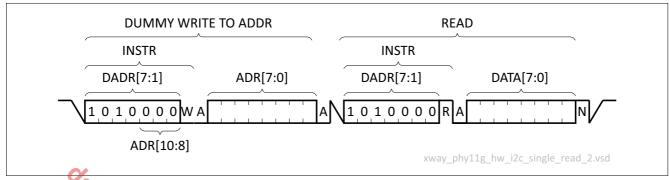


Figure 13 Timing Diagram for a Random Address Single Byte Read

A single-byte random read as depicted in **Figure 13** can easily be extended to a burst read. **Figure 14** shows the supported burst read frame structure. Note that the initialization of a burst-read access is the same as for a single-byte read. Therefore, the figure only shows the protocol sequence starting from the read instruction. Subsequent bytes are read from incrementing address locations, for as long as the GPY111 keeps acknowledging the read bytes driven by the EEPROM. The burst read access stops when the GPY111 does not acknowledge a read byte and instead issues the stop bit. The GPY111 uses the burst read operation only for the external firmware load feature. Normal configuration EEPROM-access operations are done using single-byte read/write operations.

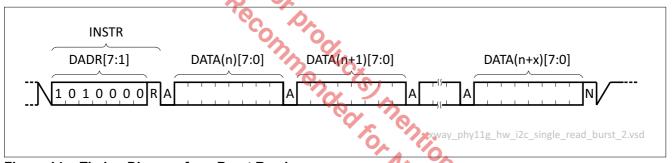


Figure 14 Timing Diagram for a Burst Read

## 3.4.2.4.2 Frame Formats in 16-Bit Addressing Mode

This addressing mode is used for the larger available EEPROM devices. These devices are usually available in sizes ranging from 32 kb up to 512 kb. Since the EEPROM devices are organized in 8-bit words, this requires 12 to 16 address bits. The larger storage space can be used for customized firmware code or for sharing among several devices by using I<sup>2</sup>C functionality. In contrast to the 11-bit addressing mode, the 16-bit addressing mode uses two bytes following the I<sup>2</sup>C instruction to encode the memory address. The three LSBs of the device address are available for selecting one out of eight EEPROM devices attached to the same I<sup>2</sup>C serial bus. This device address is configurable using the soft pin-strappings as described in **Chapter 3.4.1**. In order to clarify this further, **Table 24** lists the address mappings for all supported EEPROM sizes.



<b>EEPROM Size</b>	I <sup>2</sup> C Instruction Bit								1 <sup>st</sup> Memory Content Address								2 <sup>nd</sup> Memory Content Address										
									Byte								te										
	7	6	5	4	3	2	1	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0				
32 kb	1	0	1	0	Х	Х	Х	0 0 0 0 ADR[11:0]													•						
64 kb					Χ	Х	Х								ADR[12:0]												
128 kb					Χ	Х	Х								ADR	ADR[13:0]											
256 kb					Χ	Х	Х	0	0 ADR[									R[14:0]									
512 kb					Χ	Х	Х		ADR[15:0]																		

Table 24 Address Bit Mapping in 16-Bit Addressing Mode

**Figure 15** shows the 4-byte frame format for a single-byte write operation to a random address on the EEPROM. For maximum compatibility, this is the only write frame format supported. Following a start bit (a falling edge on SDA while SCL is active high), the  $I^2$ C instruction is sent, containing the default device address DADR[7:1] = 1010XXX<sub>B</sub> that is applicable to almost all EEPROM devices available.

The last bit in the instruction is a read/write bit which is set to low to indicate a write transaction.

The instruction byte is followed by an acknowledgment driven by the EEPROM. Following this acknowledgment, the GPY111 drives the memory address bytes ADR[15:8] and ADR[7:0], both of which are also separately acknowledged by the EEPROM.

The last of the four bytes in the write operation frame contains the data byte to be written, DATA[7:0]. After a successful write operation, this byte is acknowledged by the EEPROM, and the GPY111 ends the write frame with a stop bit (a rising edge on SDA while SCL is active high).

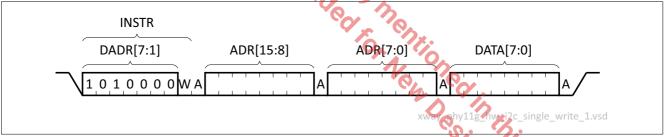


Figure 15 Timing Diagram for a Random Address Single Byte Write

**Figure 16** shows a read frame similar to the write frame protocol illustrated in **Figure 15**. In general a read frame starts with a dummy write frame which lasts up to the write address. This is required to set the current address on the EEPROM. After acknowledgment of the address byte ADR[7:0], the GPY111 terminates the current dummy write by setting a new start bit. The instruction byte is repeated, except that the read/write bit is now set to active high to indicate that this instruction corresponds to a read access. Following acknowledgment of the read request, the EEPROM drives the desired read data byte DATA[7:0]. For a single read operation, the GPY111 does not acknowledge this byte, indicating that no further read is required. The read access is completed by the GPY111 driving the stop bit to SDA.



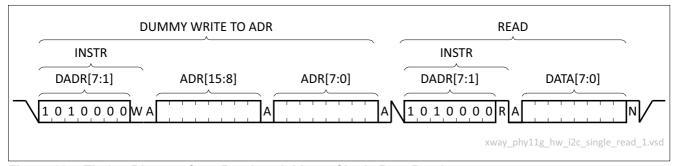


Figure 16 Timing Diagram for a Random Address Single Byte Read

A single-byte random read as depicted in **Figure 16** can easily be extended to a burst read. **Figure 17** shows the supported burst read frame structure. Note that the initialization of a burst-read access is the same as for a single-byte read. Therefore, the figure only shows the protocol sequence starting from the read instruction. Subsequent bytes are read from incrementing address locations, for as long as the GPY111 keeps acknowledging the read bytes driven by the EEPROM. The burst read access stops when the GPY111 does not acknowledge a read byte and instead issues the stop bit. The GPY111 uses the burst read operation only for the external firmware load feature. Normal configuration EEPROM-access operations are done using single-byte read/write operations.

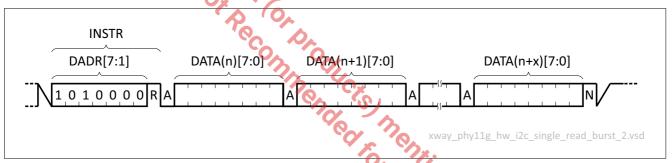


Figure 17 Timing Diagram for a Burst Read


#### 3.4.2.4.3 EEPROM Access via MDIO

The GPY111 supports indirect access to the EEPROM via the MDIO interface. A special type of handshaking between the higher-level management entity and PHY is required for proper cycle-time arbitration. The flow charts in **Figure 18** and **Figure 19** illustrate this handshake mechanism for a write and a read cycle respectively. Note that only single-byte accesses are supported, as opposed to EEPROM burst-mode options, for better compatibility and simplicity. As can be seen from the flow charts, the first action before any operation is to check whether the EEPROM is busy or ready to use. This is done using the PHY.EECTRL.EXEC bit. This bit could still be set from a past write cycle or other internal means, preventing a current EEPROM access. Any access to the EEPROM is performed via MMD on device 1E<sub>H</sub>. The entire EEPROM is mapped onto this indirect MDIO addressable space (see also **Chapter 3.4.3.2**).

A write cycle is simply executed by setting address and write data in conjunction with the control bits. Once this is done, the GPY111 takes care of storing the byte into the EEPROM. A read cycle is similar, but after issuing a read access the higher-level management entity needs to wait until the data is read from the EEPROM. This is done by observing the PHY.EECTRL.EXEC (PHY\_EECTRL) bit. After this, the read byte can be loaded from STD.MMDDATA (STD\_MMDDATA).

Note that it would make sense to check on the availability of an external EEPROM using the PHY. EECTRL. EEDET bit. This is set to active when an external EEPROM has been detected by the GPY111.



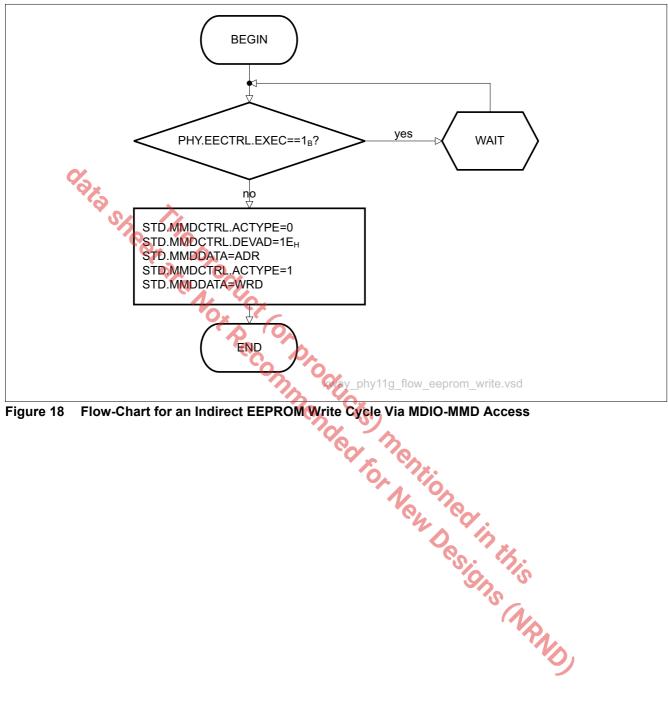

Flow-Chart for an Indirect EEPROM Write Cycle Via MDIO-MMD Access Figure 18



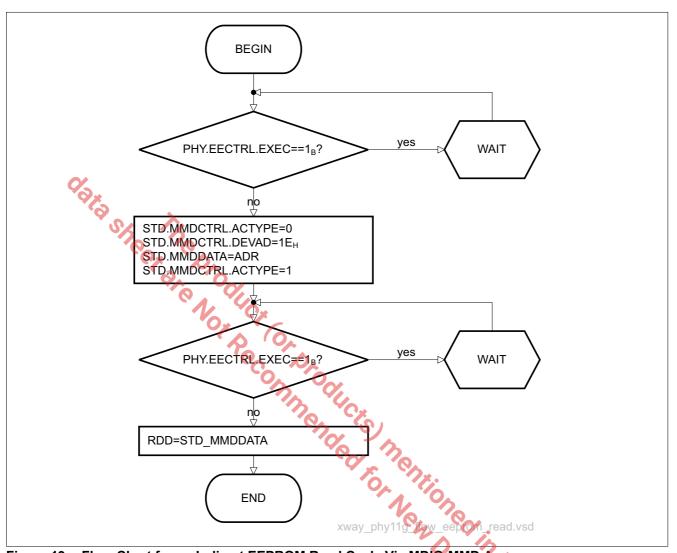


Figure 19 Flow-Chart for an Indirect EEPROM Read Cycle Via MDIO-MMD Access



### 3.4.3 Configuration and Control Via MDIO

If a higher-level management entity exists in the system, this can configure and control the GPY111 completely by means of the MDIO interface, according to IEEE 802.3 [1].

#### 3.4.3.1 MDIO Interface

The GPY111 supports an MDIO interface according to IEEE 802.3 [1], giving a higher-level management entity control over internal functions. This control is provided by means of MDIO registers. The GPY111 provides the set of IEEE standard registers according to [1]. Additionally, extended register pages are supported. All registers are described in **Chapter 4**.

The MDIO interface is a serial interface using only 2 pins, which are named MDC and MDIO. See **Chapter 2.2.5** for more information. The clock pin (MDC) is always driven by the higher-level management entity. The bi-directional signal (MDIO) carries the control information and is driven by both the higher-level management entity and the PHY, depending on whether a write or a read operation is being executed.

The MDIO communication between the higher-level management entity and PHY is organized in frames that are defined by IEEE 802.3 [1]. Figure 20 and Figure 21 illustrate the write and read frames respectively.

Chapter 6.6.5 defines the AC characteristics of this interface.

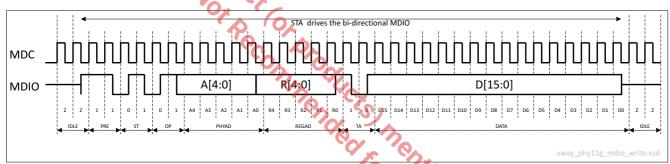


Figure 20 MDIO Write Frame

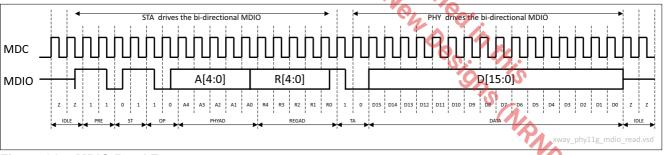


Figure 21 MDIO Read Frame

Note that the read operation requires the PHY to return the read data to the higher-level management entity. This implies that the driver of the MDIO signal is changed from being the higher-level management entity to being the PHY. In order to take this driving condition transition into account, a turn-around time is defined. The only period of time over which the PHY drives the MDIO signal is when returning the 16-bit read data value to the higher-level management entity.

Both frames consist of several fields which are explained in more detail in Table 25.



Table 25 Definition of MDIO Frame Components

Field	Field Long Name	Definition			
IDLE	Idle Time	This state is entered by both the higher-level management entity and PHY when no transaction happens. In this state, all tristate drivers are inactive. The internal pull-up resistor of the MDIO pin on the GPY111 pulls the MDIO signal to logic one.			
PRE	Preamble	The preamble is defined as a sequence of logic ones. Since this field of the frame is optional, the GPY111 does not require a preamble to be inserted. If inserted it can be of arbitrary length.			
ST	Start of Frame	The ST field is required to determine a new frame start by means of a two-bit logic <01 <sub>B</sub> > pattern.			
OP	Operation Code	The operation code field indicates a read or write operation to the PHY by means of a two-bit logic <10 <sub>B</sub> > or <01 <sub>B</sub> > pattern respectively.			
PHYAD	Physical Layer Address	The physical layer address field is used by the higher-level management entity to select one out of a maximum of 32 PHY devices. Each PHY needs to have a priori knowledge about its address. <b>Chapter 3.4.1</b> describes how this address can be configured to an GPY111 device.			
REGAD	Register Address	This field represents a vector of five bits which define the register address for one out of 32 registers in the MDIO address space. In the GPY111, this address space covers the standard IEEE 802.3 [1] registers plus extended and custom registers. Chapter 4 describes all register configurations.			
TA	Turnaround	The turnaround is a two-bit time field that separates the DATA field from the others to avoid contention during read operations. During read transactions, the time duration of the first bit is used to ensure that both the higher-level management entity and the PHY disable their tristate drivers and that MDIO is in high impedance. The time duration of the second bit is used by the GPY111 to drive a logic zero.			
DATA	Read/Write Data	The data field is 16 bits wide. The MSB is sent first and the LSB is sent las in both read and write transactions.			

Attention: Consecutive MDIO accesses, especially if automated, are required to be spaced out in time to ensure that proper operation is maintained. It is recommended that the maximum rate of MDIO does not exceed 100 kHz.

### 3.4.3.2 MDIO Address Space

Configuration and control operations, as well as extraction of status information, can be handled via the MDIO interface. This interface allows for registers located in the MDIO address space to be read from and written to. The MDIO interface can only address up to 32 addresses. The first 16 addresses (from  $00_H$  to  $0F_H$ ) are mostly defined by the IEEE 802.3 standard [1], and cannot be used for device-specific configuration. Only the last 16 addresses (from  $10_H$  to  $1F_H$ ) are to be used. Since a range of 16 addresses is not sufficient to manage the GPY111, an indirect addressing scheme is used.

This scheme is depicted in **Figure 22**, which shows the layout of the MDIO address space looking from the higher-level management entity via the MDIO interface towards the PHY. As shown in the figure, the direct address region from  $00_H$  to  $0F_H$  holds all IEEE 802.3 standard [1] registers. The address range from  $10_H$  to  $1F_H$  spans an address range for PHY-specific registers that can be accessed directly via MDIO as well. The GPY111 address space is extended by means of an indirect memory access based on MMD registers. Note that this method is defined in



the IEEE 802.3 standard [1], in clause 22 and Annex 22D. It is used to access EEE registers as well as provide seamless access to a potentially externally-connected EEPROM and to all GPY111 internal registers. Note that access to internal registers is prohibited, except for the special addresses defined in **Chapter 5**.

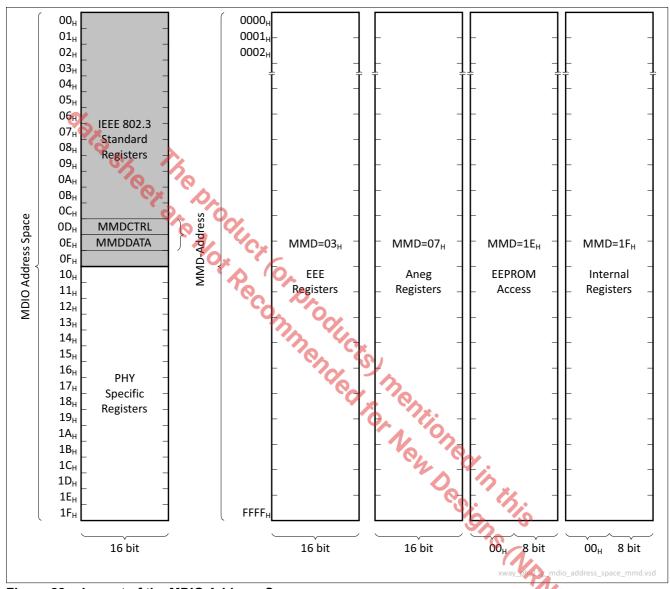


Figure 22 Layout of the MDIO Address Space

In order to simplify the software design, the most frequently used status and control registers are placed directly in the MDIO address range using the PHY-specific registers. Part of the functionality, for example EEE, is located in the MMD address range by standard definition. Some PHY-specific registers are located in the user-defined MMD addresses 1E<sub>H</sub> and 1F<sub>H</sub>. An overview of all pages is listed in **Table 26**.



Table 26 MDIO Indirect MMD Device Address Overview

MMD	MMD Name	Description		
00 <sub>H</sub> -02 <sub>H</sub>	Unused			
03 <sub>H</sub>	EEE	Contains some standard registers required for EEE operation		
04 <sub>H</sub> -06 <sub>H</sub>	Unused			
07 <sub>H</sub>	ANEG	Contains some standard registers required for EEE auto-negotiation operation		
04 <sub>H</sub> -06 <sub>H</sub>	Unused			
1E <sub>H</sub>	EEPROM	Allows seamless indirect access to externally connected (if present) EEPROM		
1F <sub>H</sub>	Internal	Allows seamless indirect access to PHY internal registers		

#### 3.4.3.3 MDIO Interrupt

The GPY111 allows for an interrupt to be driven to the management device. This interrupt is named MDINT, and can be used by the management device to get notification of pre-configured events. These events can be configured in the MDIO register MDIO PHY.IMASK (PHY\_IMASK), which allows for a mask to be set onto the event vector that can cause the MDIO interrupt to be asserted. The actual interrupt status is reported in the MDIO register MDIO.PHY.ISTAT). Note that, without any active mask bit in MDIO.PHY.IMASK (PHY\_IMASK), the PHY will issue an interrupt after reset when it is ready to receive MDIO transfers.

Since there are many types of management devices, the interrupt polarity is not standardized. In order to be flexible and inter-operable with all types of management device IC, the MDINT pin of the GPY111 is in tristate when inactive. The active level of the MDINT pin can be customized by means of an external pull-up or pull-down resistor. If the MDINT polarity is active high, an external pull-down resistor must be connected to ground. Otherwise, if the MDINT polarity is active low, an external pull-up resistor must be connected to VDDP. After reset of the GPY111, the MDINT is tristated by default. During this time period, the GPY111 detects the target polarity of the MDINT by reading out the pull-up/down resistor. The external circuitry for the MDINT pin in an active-high and active-low state is depicted in Figure 23 and Figure 24 respectively.

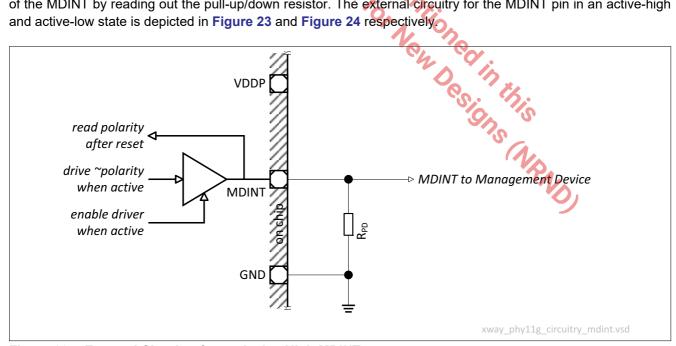


Figure 23 External Circuitry for an Active-High MDINT



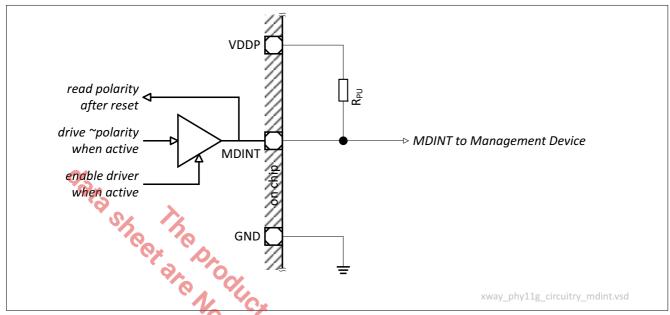


Figure 24 External Circuitry for an Active-Low MDINT

#### 3.4.4 LED Interface

The GPY111 supports up to three LED outputs. These outputs are active high and drive LEDs directly with  $V_{DDP}$  = 2.5 V...3.3 V (see **Chapter 6.2**). It is possible to connect one single-color LED per interface pin, as well as bi-color LEDs. The latter is achieved by combining two LED interface pins. Both modes of operation are introduced in **Chapter 3.4.4.1** and **Chapter 3.4.4.2** respectively. The behavior and event-sensitivity of each LED can be configured individually, as described in **Chapter 3.4.4.3**. The individual MDIO registers referred to in **Chapter 3.4.4.3** are described in more detail in **Chapter 4**.

#### 3.4.4.1 Single Color LED Mode

The external circuitry for a single-color LED is depicted in **Figure 25**. The LEDx pin represents one of the available LED interface pins at the device. The GND signal represents the common ground EPAD. The LED pins are designed to source a certain amount of current out of the pad-supply  $V_{DDP}$  when becoming active high. Besides the LED, two individual resistors are depicted in the figure.  $R_{LED}$  denotes an optional series resistor which could be used depending on the selected LED type and PAD supply voltage  $V_{DDP}$ .  $R_{CFGx}$  and  $C_{CFGx}$  denote external passive components required for the soft pin-strapping configuration of the device. The component values are selected such that the brightness of the LED is not affected. More details on this type of pin-strapping configuration can be found in **Chapter 3.4.1**.



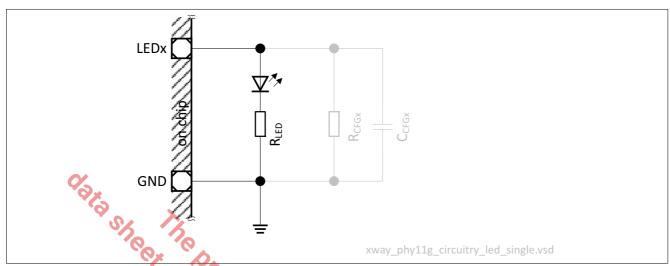


Figure 25 Single Color LED External Circuitry

### 3.4.4.2 Bi-Color LED Mode

The external circuitry for a bi-color LED is depicted in **Figure 26**. The LEDx and LEDy pins represent any two of the available LED interface pins at the device. The GND signal represents the common ground EPAD. The LEDx and LEDy pins are designed to source a certain amount of current out of the pad-supply V<sub>DDP</sub> when becoming active high. Besides the LEDs<sup>1</sup>), three individual resistors are depicted in the figure. R<sub>LED</sub> denotes an optional series resistor which might be used, depending on the selected LED type and PAD supply voltage V<sub>DDP</sub>. R<sub>CFGx</sub>/R<sub>CFGy</sub> and C<sub>CFGy</sub>/C<sub>CFGy</sub> denote external passive components required for the soft pin-strapping configuration of the device. The component values are selected such that the brightness of the LED is not affected. More details on this type of pin-strapping configuration can be found in **Chapter 3.4.1**.

<sup>1)</sup> Bi-color LEDs are also available as monolithic 2-pin devices as indicated in Figure 26.



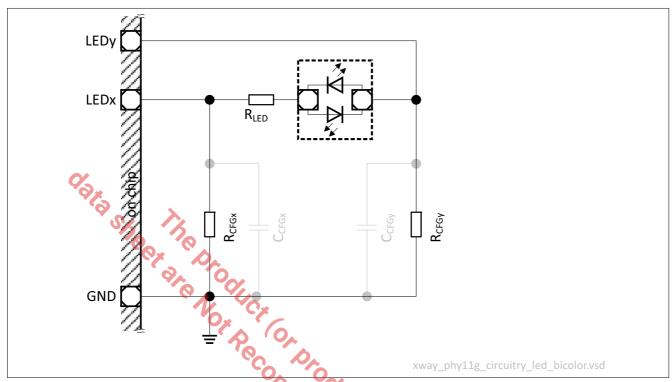


Figure 26 Bi-Color LED External Circuitry

#### 3.4.4.3 LED Operations

Irrespective of the LED type used (single-color or bi-color), the LED pins can be operated in various modes. Basically, two major modes can be distinguished: Internally Controlled Mode (ICM) and Externally Controlled Mode (ECM). In ECM, the higher-level management entity is able to control the LEDs via register access in the MDIO register space. In ICM, the GPY111 itself controls the functions of the LEDs. These functions are introduced in **Chapter 3.4.4.3.2**, and can be configured by the higher-level management entity via MDIO configuration registers as described in **Chapter 3.4.4.3.3**. The configuration scheme is defined such that combined and direct-drive LED functionality can be set up.

#### 3.4.4.3.1 LED Externally Controlled Mode (ECM)

In ECM, the LEDs can be directly driven by register bits mapped onto the MDIO address space. The higher-level management entity is able to directly change the LED outputs. This feature enables the higher-level management entity to control the LED pins itself, and the GPY111 only acts as the LED driver. This mode also acts as a simple testing feature for the LEDs. Note that ECM is not enabled by default, and needs to be enabled in advance. To enable the ECM, the higher-level management entity needs to set the register MDIO.PHY.LED.LED[2:0]EN =  $0_B$ .

The LED can be illuminated by setting MDIO.PHY.LED.LED[2:0]  $DA = 1_B$ .

#### 3.4.4.3.2 LED Functions in Internally Controlled Mode (ICM)

LED functions are activities to be applied to the LED pins according to a given configuration. These activities are applied in a given priority. It is possible to map multiple activities to the same LED pin, in order to be able to multiplex different types information. The configuration of these LED functions is described in **Chapter 3.4.4.3.3**. There are two types of LED function: direct and complex LED functions. Direct LED functions can be applied to a single LED, whereas complex LED functions use the context of all LEDs. **Table 27** lists all the supported LED functions and their associated priorities when compared with each other. **Table 28** lists all the supported



complex LED functions and their priorities when compared to each other. The complex LED functions have a higher priority than that of the direct LED functions.

Table 27 Direct LED Functions

		· · · · · · · · · · · · · · · · · · ·
Function	Priority	Description
PULSE	1 (high)	The LED is switched on/off shortly in reaction to a certain event or state transition. The corresponding ON and OFF time is determined by the pulse-stretching <sup>1)</sup> configuration. Note that each new event will cause an ON-OFF sequence unless if this event happens during a running PULSE function. The ON-OFF sequence is necessary to make the PULSE function visible on LEDs which already indicate another function, e.g. ON or BLINK slow. The length of the pulse stretching depends on the global setting used for the fast-blinking frequency.
BLINKF	2	LED blinks with a globally configured fast frequency.
BLINKS	<b>C</b> 3:	LED blinks with a globally configured slow frequency.
CON	40	LED is constantly ON; can be configured to indicate link speed, EEE mode, ANEG, analog self-test / cable diagnostics, or the currently active interface (copper, fiber or other)
NONE	5 (low)	No direct function is applied to the LED; the LED is OFF (might be over-ruled by a concurrently running complex function).

<sup>1)</sup> Pulse-stretching is used to make short events visible by extending the lighting time of the LED following this event.

Table 28 Complex LED Functions

Function	Priority	Description
CBLINK	1 (high)	All LEDs blink simultaneously with the globally configured fast frequency. In particular, in order to distinguish this mode properly from concurrently running direct functions, all even-numbered LEDs have their blinking phase shifted by 180° with respect to the odd-numbered LEDs.
SCAN	2	Scan sequence; this is a walking light running fast between LED0 to LED2 backwards and forwards. The speed is selected for the fast-blink frequency.
NACS	3	Reversed scan sequence; similar to the SCAN function but all LED outputs are inverted.
NONE	4 (low)	No complex function is applied to the LEDs.

The speed or frequency of any of the BLINK or SCAN/ISCAN LED functions can be selected by means of a global setting in the MMD.INTERNAL.LEDCH.FBF register (fast-blinking frequency) as well as in the MMD.INTERNAL.LEDCH.SBF register (slow-blinking frequency). Refer to LED Configuration for more information.

#### 3.4.4.3.3 LED Configuration in ICM

The configuration of LEDs for ICM can be managed with the LED configuration registers. Apart from the complex function registers MMD.INTERNAL.LEDCH and MMD.INTERNAL.LEDCL, there is one such register for each LED port: registers MMD.INTERNAL.LED0H / MMD.INTERNAL.LED0L through MMD.INTERNAL.LED2H / MMD.INTERNAL.LED2L. The layout of this type of configuration register is defined in Chapter 4. Each supported direct function owns a field in these LED-specific configuration registers. The setup of the direct functions is independent for each LED. The fields of the MMD.INTERNAL.LEDXX register allow several states/events of the GPY111 to be mapped to the supported direct functions. If a direct function is not desired, a NONE must be



mapped. Note that multiple events/states can occur simultaneously. The direct functions apply according to the priority as specified in Table 27. Also note that a direct function always has a lower priority than any supported complex function.

As an example the following mapping can be configured for LED0, LED1 and LED2:

- LED0:
  - PULSE = NONE
  - BLINKS = LINK10
  - BLINKF = LINK100
  - CON = LINK1000
- LED1
- LED2

ED1
- PULSE = AC
- BLINKS = NONE
- BLINKF = NONE
- CON = NONE
| ED2
" SE = COL
NONE
speed In this example, the LED0 indicates the speed of the PHY, whereas LED1 indicates the transmit and receive activity. LED2 reflects any collision in case of half-duplex mode settings.

ACS) is a LINK, SCAN, If any supported complex function (CBLINK, SCAN, NACS) is desired in cable diagnostics mode, this can be set up using the registers MMD.INTERNAL.LEDCL. {CBLINK, SCAN} and MMD.INTERNAL.LEDCH. {NACS}.



#### 3.5 Power Management

This chapter introduces the power management and power supply functions of the GPY111.

#### 3.5.1 Power Supply

Because of its integrated DC/DC switching regulator, the GPY111 can be powered using a single power supply, as described in **Chapter 3.5.1.1**. However, the device can also be powered without the integrated DC/DC switching regulator, as described in **Chapter 3.5.1.2**.

If the integrated DC/DC switching regulator is used, then a clock signal is required at XTAL1 during both normal mode and boundary scan mode.

### 3.5.1.1 Power Supply Using Integrated Switching Regulator

By using the integrated DC/DC switching regulator, the GPY111 can be powered using a single power supply. This power supply can range from 2.5 V to 3.3 V. As long as the applied nominal voltage remains in this range, the device operates automatically and without the need for additional settings to be applied. Only minor external circuitry is required to enable this feature. An example schematic is shown in **Figure 27**. The electrical characteristics of the power supply are defined in **Chapter 6.2**.

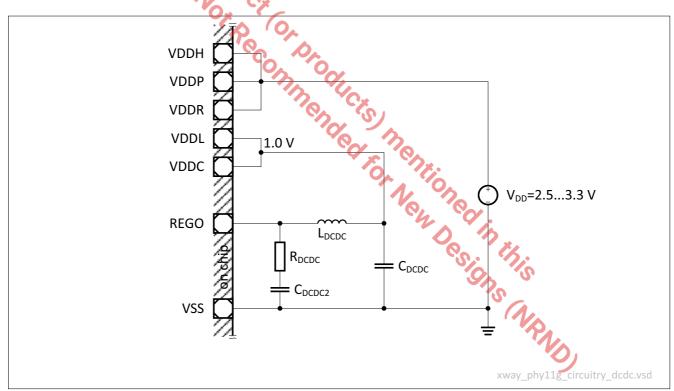


Figure 27 External Circuitry using the Integrated Switching Regulator

The required values for external components are listed in Table 29.



Table 29 Switching Regulator External Component Values

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Тур.	Max.		
DC/DC buck inductance	L <sub>DCDC</sub>		4.7		μH	I <sub>max</sub> = 450 mA
DC/DC smoothing capacitance	C <sub>DCDC</sub>		22.0		μF	
DC/DC spike filter resistance	R <sub>DCDC</sub>		5.0		Ω	
DC/DC spike filter capacitance	C <sub>DCDC2</sub>		333.0		pF	

# 3.5.1.2 Power Supply Without Using Integrated Switching Regulator

When the integrated DC/DC switching regulator is not used, for example when both power supply voltages are already available in the system, the GPY111 can be powered by a dual power supply, as shown in **Figure 28**. The electrical characteristics of the power supply are defined in **Chapter 6.2**.

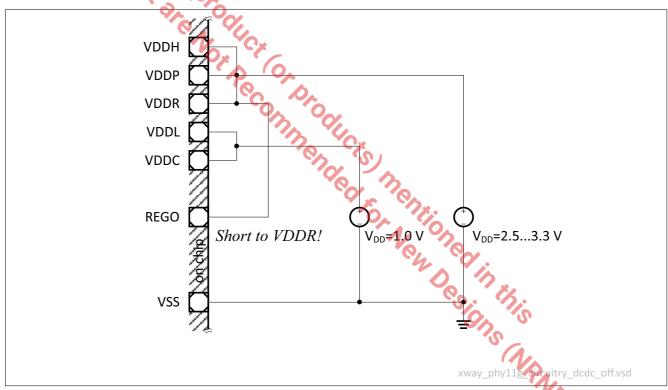


Figure 28 External Circuitry without using the Integrated Switching Regulator

In external supply mode, the integrated DC/DC is internally switched off, as the GPY111 automatically detects whenever the switching regulator output pin is shorted to VDDR. In this case, neither additional pin-strappings nor register settings are required. Note that **Figure 28** is only a generic schematic, and does not show power supply blocking for reasons of simplicity.



#### 3.5.2 Power Over Ethernet (PoE)

Power Over Ethernet (PoE) is a standardized method (described in IEEE 802.3af, and in particular in IEEE 802.3, clause 33 [1]) for remotely powering devices via the MDI. The remotely powered device does not require a power supply, thereby mainly saving on installation costs, since only the Ethernet connection (CAT5 cable or better) needs to be equipped. One example of such an application is for Wi-Fi routers or NAS devices. According to the standard, such devices can be remotely powered if they consume less than 15.4 W. As there is a strong demand for higher-power applications, an enhancement of the PoE standard is being developed (IEEE 802.3at, [3]) that is able to provide up to 50 W via remote powering. The increase in power level is practically the only difference between the two standard versions.

The IEEE 802.3af standard defines two kinds of devices, the Powered Device (PD) and the Power-Sourcing Equipment (PSE). The former extracts electrical power from the common mode of some of the twisted pairs inside the CAT5 (or better) cable, whereas the latter acts as a source of electrical power. The two types of devices and their application together with the GPY111 are illustrated in **Chapter 3.5.2.1** and **Chapter 3.5.2.2**, respectively.

### 3.5.2.1 Powered Device (PD)

Additional external circuitry is required to extract power from the twisted pair. This includes a PD circuit and a DC/DC converter, together with various external components that are usually not integrated. The PD and DC/DC devices could be integrated on one IC.

According to IEEE 802.3, clause 33 [1], there are two alternative methods for supplying a PD. The first involves supplying power via the common mode of the pairs (1, 2) and (3, 6), whereas the second involves the pairs (4, 5) and (6, 7). The PD is required to accept power from both alternatives, but only one in parallel. The polarity of the power injection is not specified. Accordingly, each PD must have a diode-bridge rectifier to extract the power from both twisted-pair combinations alternatively but independent of the driver polarity.

In turn, the PD must signal to the PSE which type of power is required, as several power classes are defined. More details can be found in IEEE 802.3, clause 33. This signaling is done by means of a resistive value which is sensed by the PSE. Each PD IC provides a pin to which this classification resistor can be connected. After the initial classification, done by the PSE with low voltages to prevent damage of non PoE-compliant PDs, the PSE drives the required power to the line. The PD indicates the availability of power to the DC/DC converter by means of the Pgood (power good) signal. The DC/DC converter is required to transform the line voltage (>20 V) to the chip power supply voltages required by the system. Since the DC/DC can only start once the power is stable, the Pgood indication is usually a necessary requirement. Note that the DC/DC converter must implement soft-start functionality to prevent the start current from becoming exhaustively large. Once the DC/DC provides the nominal voltage to the system, the remotely powered devices (ICs) power up just as they would if a power source is applied in normal operating conditions.

The board voltage provided by the DC/DC of the PD is fed to the GPY111 to supply the 2.5 V/3.3 V voltage domain, and in particular VDDP, VDDH and VDDR. All these domains must be properly blocked with adequate capacitance and filtering techniques. The integrated DC/DC switching regulator (see also **Chapter 3.5.1.1**) of the GPY111 can in turn be used to supply the 1.0 V voltage domains, for example VDDL, VDDC and VDDL. Note that the integrated DC/DC switching regulator supports soft-starting such that PoE is enabled.

The power class advertised by the PD to the PSE depends largely on the power consumption of the whole system. The GPY111 itself must also be taken into account. Regardless of the current power consumption of the GPY111, it is recommended that a figure of 1 W is assigned to the PHY.

#### 3.5.2.2 Power Sourcing Equipment (PSE)

The generic PSE circuit is similar to that of the PD, except that the PSE must only inject the supply into one of the two twisted-pair alternatives: pairs (1, 2) and (3, 6) or (4, 5) and (6, 7). The PSE also does not require polarity invariance measures, since it defines the supply polarity. However, the PSE must be supplied properly to guarantee proper operation, regardless of which type of PD is connected. Otherwise, the PSE has to switch itself off if it detects a PD of too high a power class.



There are 2 types of PSE system: EndPoint and Mid-Span. The GPY111 can be used in either type of system.

Note that the PSE adds complexity to the design, because of the high-voltage supply of the PoE. Typically, 48 V are used to supply the remote PD. It is recommended to avoid cross-connecting any of the PSE signals with any of the GPY111 signals, unless these are galvanically de-coupled. This applies to the common-mode supply injection at the center taps of the transformers, which is only done on the line side of the transformer. Some PSE devices support an I<sup>2</sup>C interface for management interaction. This interface can only be connected to the GPY111 when using an opto-coupler.

#### 3.5.3 Energy-Efficient Ethernet

The IEEE 802.3az standard ([2]), describing Energy-Efficient Ethernet (EEE) operation, is also implemented in the . Since the method used for saving energy depends on the PHY speed, this section is divided into 3 subsections corresponding to the various speeds of 10BASE-Te, 100BASE-TX and 1000BASE-T. Except for 10BASE-Te, the general idea of EEE is to save power during periods of low link utilization. Instead of sending an active idle, the transmitters are switched off for a short period of time (20 ms). The link is kept active by means of a frequent refresh cycle initiated by the PHY itself during low power mode. This sequence is repeated until a wake request is generated by one of the link-partners MACs. An EEE-compliant MAC must grant the PHY a time budget of wake time before the first packet is transmitted. The basic principle is shown in Figure 29.

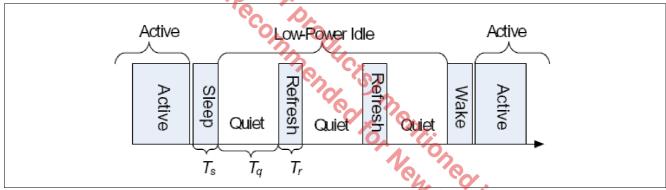


Figure 29 EEE Low-Power Idle Sequence

#### 3.5.3.1 EEE for 10BASE-Te

10BASE-Te is a fully inter-operable version of the legacy 10BASE-T. It is optimized for CAT5 and better cabling infrastructure. Since these cables have better insertion loss properties, the amplitude of 10BASE-T can be reduced, thus saving on energy.

Specifically, the 10BASE-Te transmission amplitude has been reduced to the range of 1.54 V...1.92 V, instead of 2.2 V...2.8 V for 10BASE-T. The 10BASE-Te mode can be activated using the MDIO.PHY.PHYCTL1.TXEEE10 bit. In order to maintain maximal inter-operability, the detects links with marginal characteristics and automatically switches back to the 10BASE-T mode. Thus, the legacy performance requirements are also supported, even though the transmitter is set up for 10BASE-Te.

#### 3.5.3.2 **EEE for 100BASE-TX**

During periods of low link utilization, an EEE-compliant MAC can assert Low Power Idle (LPI). It does so by asserting  $TX\_EN = 0_B$ ,  $TX\_ER = 1_B$  and  $TXD = 0001_B$  at the MII or an equivalent interface. The initiates LPI signaling and enters a low-power mode. Similarly, the senses LPI signaling on its receive side and switches off the receive path. Any wake attempt will cause the to return to the normal mode of operation in transmit or receive. Note that the indicates a receive LPI by asserting  $RX\_DV = 0_B$ ,  $RX\_ER = 1_B$  and  $RXD = 0001_B$  at the MII or equivalent interface. The wake-time for 100BASE-TX is of  $20.5~\mu s$ .



#### 3.5.3.3 EEE for 1000BASE-T

During periods of low link utilization, an EEE-compliant MAC can assert Low Power Idle (LPI). It does so by asserting TX\_EN =  $0_B$ , TX\_ER =  $1_B$  and TXD =  $01_H$  at the Gigabit MII or an equivalent interface. In 1000BASE-T LPI mode, the transmit function of the enters a quiet mode only after the transmits "sleep" and receives "sleep" from the link partner. If the link partner chooses not to signal LPI, then the PHY can also not become quiet. However, LPI requests are passed from one end of the link to the other regardlessly, and system energy savings can be achieved even if the PHY link does not become quiet. The 1000BASE-T LPI is symmetric on the PHY layer but remains asymmetric (transmit and receive independently) at xMII level and above. Note that the indicates a receive LPI by asserting RX\_DV =  $0_B$ , RX\_ER =  $1_B$  and RXD =  $01_H$  at the GMII or an equivalent interface. The wake-time for 1000BASE-T is of 30  $\mu$ s.

#### 3.5.3.4 Auto-Negotiation for EEE Modes

It is imperative that EEE capability is advertised, since, except for 10BASE-Te, a compliant link partner is required. Similarly to 1000BASE-T auto-negotiation, the automatically advertises EEE capability if this is enabled using next pages. EEE capability is stored in the MMD.ANEG.EEE\_AN\_ADV registers (refer to EEE Auto-Negotiation Advertisement Register). Setting this register to zero disables EEE. After a successful negotiation the link partners' capabilities are stored in the MMD.ANEG.EEE\_AN\_LPADV register (refer to EEE Auto-Negotiation Link-Partner Advertisement Register). After a successful auto-negotiation, the GPY111 performs an auto-resolution on the exchanged capabilities. The result is combined with the speed resolution. Whether or not a link is able to operate EEE is reported in the MDIO.PHY.MIISTAT.EEE register (refer to Media-Independent Interface Status).

### 3.5.4 Wake-on-LAN (WoL)

Wake-on-LAN (WoL) is an essential feature of the GPY111. By means of an integrated packet trace engine that is capable of monitoring and detecting WoL packets, the PHY is able to wake a larger SoC from its power-down state. This is done by indicating such an event via the external interrupt sourced by the GPY111. This scenario is shown in Figure 9. Consequently, the SoC can switch GPY111off everything except the interrupt controller, in order to save the maximum amount of power. The GPY111 can trace WoL packets in any of its supported speed modes:10/100/1000 Mbit/s. Since WoL is a standby system feature, it can happen that the residual power consumption of the GPY111 is critical. Therefore, it is recommended to put the PHY into a lower power state, for example 10BASE-T or 100BASE-T, before the SoC enters its power-down state. If the link supports EEE (see also Chapter 3.5.3), this is not required since the PHY can be put into low-power mode by means of an LPI assert signal. Once a WoL packet is detected, the GPY111 issues a wake-up indication to the SoC by activating the MDINT signal (see also Chapter 3.4.3.3).



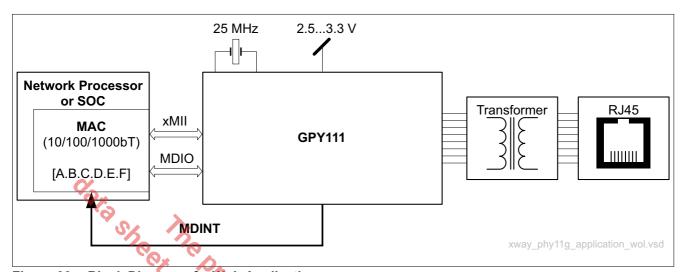


Figure 30 Block Diagram of a WoL Application

The most commonly used WoL packet is a magic packet [14]. A magic packet is a deterministic packet that contains the MAC address of the device that is to be woken up. A magic packet can be encapsulated into any type of higher-layer protocol, for example TPC/IP or UDP. Regardless of the higher-layer protocol used, the setup of the core magic packet is always the same.

The format of a magic packet is shown in **Figure 31** for an example with a MAC address of AA<sub>H</sub>.BB<sub>H</sub>.CC<sub>H</sub>.DD<sub>H</sub>.EE<sub>H</sub>.FF<sub>H</sub> and an optional password of 00<sub>H</sub>.11<sub>H</sub>.22<sub>H</sub>.33<sub>H</sub>.44<sub>H</sub>.55<sub>H</sub>. The example magic packet is shown encapsulated in the content of a conventional Ethernet MAC frame structure. The magic packet itself contains of a header which is a sequence of 6 consecutive FF<sub>H</sub> Bytes. Following this header is a repetition for 16 times of the target MAC address of the device to be woken up. Note that this address can also be any standard broadcast address. An optional field containing a 6 Byte wake-up password follows. The GPY111 scans for this password if it is configured. Otherwise, this field is ignored.

The GPY111 is a pure PHY and does not include a MAC or have a MAC address. The SoC must configure its own MAC address, for example AA<sub>H</sub>.BB<sub>H</sub>.CC<sub>H</sub>.DD<sub>H</sub>.EE<sub>H</sub>.FF<sub>H</sub>, into the WoL packet monitoring engine of the GPY111, using the MDIO interface. The same applies in case the optional password is intended to be used.

The configuration of the MAC address and the optional SecureOn password relevant for the WoL logic inside the GPY111 is performed via MDIO registers. For the given example, programming is done according to the steps illustrated in **Table 30**. Note that, by definition, a SecureOn password of  $00_{\rm H}$ . $00_{$ 



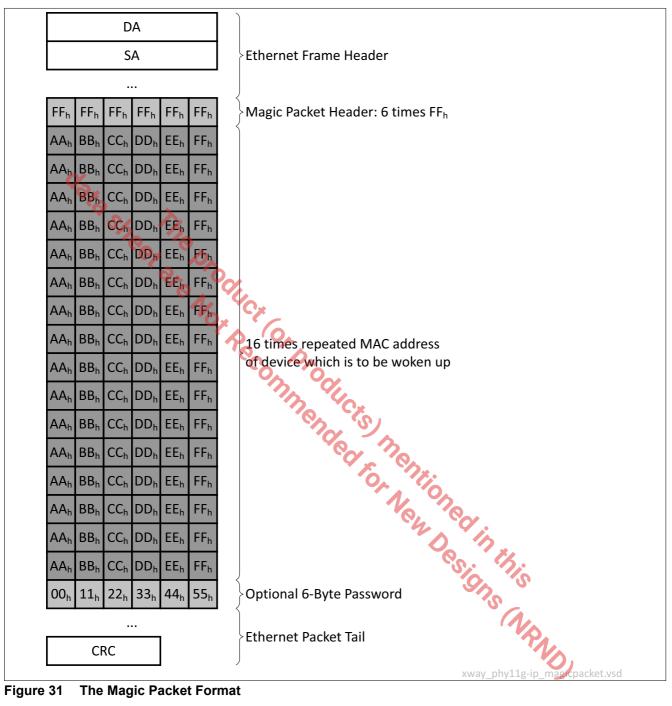


Figure 31 The Magic Packet Format

Table 30 **Programming Sequence for the Wake-On-LAN Functionality** 

Step	Register Access	Remark
1	MDIO.MMD.WOLADO = AA <sub>H</sub>	Program the first MAC address byte
2	MDIO.MMD.WOLAD1 = BB <sub>H</sub>	Program the second MAC address byte
3	MDIO.MMD.WOLAD2 = CC <sub>H</sub>	Program the third MAC address byte
4	MDIO.MMD.WOLAD3 = DD <sub>H</sub>	Program the fourth MAC address byte
5	MDIO.MMD.WOLAD4 = EE <sub>H</sub>	Program the fifth MAC address byte
6	MDIO.MMD.WOLAD5 = FF <sub>H</sub>	Program the sixth MAC address byte



Table 30 Programming Sequence for the Wake-On-LAN Functionality (cont'd)

Step	Register Access	Remark
7	MDIO.MMD.WOLPW0 = 00 <sub>H</sub>	Program the first SecureON password byte
8	MDIO.MMD.WOLPW1 = 11 <sub>H</sub>	Program the second SecureON password byte
9	MDIO.MMD.WOLPW2 = 22 <sub>H</sub>	Program the third SecureON password byte
10	MDIO.MMD.WOLPW3 = 33 <sub>H</sub>	Program the fourth SecureON password byte
11	MDIO.MMD.WOLPW4 = 44 <sub>H</sub>	Program the fifth SecureON password byte
12	MDIO.MMD.WOLPW5 = 55 <sub>H</sub>	Program the sixth SecureON password byte
13	MDIO.PHY.IMASK.WOL = 1 <sub>B</sub>	Enable the Wake-On-LAN interrupt mask
14	MDIO.MMD.WOLCTRL.WOL.EN = 1 <sub>B</sub>	Enable Wake-On-LAN functionality

#### **Power Down Modes** 3.5.5

This section introduces the power-down modes that are supported by the GPY111. These modes can be associated to states as shown in Figure 32. The functionality of each mode and the state transitions are discussed in detail in the subsequent sections.

GPY111 & vided in the up to the name of the property of the pr The higher level software can monitor the GPY111 and take measures to save power in case an Ethernet cable is not connected. More details will be provided in the upcoming GPY111 Power Saving Method application note [15], for reference.



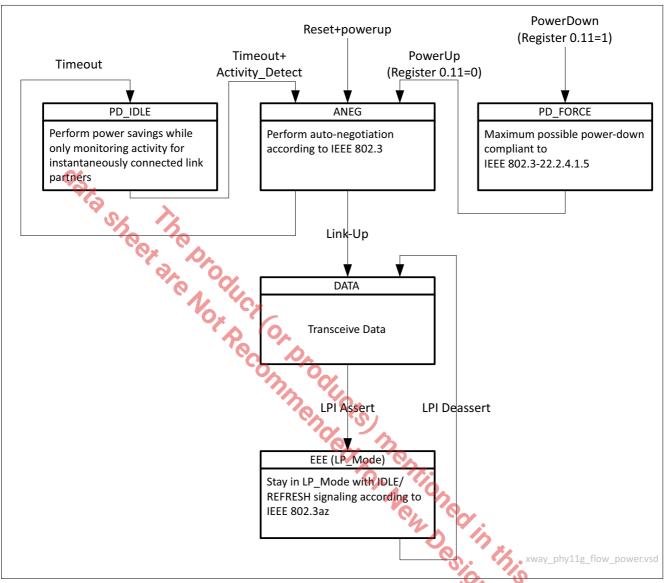


Figure 32 State Diagram for Power-Down Mode Management

#### 3.5.5.1 PD FORCE Mode

The PD\_FORCE mode is entered by setting the register MDIO.STD.CTRL.PD to logic 1, regardless of the current state of the device. Active links are dropped when the PHY is leaving the DATA mode. The sleep mode corresponds to power down as specified in IEEE 802.3 [1], clause 22.2.4.1.5. The device still reacts to MDIO management transactions. The interface clocks to the MAC are switched off. No signal is transmitted on the MDI. Since this mode is entered manually, the device will wake neither itself nor any link partner. Leaving the PD\_FORCE mode is only possible by setting the register MDIO.STD.CTRL.PD =  $0_B$ .



#### 3.5.5.2 **ANEG Mode**

In the Auto-Negotiation (ANEG) mode, the PHY tries to establish a connection to a potential link partner. The PHY remains in this state for a reasonably long time until a successful link partner has been detected, either through parallel detection or by an auto-negotiation process itself. After a successful link partner detection, the PHY enters the DATA mode by performing a link-up. However, since in most Ethernet systems the default mode is still an open port (no link-partner is connected), the idle power consumption during ANEG mode contributes significantly to the power budget. The GPY111 supports an optimized power-down mode during auto-negotiation. Whenever no link partner is detected for a certain amount of time, the PHY moves into the PD IDLE mode (Chapter 3.5.5.3). It only comes back from the PD IDLE mode into the ANEG mode after a time-out, or whenever a signal is detected coming from the link partner. Returning to ANEG mode after a time-out is required to wake up link partners that use similar power-saving schemes, for example another GPY111.

#### 3.5.5.3 PD VDLE Mode

This is a sub-state supporting power-saving methodologies during auto-negotiation (see also Chapter 3.5.5.2).

#### 3.5.5.4 **DATA Mode**

The DATA mode is used to establish and maintain a link connection. Once this connection is dropped, the PHY moves back into ANEG mode. During DATA mode, the PHY is linked up and data can be transmitted and received. If the EEE mode (Chapter 3.5.5.5) of operation has been negotiated during the ANEG mode, the PHY moves into and out of the EEE mode whenever instructed to by the MAC's LPI agent.

#### 3.5.5.5 **EEE Mode**

Shich is 3.5.3. Portioned in this way. This is the Energy-Efficient Ethernet (EEE) low-power mode which is entered after an LPI assert command from the MAC's LPI agent. More details can be found in Chapter 3.5.3



## 3.6 Testing Functions

This section describes the test and verification features supported for the GPY111.

## 3.6.1 JTAG Interface

The GPY111 integrates a JTAG port according to IEEE 1149.1 [8], which defines a test access port and a boundary scan architecture. The JTAG interface of the GPY111 consists of a 4-pin Test Access Port (TAP) as specified in Chapter 2.2.6. It includes the mandatory signals TMS, TCK, TDI and TDO.

When using JTAG mode with the internal DC/DC switching regulator, a clock signal needs to be applied at XTAL. The integrated TAP controller of the GPY111 supports the op-codes as shown in **Table 31**.

Table 31 JTAG TAP Controller Op-Codes

Instruction	Instruction Code	JTAG Register	Register Width	Comment
EXTEST	00000 <sub>B</sub>	Boundary scan	On	Allows for testing of external circuitry connected between GPY111 and other components on the same PCB. The GPY111 drives a previously loaded (using the PRELOAD instruction) pattern to all its outputs and samples all its inputs.
SAMPLE/PR ELOAD	00001 <sub>B</sub>	Boundary scan	mmen	Allows a snapshot to be taken of all pins within the boundary scan during normal mode of operation, as well as for the values to be read out. This instruction also allows for patterns to be loaded into the boundary scan test cells in advance of other JTAG test instructions.
IDCODE	10001 <sub>B</sub>	Device ID	32	Returns the JTAG boundary scan ID according to Table 32 on TDO.
CLAMP	00010 <sub>B</sub>	Bypass	1	Allows the state of the signals driven from all GPY111 pins within the boundary scan to be determined from the boundary scan register. Simultaneously, the bypass register is selected as the serial path between TDI and TDO. The signals determined from the boundary scan register remain unchanged while the CLAMP instruction is selected.
HIGHZ	00011 <sub>B</sub>	Bypass	1	Forces all outputs of the GPY111 into a high-impedance state. This prevents damage of components when testing according to IEEE1149.1 with components not following this standard.
BYPASS	11111 <sub>B</sub>	Bypass	1	Bypasses the integrated TAP controller by connecting TDI to TDO via a single register, i.e. with one TCK period delay.
RESERVED	Remaining			

As specified in **Table 31**, the IDCODE instruction returns the device ID on the TDO pin. The encoding of this device ID is given in **Table 32**.

Table 32 JTAG Boundary Scan ID

Description	Device Version [31:28]	Device Code [27:12]	Manufacture Code [11:1]	Mandatory LSB
Value	0001 <sub>B</sub>	0000 0001 1100 1100 <sub>B</sub>	0000 1000 001 <sub>B</sub>	1 <sub>B</sub>



## 3.6.2 Payload Data Tests

This chapter specifies several payload-data test features that are integrated in the GPY111.

### 3.6.2.1 Test Packet Generator (TPG)

The integrated Test Packet Generator (TPG) allows for test packets to be sent over the line even when no MAC is connected to the MII, or when the connected MAC is inactive. This is done by multiplexing the TPG output into the transmit data path of the MAC interface. The TPG is controlled by MDIO.PHY.TPGCTRL and MDIO.PHY.TPGDATA (refer to Test-Packet Generator Control and Test-Packet Generator Data). It can be effectively used in the following applications:

- Electrical-characteristics test for 10BASE-T and 100BASE-TX
- BER measurements

The test packet is limited to layer-2 functionality with restricted configuration possibilities determined by MDIO.PHY.TPGCTRI.The basic test packet structure is shown in Figure 33.

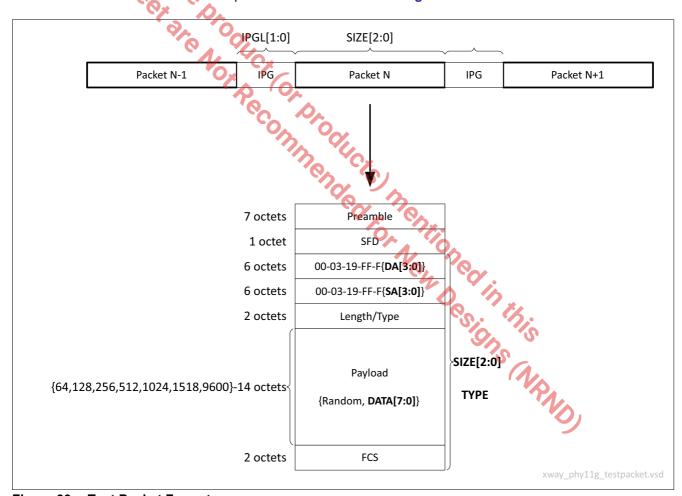


Figure 33 Test Packet Format



#### 3.6.2.2 Error Counters

The GPY111 incorporates a general-purpose error counter, accessible via the MDIO.PHY.ERRCNT.\* MDIO management registers. MDIO.PHY.ERRCNT.SEL allows an error source to be selected. The number of errors are counted and written to MDIO.PHY.ERRCNT.COUNT. This counter is cleared upon read access, and saturates at the value MDIO.PHY.ERRCNT.COUNT =  $FF_H$ . This prevents ambiguous monitoring results created by an overflow. The error counter is only applicable to the twisted-pair PHY modes. For information on types of errors, refer to Chapter 4.

## 3.6.3 Test Loops

The GPY111 supports several te t loops to support system integration. Note that these loops are activated on the first link-up after the register programming.

The individual loop-back functions are covered in the following sections, as well as how to enable and disable them.

## 3.6.3.1 Near-End Test Loops

The near-end test loops are used to verify system integration of an GPY111 device. They allow for closed loop-backs of data and signals at different OSI reference layers. The following sections describe these loop-backs in descending order of OSI abstraction layer.

## 3.6.3.1.1 MAC Interface Test Loop

The MAC interface test loop allows raw xMII transmit data to be looped back to the xMII receive port. In the high-level block diagram in **Figure 34**, the test loop data-path is marked by the area shaded in gray. This test loop can be applied to all the supported MAC interfaces described in **Chapter 3.2**. If required, the conversion of data and control information is handled internally.

There are two methods for setting up this test loop. The first uses the IEEE loop-back setting: MDIO.STD.CTRL.LB =  $1_B$ . In this mode, the MII speed must be configured manually using the MDIO.STD.CTRL.SS\* speed selection bits. Also, the PHY is not operable towards the MDI.

The second method uses the MDIO.PHY.PHYCTL1.TLOOP = NETL GPY111 proprietary test-loop setting. The test loop is activated at the next link-up.

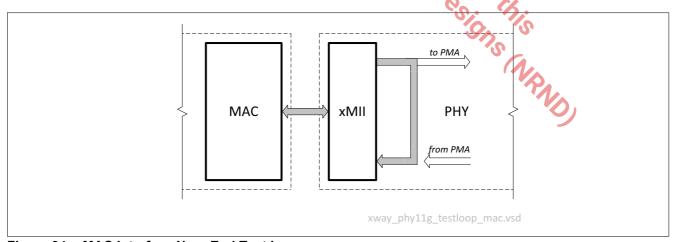


Figure 34 MAC Interface Near-End Test Loop



## 3.6.3.1.2 MDI Test Loop

The MDI test loop allows for loop-back of the signal at the MDI connector, for example RJ45 or SMB. Referring to the four available twisted pairs in a CAT5 or equivalent cable type, pair A is connected to pair B, and pair C to D. This shorting of near-end twisted pairs must be enabled using specialized termination circuitry. Note that no additional resistors are required, since the ports of the GPY111 are already inherently terminated. **Figure 35** shows a high-level block diagram, where the test loop data-path is marked by the area shaded in gray. This test loop can be applied to all the supported MAC interfaces described in **Chapter 3.2**. The test-loop mode is activated by setting MDIO.PHY.PHYCTL1.TLOOP = RJ45. The test loop is activated at the next link-up.

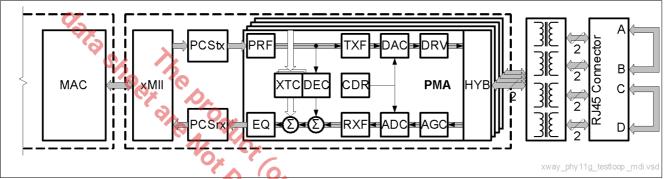


Figure 35 MDI connector Near-End Test Loop

## 3.6.3.1.3 Echo Test Loop

The DEC (Digital Echo Canceler) test loop allows for the transmit signal to be looped back via the Digital Echo Canceler (DEC). This loop-back is similar to the functionality of the MDI test loop as described in Chapter 3.6.3.1.2, except that it does not require a special termination circuitry at the MDI connector. The user of this test loop has the option to terminate each twisted pair with a  $100~\Omega$  resistor. When executing this test, the PMA trains the DEC to the echo that is inherently present because of non-ideal line terminations. Since there is no farend signal, and the echo is canceled out at the summation point, the synthesized echo replica signal at the output of the DEC is used as a receive signal. This setup allows for the complete transceiver to be tested in 1000BASE-T mode, without the need for additional hardware to be attached. Figure 36 shows a high-level block diagram, where the test loop data-path is marked by the area shaded in gray. This test loop can be applied to all the supported MAC interfaces described in Chapter 3.2, but is only applicable to 1000BASE-T. The test loop is activated by setting MDIO.PHY.PHYCTL1.TLOOP = ECHO, and by activating the 1000BASE-T forced mode using MDIO.STD.CTRL.SSM =  $1_B$  and MDIO.STD.CTRL.SSL =  $0_B$ .

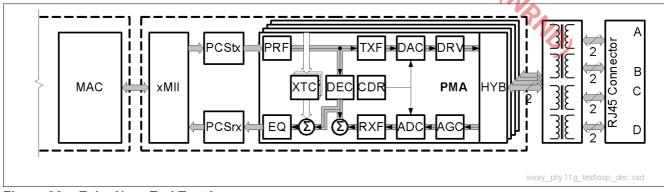


Figure 36 Echo Near-End Test Loop



#### 3.6.3.2 **Far-End Test Loop**

The PCS far-end test loop allows for the receive data at the output of the receive PCS to be fed back into the transmit path, that is, the input of the transmit PCS. The received data is also available at the xMII interface output, however all xMII transmit data is ignored in this test mode. Figure 37 shows a high-level block diagram, where the test loop data-path is marked by the area shaded in gray. This test loop can be applied to all the supported MAC interfaces described in Chapter 3.2. The test is also applicable to all supported types of MDI physical-layer standards described in Chapter 3.3. This test loop is activated by setting the MDIO.PHY.PHYCTL1.TLOOP = FETL. Note that the test-loop is only operable when the link is operational. It is activated at the next link-up.

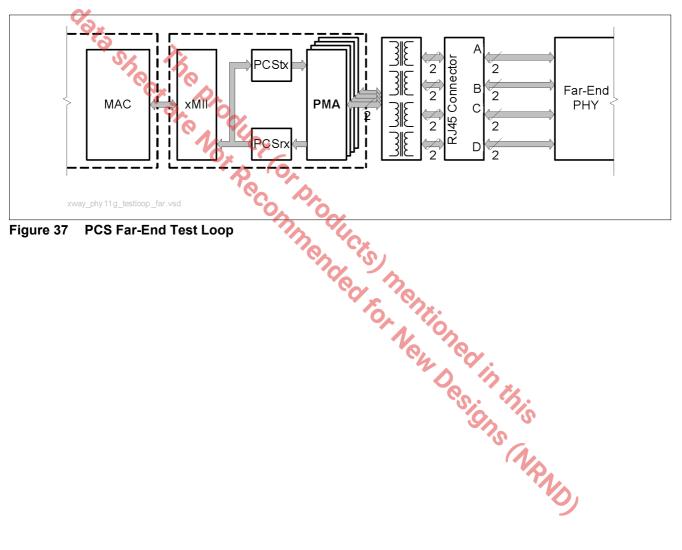


Figure 37 **PCS Far-End Test Loop** 



# 4 MDIO Registers

This chapter defines all the registers needed to operate the module "MDIO\_REGIST ERS". 1)

Table 33 Registers Address Space

Module	Base Address	End Address	Note
MDIO_REGISTERS	00 <sub>H</sub>	60 <sub>H</sub>	

Table 34	Registers	Overview
----------	-----------	----------

Register Short Name	Register Long Name	Offset Address	Page Number
STD	<b>&gt;</b>		
STD_CTRL	Control	00 <sub>H</sub>	82
STD_STAT	Status Registers	01 <sub>H</sub>	85
STD_PHYID1	PHY Identifier 1	02 <sub>H</sub>	87
STD_PHYID2	PHY Identifier 2	03 <sub>H</sub>	88
STD_AN_ADV	Auto-Negotiation Advertisement	04 <sub>H</sub>	89
STD_AN_LPA	Auto-Negotiation Link-Partner Ability	05 <sub>H</sub>	90
STD_AN_EXP	Auto-Negotiation Expansion	06 <sub>H</sub>	92
STD_AN_NPTX	Auto-Negotiation Next-Page Transmit Register	07 <sub>H</sub>	93
STD_AN_NPRX	Auto-Negotiation Link-Partner Received Next-Page Register Gigabit Control Register Gigabit Status Register Reserved Reserved MMD Access Control Register	08 <sub>H</sub>	94
STD_GCTRL	Gigabit Control Register	09 <sub>H</sub>	96
STD_GSTAT	Gigabit Status Register	0A <sub>H</sub>	98
STD_RES11	Reserved	0B <sub>H</sub>	100
STD_RES12	Reserved	0С <sub>н</sub>	100
STD_MMDCTRL	MMD Access Control Register	0D <sub>H</sub>	101
STD_MMDDATA	MMD Access Data Register	0E <sub>H</sub>	102
STD_XSTAT	Extended Status Register	OF <sub>H</sub>	103
PHY		35	
PHY_PHYPERF	Physical Layer Performance Status	10 <sub>H</sub>	104
PHY_PHYSTAT1	Physical Layer Status 1	11 <sub>H</sub>	105
PHY_PHYSTAT2	Physical Layer Status 2	12 <sub>H</sub>	106
PHY_PHYCTL1	Physical Layer Control 1	13 <sub>H</sub>	107
PHY_PHYCTL2	Physical Layer Control 2	14 <sub>H</sub>	109
PHY_ERRCNT	Error Counter	15 <sub>H</sub>	111
PHY_EECTRL	EEPROM Control Register	16 <sub>H</sub>	112
PHY_MIICTRL	Media-Independent Interface Control	17 <sub>H</sub>	114
PHY_MIISTAT	Media-Independent Interface Status	18 <sub>H</sub>	116
PHY_IMASK	Interrupt Mask Register	19 <sub>H</sub>	117
PHY_ISTAT	Interrupt Status Register	1A <sub>H</sub>	120

<sup>1)</sup> Generated by REFIGE v1.4 - Beta Release XIV



Table 34 Registers Overview (cont'd)

Register Short Name	Register Long Name	Offset Address	Page Number
PHY_LED	LED Control Register	1B <sub>H</sub>	123
PHY_TPGCTRL	Test-Packet Generator Control	1C <sub>H</sub>	125
PHY_TPGDATA	Test-Packet Generator Data	1D <sub>H</sub>	128
PHY_FWV	Firmware Version Register	129	
PHY_RES1F	Reserved	1F <sub>H</sub>	130
The register is addressed	Reserved  d wordwise.	Sentioned in this NAND	



Table 35 Register Access Types

Mode	Symbol
Status Register, Latch-High	ROLH
Status Register, Latch-Low	ROLL
Status Register, Self-Clearing	ROSC
Read-Write Register	RW
Read-Write Register, Self-Clearing	RWSC
Status Register	RO
Read-Write Register, Self-Clearing  Status Register  Status Register  Status Register  Status Register  Status Register  Status Register	Toned in this Opening of the Signs (NAMB)



## 4.1 STD: Standard Management Registers

This section describes the IEEE 802.3 standard management registers.

#### Control

This register controls the main functions of the PHY. See also IEEE 802.3-2008 22.2.4.1.

STD_CTRL Control		Offset 00 <sub>H</sub>					
15	14	13	12	11	10	9	8
RST	S <sub>LB</sub>	SSL	ANEN	PD	ISOL	ANRS	DPLX
rwsc	rw	rw	rw	rw	rw	rwsc	rw
7	6	5					0
COL	SSM	ON OU	7	R	ES		
rw	rw	Ox		ļ	ro		

rw	rw	Ox	Peo P
Field	Bits	Туре	Description
RST	15	RWSC	Reset Resets the PHY to its default state. Active links are terminated. Note that this is a self-clearing bit which is set to zero by the hardware after reset has been done. See also IEEE 802.3-2008 22.2.4.1.1.  Constants  0 <sub>B</sub> NORMAL Normal operational mode 1 <sub>B</sub> RESET Resets the device
LB	14	RW	Loop-Back This mode enables looping back of MII data from the transmit to the receive direction. No data is transmitted to the medium via MDI. The device operates at the selected speed. The collision signal remains deasserted unless otherwise forced by the collision test. See also IEEE 802.8-2008 22.2.4.1.2.  Constants  0 <sub>B</sub> NORMAL Normal operational mode 1 <sub>B</sub> ENABLE Closes the loop-back from TX to RX at xMII
SSL	13	RW	Forced Speed-Selection LSB  Note that this bit only takes effect when the auto-negotiation process is disabled, that is, bit CTRL.ANEN is set to zero. This is the LSB (CTRL.SSL) of the forced speed-selection register SS. In conjunction with the MSB (CTRL.SSM), the following encoding is valid: SS=0: 10 Mbit/s SS=1: 100 Mbit/s SS=2: 1000 Mbit/s SS=3: Reserved



Field	Bits	Туре	Description
ANEN	12	RW	Auto-Negotiation Enable Allows enabling and disabling of the auto-negotiation process capability of the PHY. If enabled, the force bits for duplex mode (CTRL.DPLX) and the speed selection (CTRL.SSM, CTRL.SSL) become inactive. Otherwise, the force bits define the PHY operation. See also IEEE 802.3-2008 22.2.4.1.4. Constants  0 <sub>B</sub> DISABLE Disable the auto-negotiation protocol 1 <sub>B</sub> ENABLE Enable the auto-negotiation protocol
PD	Sheer	RW No.	Power Down Forces the device into a power-down state where power consumption is the bare minimum required to still maintain the MII management interface communication. When activating the power-down functionality, the PHY terminates active data links. None of the xMII interface work in power-down mode. See also IEEE 802.3-2008 22.2.4.1.5.  Constants  0 <sub>B</sub> NORMAL Normal operational mode  1 <sub>B</sub> POWERDOWN Forces the device into power-down mode
ISOL	10	RW	Isolate The isolation mode isolates the PHY from the MAC. MAC interface inputs are ignored, whereas MAC interface outputs are set to tristate (high-impedance). See also IEEE 802.3-2008 22.2.4.1.6.  Constants  0 <sub>B</sub> NORMAL Normal operational mode 1 <sub>B</sub> ISOLATE Isolates the PHY from the MAC
ANRS	9	RWSC	Restart Auto-Negotiation Restarts the auto-negotiation process on the MDI. This bit does not take any effect when auto-negotiation is disabled using (CTRL.ANEN). Note that this bit is self-clearing after the auto-negotiation process is initiated. See also IEEE 802.3-2008 22.2.4.1.7.  Constants  0 <sub>B</sub> NORMAL Stay in current mode 1 <sub>B</sub> RESTART Restart auto-negotiation
DPLX	8	RW	Forced Duplex Mode  Note that this bit only takes effect when the auto-negotiation process is disabled, that is, bit CTRL.ANEN is set to zero. This bit controls the forced duplex mode. It allows forcing of the PHY into full or half-duplex mode. Note that this bit does not take effect in loop-back mode, that is, when bit CTRL.LB is set to one. See also IEEE 802.3-2008 22.2.4.1.8.  Constants  0 <sub>B</sub> HD Half duplex  1 <sub>B</sub> FD Full duplex





Field	Bits	Type	Description
COL	7	RW	Collision Test Allows\$WORKAREA/units/mdio/source testing of the COL signal at the xMII interface. When the collision test is enabled, the state of the TX_EN signal is looped back to the COL signal within a minimum latency time. See also IEEE 802.3-2008 22.2.4.1.9. Constants  0 <sub>B</sub> DISABLE Normal operational mode 1 <sub>B</sub> ENABLE Activates the collision test
SSM	6	RW	Forced Speed-Selection MSB See the description of SSL. See also IEEE 802.3-2008 22.2.4.1.3.
RES	5:0	RO	Reserved Write as zero, ignore on read.
			B ENABLE Normal operational mode  1 <sub>B</sub> ENABLE Activates the collision test  Forced Speed-Selection MSB  See the description of SSL. See also IEEE 802.3-2008 22.2.4.1.3.  Reserved  Write as zero, ignore on read.



## **Status Registers**

This register contains status and capability information about the device. Note that all bits are read-only. A write access by the MAC does not have any effect. See also IEEE 802.3-2008 22.2.4.2.

STD_STAT Status Regis	ters		Offset 01 <sub>H</sub>			Reset Value 7949 <sub>H</sub>		
15	14	13	12	11	10	9	8	
CBT4	СВТХГ	СВТХН	XBTF	хвтн	CBT2F	СВТ2Н	EXT	
ro	ro	ro	ro	ro	ro	ro	ro	
7	<b>S</b> 6	5	4	3	2	1	0	
RES	MFPS	ANOK	RF	ANAB	LS	JD	XCAP	
ro	ro 🦠	ro	rolh	ro	roll	rolh	ro	

ro	ro	ro	rolh	ro	roll	rolh	ro
		of No.	UCK				
Field	Bits	Type	Description				
CBT4	15	RO			ot support this		8 22.2.4.2.1.
CBTXF	14	RO	0		duplex ability ot support this		802.3-2008
СВТХН	13	RO	0	•	If-duplex ability ot support this		802.3-2008
XBTF	12	RO	0	•	uplex ability. S ot support this		02.3-2008
ХВТН	11	RO	5	•	duplex ability. So		802.3-2008



Field	Bits	Type	Description
CBT2F	10	RO	IEEE 100BASE-T2 Full-Duplex Specifies the 100BASE-T2 full-duplex ability. See also IEEE 802.3-2008 22.2.4.2.6. Constants 0 <sub>B</sub> DISABLED PHY does not support this mode 1 <sub>B</sub> ENABLED PHY supports this mode
СВТ2Н	9 % % % % % % % % % % % % % % % % % % %	RO	IEEE 100BASE-T2 Half-Duplex
EXT	8	ROY	Extended Status The extended status registers are used to specify 1000 Mbit/s speed capabilities in the register XSTAT. See also IEEE 802.3-2008 clause 22.2.4.2.16. Constants 0 <sub>B</sub> DISABLED No extended status information available in register 15 1 <sub>B</sub> ENABLED Extended status information available in register 15
RES	7	RO	Reserved Ignore when read.
MFPS	6	RO	Management Preamble Suppression Specifies the MF preamble suppression ability. See also IEEE 802.3-2008 22.2.4.2.9.  Constants  0 <sub>B</sub> DISABLED PHY requires management frames with preamble 1 <sub>B</sub> ENABLED PHY accepts management frames without preamble
ANOK	5	RO	Auto-Negotiation Completed Indicates whether the auto-negotiation process is completed or in progress. See also IEEE 802.3-2008 22.2.4.2.10.  Constants  0 <sub>B</sub> RUNNING Auto-negotiation process is in progress 1 <sub>B</sub> COMPLETED Auto-negotiation process is completed
RF	4	ROLH	Remote Fault Indicates the detection of a remote fault event. See also IEEE 802.3-2008 22.2.4.2.11. Constants 0 <sub>B</sub> INACTIVE No remote fault condition detected 1 <sub>B</sub> ACTIVE Remote fault condition detected
ANAB	3	RO	Auto-Negotiation Ability Specifies the auto-negotiation ability. See also IEEE 802.3-2008 22.2.4.2.12. Constants 0 <sub>B</sub> DISABLED PHY is not able to perform auto-negotiation 1 <sub>B</sub> ENABLED PHY is able to perform auto-negotiation



Field	Bits	Type	Description
LS	2	ROLL	Link Status Indicates the link status of the PHY to the link partner. See also IEEE 802.3-2008 22.2.4.2.13.  Constants  0 <sub>B</sub> INACTIVE The link is down. No communication with link partner possible.  1 <sub>B</sub> ACTIVE The link is up. Data communication with link partner is possible.
JD	Op 1 Sheet	ROLH	Jabber Detect Indicates that a jabber event has been detected. See also IEEE 802.3- 2008 22.2.4.2.14.  Constants  0 <sub>B</sub> NONE No jabber condition detected 1 <sub>B</sub> DETECTED Jabber condition detected
XCAP	0	RO	Extended Capability Indicates the availability and support of extended capability registers. See also IEEE 802.3-2008 22.2.4.2.15. Constants  OB DISABLED Only base registers are supported  1B ENABLED Extended capability registers are supported

### **PHY Identifier 1**

This is the first of two PHY identification registers containing the MSBs of a 32-bit code. This code specifies the Organizationally Unique Identifier (OUI), and the vendor's model and revision number.


STD_PHYID1	Offset	Reset Value
PHY Identifier 1	02 <sub>H</sub>	D565 <sub>H</sub>
15	D. In	8
	OUI Sign Tis	
	ro	<u> </u>
7	$\mathcal{A}_{\lambda}$	0
	OUI	<b>1</b> 0,
	ro	7

Field	Bits	Туре	Description
OUI	15:0	RO	Organizationally Unique Identifier Bits 3:18  This register holds the bits 3:18 of the OUI code, which is specified to be OUI=AC-9A-96. See also IEEE 802.3-2008 22.2.4.3.1.



#### **PHY Identifier 2**

This is the second of 2 PHY identification registers containing the LSBs of a 32-bit code. This code specifies the Organizationally Unique Identifier (OUI), and the vendor's model and revision number. See also IEEE 802.3-2008 22.2.4.3.1.

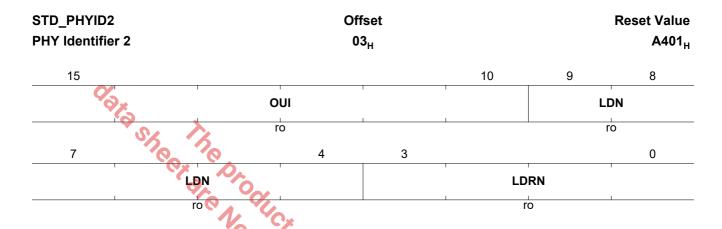

Field	Bits	Туре	Description
OUI	15:10	RO	Organizationally Unique Identifier Bits 19:24  This register holds the bits 19:24 of the OUI code, which is specified to be OUI=AC-9A-96.
LDN	9:4	RO	Lantiq Device Number Specifies the device number, in order to distinguish between several products.
LDRN	3:0	RO	Lantiq Device Revision Number  Specifies the device revision number, in order to distinguish between several versions of this device
			Designs (NAND)



## **Auto-Negotiation Advertisement**

This register contains the advertised abilities of the PHY during auto-negotiation. See also IEEE 802.3-2008 28.2.4.1.3, as well as IEEE 802.3-2008 Table 28-2.

STD_AN_AD Auto-Negotia	V ation Advertis	sement	Offset 04 <sub>H</sub>			Reset Value 01E1 <sub>H</sub>
15	14	13	12			8
NP 矣	RES	RF			TAF	
rw	ro	rw	1		rw	
7	'S /	5	4			0
			SF			
	rw	7A O.			rw	

	rw	dre No.	Tuc <sub>y</sub> _
Field	Bits	Type	Description
NP	15	RW	Next Page Next-page indication is encoded in bit AN_ADV.NP regardless of the selector field value or link code word encoding. The PHY always advertises NP if a 1000BASE-T mode is advertised during autonegotiation. See also IEEE 802.3-2008 28.2.1.2.6.  Constants  0 <sub>B</sub> INACTIVE No next page(s) will follow  1 <sub>B</sub> ACTIVE Additional next page(s) will follow
RES	14	RO	Reserved Write as zero, ignore on read?
RF	13	RW	Remote Fault The remote fault bit allows indication of a fault to the link partner. See also IEEE 802.3-2008 28.2.1.2.4.  Constants  0 <sub>B</sub> NONE No remote fault is indicated 1 <sub>B</sub> FAULT A remote fault is indicated



Field	Bits	Туре	Description
TAF	12:5	RW	Technology Ability Field The technology ability field is an eight-bit wide field containing information indicating supported technologies as defined by the following constants specific to the selector field value. These bits are mapped to individual technologies such that abilities are advertised in parallel for a single selector field value. In converter mode, the field is always forced to value 0x60. The TAF encoding for the IEEE 802.3 selector (AN_ADV.SF=0x1) is described in IEEE 802.3-2008 Annex 28B.2 and in Annex 28D. See also IEEE 802.3-2008 28.2.1.2.2.  Constants  00000001 <sub>B</sub> XBT_HDX Advertise 10BASE-T half duplex  00000010 <sub>B</sub> XBT_FDX Advertise 100BASE-TX half duplex  00001000 <sub>B</sub> DBT_HDX Advertise 100BASE-TX full duplex  00010000 <sub>B</sub> DBT_FDX Advertise 100BASE-TX full duplex  00010000 <sub>B</sub> PS_SYM Advertise symmetric pause  01000000 <sub>B</sub> PS_ASYM Advertise asymmetric pause
SF	4:0	RW	Selector Field The selector field is a five-bit wide field for encoding 32 possible messages. Selector field encoding definitions are shown in IEEE 802.3-2008 Annex 28A. Combinations not specified are reserved for future use. Reserved combinations of the selector field are not to be transmitted. See also IEEE 802.3-2008 28.2.1.2.1.  Constants 00001 <sub>B</sub> IEEE802DOT3 Select the IEEE 802.3 technology

### **Auto-Negotiation Link-Partner Ability**

All of the bits in the auto-negotiation link-partner ability register are read-only. A write to the auto-negotiation link-partner ability register has no effect. This register contains the advertised ability of the link partner (see also IEEE 802.3-2008 Tables 28-3 and 28-4). The bit definitions are a direct representation of the received link-code word (see also IEEE 802.3-2008 Figure 28-7). See also IEEE 802.3-2008 22.2.4.3.3.

STD_AN_LPA Auto-Negotiation Link-Partner Ability				Offset 05 <sub>H</sub>		Reset Value 0000 <sub>H</sub>	
15	14	13	12			<u> </u>	8
NP	ACK	RF		1	TAF	'	1
ro	ro	ro			ro		
7		5	4				0
	TAF			'	SF		
	ro	1			ro	1	



Field	Bits	Type	Description
NP	15	RO	Next Page Next-page request indication from the link partner. See also IEEE 802.3-2008 28.2.1.2.6.  Constants  0 <sub>B</sub> INACTIVE No next page(s) will follow 1 <sub>B</sub> ACTIVE Additional next pages will follow
ACK	14 %// %// %// %// %// %// %// %// %// %//	RO	Acknowledge Acknowledgment indication from the link partner's link-code word. See also IEEE 802.3-2008 28.2.1.2.5.  Constants  0 <sub>B</sub> INACTIVE The device did not successfully receive its link partner's link code word  1 <sub>B</sub> ACTIVE The device has successfully received its link partner's link-code word
RF	13	RO	Remote Fault Remote fault indication from the link partner. See also IEEE 802.3-2008 28.2.1.2.4. Constants 0 <sub>B</sub> NONE Remote fault is not indicated by the link partner 1 <sub>B</sub> FAULT Remote fault is indicated by the link partner
TAF	12:5	RO	Technology Ability Field Indicates the link-partner capabilities as received from the link partner's link-code word. See also IEEE 802.3-2008 28.2.1.2.2.  Constants  00000001 <sub>B</sub> XBT_HDX Link partner advertised 10BASE-T half duplex  000000100 <sub>B</sub> XBT_FDX Link partner advertised 10BASE-T full duplex.  00000100 <sub>B</sub> DBT_HDX Link partner advertised 100BASE-TX half duplex  00001000 <sub>B</sub> DBT_FDX Link partner advertised 100BASE-TX full duplex  00010000 <sub>B</sub> DBT4 Link partner advertised 100BASE-T4  00100000 <sub>B</sub> PS_SYM Link partner advertised symmetric pause  01000000 <sub>B</sub> PS_ASYM Link partner advertised asymmetric pause  10000000 <sub>B</sub> RES Reserved for future technologies; should be zero
SF	4:0	RO	Selector Field The selector field represents one of the 32 possible messages. Note that it must fit to the advertised selector field in AN_ADV.SF. Selector field encoding definitions are shown in IEEE 802.3-2008 Annex 28A.  Constants 00001 <sub>B</sub> IEEE802DOT3 Select the IEEE 802.3 technology



## **Auto-Negotiation Expansion**

This is the auto-negotiation expansion register indicating the status of the link partner's auto-negotiation. See also IEEE 802.3-2008 28.2.4.1.5.

STD_AN_EXP Auto-Negotiation Expansion			Of		Reset Value		
			·	6 <sub>H</sub>			
15			ı		ı	1	8
	<b>%</b>	ı	RI	ESD	ı	1	ı
	40	<b>\</b>	·	ro			
7	- V	5	4	3	2	1	0
	RESD	* D	PDF	LPNPC	NPC	PR	LPANC
	ro	Pro No.	rolh	ro	ro	rolh	ro
Field	Bits	Type	Description				
RESD	15:5	RO	Reserved Write as zero, ig	nore on read.			
PDF	4	ROLH	Parallel Detection Fault  Note that this bit latches high. It is set to zero upon read of AN_EXP. See also IEEE 802.3-2008 28.2.4.1.5.  Constants  0 <sub>B</sub> NONE A fault has not been detected via the parallel detection function  1 <sub>B</sub> FAULT A fault has been detected via the parallel detection function				
LPNPC	3	RO	_		2.4.1.5. unable to exc		_
NPC	2	RO	Next-Page Cap See also IEEE 8 Constants 0 <sub>B</sub> UNABLE	able	2.4.1.5. s unable to ex	change next	pages
PR	1	ROLH	Page Received Note that this bit latches high. It is set to zero upon read of AN_EXP. See also IEEE 802.3-2008 28.2.4.1.5.  Constants  0 <sub>B</sub> NONE A new page has not been received  1 <sub>B</sub> RECEIVED A new page has been received				
LPANC	0	RO	Link Partner A See also IEEE 8 Constants 0 <sub>B</sub> UNABLE	-	2.4.1.5.	o-negotiate	

**CAPABLE** Link partner is auto-negotiation capable

1<sub>B</sub>



## **Auto-Negotiation Next-Page Transmit Register**

The auto-negotiation next-page transmit register contains the next-page link-code word to be transmitted when next-page ability is supported. On power-up, this register contains the default value of 0x2001, which represents a message page with the message code set to the null message. See also IEEE 802.3-2008 28.2.4.1.6.

STD_AN_NF Auto-Negoti Register	PTX ation Next-Pa	ge Transmit		fset 7 <sub>H</sub>			Reset Value 2001 <sub>H</sub>
15 🔾	14	13	12	11	10		8
NP	RES	MP	ACK2	TOGG		MCF	
rw	ro	rw	rw	ro		rw	-
7	· Ox	DA					0
		To Ody	M	CF			
		OFR	Copp	w			

Field	Bits	Туре	Description
NP	15	RW	Next Page See IEEE 802.3-2008 28.2.3.4. Constants 0 <sub>B</sub> INACTIVE Last page 1 <sub>B</sub> ACTIVE Additional next page(s) will follow
RES	14	RO	Reserved Write as zeros, ignore on read.
MP	13	RW	Message Page Indicates that the content of MCF is either an unformatted page or a formatted message. See IEEE 802.3-2008 28.2.3.4.  Constants  0 <sub>B</sub> UNFOR Unformatted page 1 <sub>B</sub> MESSG Message page
ACK2	12	RW	Acknowledge 2 See also IEEE 802.3-2008 28.2.3.4.  Constants  0 <sub>B</sub> INACTIVE Device cannot comply with message  1 <sub>B</sub> ACTIVE Device will comply with message
TOGG	11	RO	Toggle See also IEEE 802.3-2008 28.2.3.4.  Constants  0 <sub>B</sub> ZERO Previous value of the transmitted link-code word was equal to logic ONE  1 <sub>B</sub> ONE Previous value of the transmitted link-code word was equal to logic ZERO
MCF	10:0	RW	Message or Unformatted Code Field See also IEEE 802.3-2008 28.2.3.4.



### **Auto-Negotiation Link-Partner Received Next-Page Register**

The auto-negotiation link-partner received next-page register contains the next-page link-code word received from the link partner. See also IEEE 802.3-2008 28.2.4.1.7.

STD_AN_NF Auto-Negoti Next-Page R	ation Link-Pa	ırtner Receive		fset 8 <sub>H</sub>			Reset Value 2001 <sub>H</sub>
15	14	13	12	11	10		8
NP ?	ACK	MP	ACK2	TOGG		MCF	I
ro	Sro	ro	ro	ro		ro	
7	100	20					0
		Programme		CF ro		1	
Field	D:40	Tuna	6,				

Field	Bits	Type	Description
NP	15	RO	Next Page See IEEE 802.3-2008 28.2.3.4. Constants  0 <sub>B</sub> INACTIVE No next pages to follow 1 <sub>B</sub> ACTIVE Additional next page(s) will follow
ACK	14	RO	Acknowledge See also IEEE 802.3-2008 28.2.3.4.  Constants  0 <sub>B</sub> INACTIVE The device did not successfully receive its link partner's link-code word  1 <sub>B</sub> ACTIVE The device has successfully received its link partner's link-code word
MP	13	RO	Message Page Indicates that the content of MCF is either an unformatted page or a formatted message. See also IEEE 802.3-2008 28.2.3.4.  Constants  0 <sub>B</sub> UNFOR Unformatted page 1 <sub>B</sub> MESSG Message page
ACK2	12	RO	Acknowledge 2 See also IEEE 802.3-2008 28.2.3.4. Constants 0 <sub>B</sub> INACTIVE Device cannot comply with message 1 <sub>B</sub> ACTIVE Device will comply with message



Field	Bits	Туре	Description
TOGG	11	RO	Toggle See also IEEE 802.3-2008 28.2.3.4. Constants  0 <sub>B</sub> ZERO Previous value of the transmitted link-code word was equal to logic ONE.  1 <sub>B</sub> ONE Previous value of the transmitted link-code word was equal to logic ZERO.
MCF	10:0	RO	Message or Unformatted Code Field See also IEEE 802.3-2008 28.2.3.4.
		* Ore No.	to logic ONE.  1 <sub>B</sub> ONE Previous value of the transmitted link-code word was equal to logic ZERO.  Message or Unformatted Code Field  See also IEEE 802.3-2008 28.2.3.4.



## **Gigabit Control Register**

This is the control register used to configure the Gigabit Ethernet behavior of the PHY. See also IEEE 802.3-2008 40.5.1.1.

STD_GCTRL Gigabit Contr				set 9 <sub>H</sub>	Reset Value 0300 <sub>H</sub>		
15		13	12	11	10	9	8
0/.	ТМ		MSEN	мѕ	MSPT	MBTFD	MBTHD
•	rw		rw	rw	rw	rw	rw
7	\S_2 /	<b>&gt;</b>					0
	COX	PA	1	ES .			
	9		r	0			

		3.	ro
		Type	Que,
Field	Bits	Type	Description
ТМ	15:13	RW	Transmitter Test Mode This register field allows enabling of the standard transmitter test modes. See also IEEE 802.3-2008 Table 40-7.  Constants  000 <sub>B</sub> NOP Normal operation  001 <sub>B</sub> WAV Test mode 1 transmit waveform test  010 <sub>B</sub> JITM Test mode 2 transmit jitter test in MASTER mode  011 <sub>B</sub> JITS Test mode 3 transmit jitter test in SLAVE mode  100 <sub>B</sub> DIST Test mode 4 transmitter distortion test  101 <sub>B</sub> RESD0 Reserved, operations not identified.  110 <sub>B</sub> CDIAG Cable diagnostics.  111 <sub>B</sub> ABIST Analog build in self-test
MSEN	12	RW	Master/Slave Manual Configuration Enable See also IEEE 802.3-2008 40.5.1.1.  Constants  0 <sub>B</sub> DISABLED Disable master/slave manual configuration value 1 <sub>B</sub> ENABLED Enable master/slave manual configuration value
MS	11	RW	Master/Slave Config Value Allows forcing of master or slave mode manually when AN_GCTRL.MSEN is set to logical one. See also IEEE 802.3-2008 40.5.1.1. Constants 0 <sub>B</sub> SLAVE Configure PHY as SLAVE during master/slave negotiation, only when AN_GCTRL.MSEN is set to logical one 1 <sub>B</sub> MASTER Configure PHY as MASTER during master/slave negotiation, only when AN_GCTRL.MSEN is set to logical one



Field	Bits	Type	Description
MSPT	10	RW	Master/Slave Port Type Defines whether the PHY advertises itself as a multi- or single-port
			device, which in turn impacts the master/slave resolution function. See also IEEE 802.3-2008 40.5.1.1.
			Constants
			<ul><li>0<sub>B</sub> SPD Single-port device</li><li>1<sub>B</sub> MPD Multi-port device</li></ul>
MBTFD	9	RW	
MIDIFU	Shee	RVV	1000BASE-T Full-Duplex Advertises the 1000BASE-T full-duplex capability; always forced to 1 in converter mode. See also IEEE 802.3-2008 40.5.1.1.
	10	<i>&gt;</i>	Constants
	700	20	<ul> <li>0<sub>B</sub> DISABLED Advertise PHY as not 1000BASE-T full-duplex capable</li> <li>1<sub>B</sub> ENABLED Advertise PHY as 1000BASE-T full-duplex capable</li> </ul>
MBTHD	8	RW	1000BASE-T Half-Duplex
		01.	Advertises the 1000BASE-T half-duplex capability; always forced to 1 in
		10.	converter mode. See also IEEE 802.3-2008 40.5.1.1.  Constants
			DISABLED Advertise PHY as not 1000BASE-T half-duplex
			capable
			1 <sub>B</sub> <b>ENABLED</b> Advertise PHY as 1000BASE-T half-duplex capable
RES	7:0	RO	Reserved Write as zero, ignore on read.
			Reserved Write as zero, ignore on read.
			Design this
			75/1/2



## **Gigabit Status Register**

This is the status register used to reflect the Gigabit Ethernet status of the PHY. See also IEEE 802.3-2008 40.5.1.1.

STD_GSTAT Gigabit Status	s Register		Off 0A	set A <sub>H</sub>		Reset \		
15	14	13	12	11	10	9	8	
MSFAULT	MSRES	LRXSTAT	RRXSTAT	MBTFD	MBTHD	RES		
rolh	ro	ro	ro	ro	ro	ro		
7	\S\ /						0	
	COM	P	IE	C				
	Q	) O O O	ro	sc				

		Type	rosc
Field	Bits	Туре	Description
MSFAULT	15	ROLH	Master/Slave Manual Configuration Fault This is a latching high bit. It is cleared upon each read of GSTAT. This bit will self clear on auto-negotiation enable or auto-negotiation complete. This bit will be set to active high if the number of failed master/slave resolutions reaches 7. See also IEEE 802.3-2008 40.5.1.1 register 10 in Table 40-3.  Constants  0 <sub>B</sub> OK Master/slave manual configuration resolved successfully 1 <sub>B</sub> NOK Master/slave manual configuration resolved with a fault
MSRES	14	RO	Master/Slave Configuration Resolution See IEEE 802.3 40.5.1.1 register 10 in Table 40-3.  Constants  0 <sub>B</sub> SLAVE Local PHY configuration resolved to SLAVE 1 <sub>B</sub> MASTER Local PHY configuration resolved to MASTER
LRXSTAT	13	RO	Local Receiver Status Indicates the status of the local receiver. See also IEEE 802.3-2008 40.5.1.1 register 10 in Table 40-3.  Constants  0 <sub>B</sub> NOK Local receiver not OK 1 <sub>B</sub> OK Local receiver OK
RRXSTAT	12	RO	Remote Receiver Status Indicates the status of the remote receiver. See also IEEE 802.3-2008 40.5.1.1 register 10 in Table 40-3.  Constants 0 <sub>B</sub> NOK Remote receiver not OK 1 <sub>B</sub> OK Remote receiver OK




Field	Bits	Type	Description
MBTFD	11	RO	Link-Partner Capable of Operating 1000BASE-T Full-Duplex See also IEEE 802.3-2008 40.5.1.1 register 10 in Table 40-3.  Constants  0 <sub>B</sub> DISABLED Link partner is not capable of operating 1000BASE-T full-duplex  1 <sub>B</sub> ENABLED Link partner is capable of operating 1000BASE-T full-duplex
MBTHD	10 Sheet	RO	Link-Partner Capable of Operating 1000BASE-T Half-Duplex See also IEEE 802.3-2008 40.5.1.1 register 10 in Table 40-3.  Constants  0 <sub>B</sub> DISABLED Link partner is not capable of operating 1000BASE-T half-duplex  1 <sub>B</sub> ENABLED Link partner is capable of operating 1000BASE-T half-duplex
RES	9:8	RO	Reserved Write as zero, ignore on read.
IEC	7:0	ROSC	Idle Error Count Not implemented.
			Reserved Write as zero, ignore on read.  Idle Error Count Not implemented.



#### Reserved


Reserved. In IEEE 802.3-2008, this register is used for Power-Sourcing-Equipment (PSE) control functions (see IEEE 802.3-2008 33.6.1.1), which is not supported by this PHY.

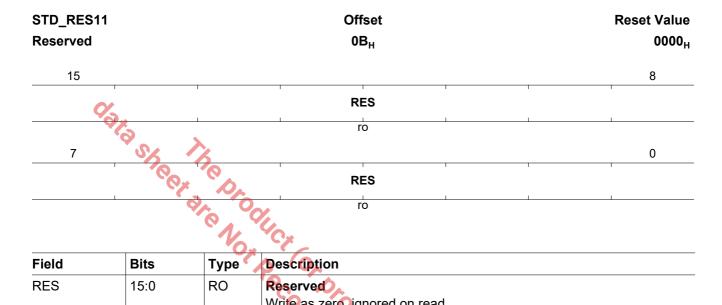

Field	Bits	Type	Description
RES	15:0	RO	Reserved Write as zero, ignored on read.

#### Reserved

Reserved. In IEEE 802.3-2008, this register is used for Power-Sourcing-Equipment (PSE) status functions (see IEEE 802.3-2008 33.6.1.2), which is not supported by this PHY.

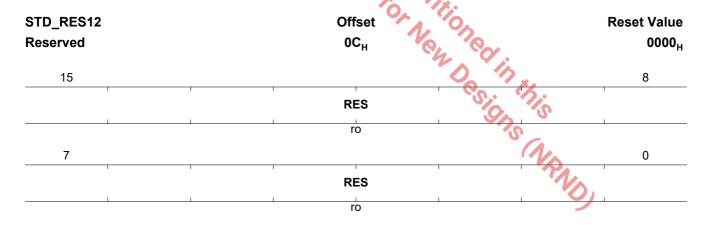

Field	Bits	Туре	Description
RES	15:0	RO	Reserved Write as zero, ignored on read.



### **MMD Access Control Register**

The MMD access control register is used in conjunction with the MMDDATA register to access the MMD register space. Each MMD maintains its own individual address register, as described in IEEE 802.3-2008 clause 45.2.8. The DEVAD field directs any accesses of register MMDDATA to the appropriate MMD as described in IEEE 802.3-2008 clause 45.2. For additional insight into the operation and use of the MMD registers, see IEEE 802.3-2008 clause 22.2.4.3.11, Annex 22D and clause 45.2.

STD_MMDCTRL	Offset	Reset Value
MMD Access Control Register	0D <sub>H</sub>	0000 <sub>H</sub>
15 14 13		8
ACTYPE	RESH	ı
rw Cy Dy	ro	
7 % 50	4	0
RESL	DEVAD	·
ro	rw	
The state of the s	D <sub>r</sub>	

Field	Bits	Туре	Description
ACTYPE	15:14	RW	Access Type Function  If the access of register MMDDATA is an address access (ACTYPE=0) then it is directed to the address register within the MMD associated with the value in the DEVAD field. Otherwise, both the DEVAD field and the MMD's address register direct the register MMDDATA data accesses to the appropriate registers within that MMD. The function field can be set to any of the constants defined (ADDRESS, DATA, DATA_PI, DATA_PIWR).  Constants  O0 <sub>B</sub> ADDRESS Accesses to register MMDDATA access the MMD individual address register  O1 <sub>B</sub> DATA Accesses to register MMDDATA access the register within the MMD selected by the value in the MMD's address register  OBATA_PI Accesses to register MMDDATA access the register within the MMD selected by the value in the MMD's address register. After this access is complete, for both read and write accesses, the value in the MMD address field is incremented.  DATA_PIWR Accesses to register MMDDATA access the register within the MMD selected by the value in the MMD's address register. After this access is complete, for write accesses only, the value in the MMDs address field is incremented. For read accesses, the value in the MMDs address field is not modified.
RESH	13:8	RO	Reserved Write as zero, ignored on read.
RESL	7:5	RO	Reserved Write as zero, ignored on read.



Field	Bits	Туре	Description
DEVAD	4:0	RW	Device Address The DEVAD field directs any accesses of register MMDDATA to the appropriate MMD as described in IEEE 802.3-2008 clause 45.2.

### **MMD Access Data Register**

The MMD access data register is used in conjunction with the MMD access control (MMDCTRL) register to access the MMD register space. For more information on MMD access, refer to IEEE 802.3-2008 clause 22.2.4.3.12, clause 45.2 and Annex 22D.

Offset 0E <sub>H</sub>	Reset Value 0000 <sub>H</sub>	
	8	
ADDR_DATA		
rw rw	0	
ADDR_DATA	1	
	OE <sub>H</sub> ADDR_DATA	

Field	Bits	Type	Description
ADDR_DATA	15:0	RW	Address or Data Register
			This register accesses either a specific MMD address register or the data
			content of the MMD register to which this address register points. Which
			of the functions is currently valid is defined by the MMDCTRL register.
			Osions (NAND)



## **Extended Status Register**

This register contains extended status and capability information about the PHY. Note that all bits are read-only. A write access does not have any effect.

STD_XSTAT Extended Sta	atus Register			fset F <sub>H</sub>		Reset Value 3000 <sub>H</sub>
15	14	13	12	11		8
MBXF	МВХН	MBTF	мвтн		RESH	
ro	ro	ro	ro	I	ro	
7	\sqrt{\sq}\}}\sqrt{\sq}}}}}}\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sq}}}}}}}\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sq}}}}}}\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sqrt{\sq}}}}}}}\sqrt{\sqrt{\sqrt{\sq}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}}	<b>&gt;</b>				0
	COM	Op	RE	SL		
	Ó	/A O O	r	О		

No ro					
Field	Bits	Type	Description		
MBXF	15	RO	1000BASE-X Full-Duplex Capability Specifies whether the PHY is capable of operating 1000BASE-X full-duplex.  Constants  0 <sub>B</sub> DISABLED PHY does not support this mode 1 <sub>B</sub> ENABLED PHY supports this mode		
МВХН	14	RO	1000BASE-X Half-Duplex Capability Specifies whether the PHY is capable of operating 1000BASE-X half-duplex. Constants  0 <sub>B</sub> DISABLED PHY does not support this mode 1 <sub>B</sub> ENABLED PHY supports this mode		
MBTF	13	RO	1000BASE-T Full-Duplex Capability Specifies whether the PHY is capable of operating 1000BASE-T full-duplex. Constants  0 <sub>B</sub> DISABLED PHY does not support this mode 1 <sub>B</sub> ENABLED PHY supports this mode		
MBTH	12	RO	1000BASE-T Half-Duplex Capability Specifies whether the PHY is capable of operating 1000BASE-T full-duplex. Constants 0 <sub>B</sub> DISABLED PHY does not support this mode 1 <sub>B</sub> ENABLED PHY supports this mode		
RESH	11:8	RO	Reserved Ignore when read.		
RESL	7:0	RO	Reserved Ignore when read.		




## 4.2 PHY: PHY-Specific Management Registers

This chapter describes the PHY-specific management registers.

### **Physical Layer Performance Status**

This register reports the PHY performance in the current mode of operation. The content of this register is only valid when the link is up.

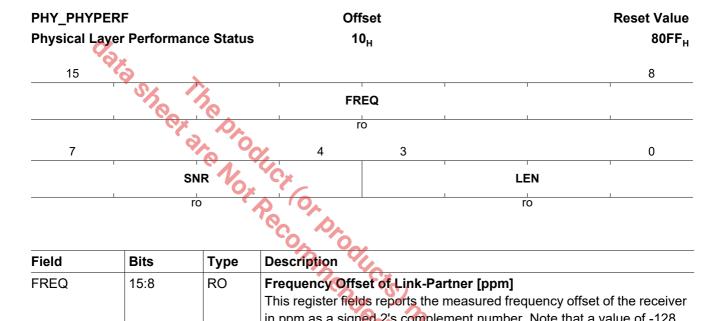

Field	Bits	Туре	Description		
FREQ	15:8	RO	Frequency Offset of Link-Partner [ppm] This register fields reports the measured frequency offset of the receiver in ppm as a signed 2's complement number. Note that a value of -128 (0x80) indicates an invalid number.		
SNR	7:4	RO	Receive SNR Margin [dB] This register field reports the measured SNR margin of the receiver in dB. The value saturates at a 14-dB SNR margin for very short links and 0 dB for very long links. A value of 15 indicates an invalid number.  Constants 1111 <sub>B</sub> INVALID Invalid value		
LEN	3:0	RO	Estimated Loop Length (Valid During Link-Up) This register field reports the estimated loop length compared to a virtually ideal CAT5e straight cable. The unit is LEN x 10m. A value of 15 indicates an invalid number.		



## **Physical Layer Status 1**

This register reports PHY lock information, for example link-up, polarity reversals and port mapping. The content of this register is only valid when the link is up.

<del>-</del>	PHY_PHYSTAT1 Physical Layer Status 1			Offset 11 <sub>H</sub>			Reset Value 0000 <sub>H</sub>
15						9	8
0/.	'	'	RESH	'			LSADS
	Ö		ro		1		rosc
7	<b>S</b> 6	5	4	3	2	1	0
POLD	POLC	POLB	POLA	MDICD	MDIAB	R	ESL
ro	ro	ro	ro	ro	ro		ro

Field	Bits	Type	Description		
RESH	15:9	RO	Reserved Write as zero, ignored on read.		
LSADS	8	ROSC	Link-Speed Auto-Downspeed Status  Monitors the status of the link speed auto-downspeed controlled in PHYCTL1.LDADS  Constants  0 <sub>B</sub> NORMAL Did not perform any link speed auto-downspeed  1 <sub>B</sub> DETECTED Detected an auto-downspeed		
POLD	7	RO	Receive Polarity Inversion Status on Port D Constants  0 <sub>B</sub> NORMAL Polarity normal 1 <sub>B</sub> INVERTED Polarity inversion detected		
POLC	6	RO	Receive Polarity Inversion Status on Port Constants  O <sub>B</sub> NORMAL Polarity normal  1 <sub>B</sub> INVERTED Polarity inversion detected		
POLB	5	RO	Receive Polarity Inversion Status on Port B Constants  0 <sub>B</sub> NORMAL Polarity normal 1 <sub>B</sub> INVERTED Polarity inversion detected		
POLA	4	RO	Receive Polarity Inversion Status on Port A  Constants  0 <sub>B</sub> NORMAL Polarity normal  1 <sub>B</sub> INVERTED Polarity inversion detected		
MDICD	3	RO	Mapping of MDI ports C and D Constants  0 <sub>B</sub> MDI Normal MDI mode 1 <sub>B</sub> MDIX Crossover MDI-X mode		



Field	Bits	Туре	Description
MDIAB	2	RO	Mapping of MDI ports A and B Constants  0 <sub>B</sub> MDI Normal MDI mode 1 <sub>B</sub> MDIX Crossover MDI-X mode
RESL	1:0	RO	Reserved Write as zero, ignored on read.

## **Physical Layer Status 2**

This register reports PHY lock information, for example, pair skews in the GbE mode. The content of this register is only valid when the link is up.

PHY_PHYSTA Physical Lay		he prod		fset 2 <sub>H</sub>			Reset Value 0000 <sub>H</sub>
15	14	1 440	12	11	10		8
RESD		SKEWD	6	RESC		SKEWC	
ro		ro 😯	2 10	ro		ro	
7	6		0,40	3	2		0
RESB		SKEWB	The.	RESA		SKEWA	
ro	ı	ro	700	ro	1	ro	-

ro		ro	TO TO TO
Field	Bits	Туре	Description
RESD	15	RO	Reserved Write as zero, ignored on read
SKEWD	14:12	RO	Receive Skew on Port D  The skew is reported as an unsigned number of symbol periods.
RESC	11	RO	Reserved Write as zero, ignored on read.
SKEWC	10:8	RO	Receive Skew on Port C The skew is reported as an unsigned number of symbol periods.
RESB	7	RO	Reserved Write as zero, ignored on read.
SKEWB	6:4	RO	Receive Skew on Port B  The skew is reported as an unsigned number of symbol periods.
RESA	3	RO	Reserved Write as zero, ignored on read.
SKEWA	2:0	RO	Receive Skew on Port A  The skew is reported as an unsigned number of symbol periods.



## **Physical Layer Control 1**

This register controls the PHY functions.

PHY_PHYCTL1 Physical Layer Control 1		Offset 13 <sub>H</sub>				Reset Value 0001 <sub>H</sub>	
15		13	12	11			8
	TLOOP	1	TXOFF		TX	ADJ	'
0/3	rw	I	rw		r	W	<u> </u>
7	6	5	4	3	2	1	0
POLD	POLC	POLB	POLA	MDICD	MDIAB	TXEEE10	AMDIX
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
TLOOP	15:13	RW	Test Loop Configures predefined test loops. Constants  000 <sub>B</sub> OFF Test loops are switched off - normal operation.  001 <sub>B</sub> NETL Near-end test loop  010 <sub>B</sub> FETL Far-end test loop  011 <sub>B</sub> ECHO Echo test loop  100 <sub>B</sub> RJTL RL45 connector test loop  101 <sub>B</sub> FETLS Standalone Far-end test loop. No dependency on TX_CLK and RX_CLK on the (G)MII interface
TXOFF	12	RW	Transmitter Off This register bit allows turning off of the transmitter. This feature might be useful for return loss measurements.  Constants  O <sub>B</sub> ON Transmitter is on  1 <sub>B</sub> OFF Transmitter is off
TXADJ	11:8	RW	Transmit Level Adjustment Transmit-level adjustment can be used to fine tune the transmit amplitude of the PHY. The amplitude adjustment is valid for all supported speed modes. The adjustment is performed in digits. One digit represents 3.125 percent of the nominal amplitude. The scaling factor is gain = 1 + signed(TXADJ)*2^-7.
POLD	7	RW	Transmit Polarity Inversion Status on Port D Constants  0 <sub>B</sub> NORMAL Polarity normal 1 <sub>B</sub> INVERTED Polarity inversion
POLC	6	RW	Transmit Polarity Inversion Status on Port C Constants  0 <sub>B</sub> NORMAL Polarity normal 1 <sub>B</sub> INVERTED Polarity inversion



Field	Bits	Type	Description
POLB	5	RW	Transmit Polarity Inversion Control on Port B Constants  0 <sub>B</sub> NORMAL Polarity normal 1 <sub>B</sub> INVERTED Polarity inversion
POLA	4	RW	Transmit Polarity Inversion Control on Port A  Constants  0 <sub>B</sub> NORMAL Polarity normal  1 <sub>B</sub> INVERTED Polarity inversion
MDICD %	3	RW	Mapping of MDI Ports C and D Constants  0 <sub>B</sub> MDI Normal MDI mode 1 <sub>B</sub> MDIX Crossover MDI-X mode
MDIAB	2	RW	Mapping of MDI Ports A and B Constants  O <sub>B</sub> MDI Normal MDI mode 1 <sub>B</sub> MDIX Crossover MDI-X mode
TXEEE10	1	RO	Transmit Energy-Efficient Ethernet 10BASE-Te Amplitude This register bit allows enabling of the 10BASE-Te energy-efficient mode transmitting only with a 1.75 V nominal amplitude.  Constants  0 <sub>B</sub> DISABLED Transmit the 10Base-T amplitude, that is, 2.3 V 1 <sub>B</sub> ENABLED Transmit the 10BASE-Te amplitude, that is, 1.75 V
AMDIX	0	RW	PHY Performs Auto-MDI/MDI-X or Uses Manual MDI/MDI-X Constants
			0 <sub>B</sub> 1 <sub>B</sub> MANUAL PHY uses manual MDI/MDI-X AUTO PHY performs Auto-MDI/MDI-X



# **Physical Layer Control 2**

This register controls the PHY functions.

PHY_PHYCTL2 Physical Layer Control 2			Off 14	Reset Value 8006 <sub>H</sub>			
15	14	13		11	10	9	8
LS	ADS		RESH	'	CLKSEL	SDETP	STICKY
0	rw		ro	I	rw	rw	rw
7	6	<b>\</b>	4	3	2	1	0
	R	ESL	ı	ADCR	PSCL	ANPD	RES
		ro Orodu	1	rw	rw	rw	ro
Fiold	Rite	Type D	ecription				

Field	Bits	Type	Description
LSADS	15:14	RW	Link Speed Auto-Downspeed Control Register Link speed auto-downspeed is a functionality which allows an Ethernet link to be established even in non-standard harsh cable environments.  Constants  00 <sub>B</sub> OFF Do not perform link speed auto-downspeed  01 <sub>B</sub> ADS2 Perform auto-downspeed of link speed after 2 consecutive failed link-ups  10 <sub>B</sub> ADS3 Perform auto-downspeed of link speed after 3 consecutive failed link-ups  11 <sub>B</sub> ADS4 Perform auto-downspeed of link speed after 4 consecutive failed link-ups
RESH	13:9	RO	Reserved Write as zero, ignored on read.
STICKY	8	RW	Sticky-Bit Handling Allows enabling/disabling of the sticky-bit handling for all PHY-specific MDIO register bits of type RW, except for the TPGCTRL register. This means that the current content of these registers is left untouched during a software reset if sticky-bit handling is enabled.  Constants  0 <sub>B</sub> OFF Sticky-bit handling is disabled  1 <sub>B</sub> ON Sticky-bit handling is enabled
RESL	7:5	RO	Reserved Write as zero, ignored on read.
ADCR	4:3	RW	ADC Resolution Boost. Allows for the ADC resolution to be increased. Constants  00 <sub>B</sub> DEFAULT Default ADC resolution.  01 <sub>B</sub> BOOST ADC resolution boost.



Field	Bits	Type	Description			
PSCL	2	RW	Power-Consumption Scaling Depending on Link Quality Allows enabling/disabling of the power-consumption scaling dependent on the link quality.  Constants  0 <sub>B</sub> OFF PSCL is disabled 1 <sub>B</sub> ON PSCL is enabled			
ANPD	1 Sho	RW	Auto-Negotiation Power Down Allows enabling/disabling of the power-down Modes during autonegotiation looking for a link partner.  Constants  0 <sub>B</sub> OFF ANPD is disabled  1 <sub>B</sub> ON ANPD is enabled			
			ecommended thention			
			OB OFF PSCL is disabled  Auto-Negotiation Power Down Allows enabling/disabling of the power-down Modes during autonegotiation looking for a link partner.  Constants  OB OFF ANPD is disabled  B ON ANPD is enabled			



#### **Error Counter**

This register controls the error counter. It allows the number of errors detected in the PHY to be counted for monitoring purposes.



Field	Bits	Туре	Description
RES	15:12	RO	Reserved Write as zero, ignored on read.
SEL	11:8	RW	Select Error Event Configures the error/event to which the error counter is sensitive. Constants  0000 <sub>B</sub> RXERR Receive errors are counted 0001 <sub>B</sub> RXACT Receive frames are counted 0010 <sub>B</sub> ESDERR ESD errors are counted 0011 <sub>B</sub> SSDERR SSD errors are counted 0100 <sub>B</sub> TXERR Transmit errors are counted 0100 <sub>B</sub> TXACT Transmit frames events get counted 0110 <sub>B</sub> COL Collision events get counted 1000 <sub>B</sub> NLD Number of Link Down get counted 1001 <sub>B</sub> NDS Number of auto-downspeed get counted Note: RXERR and SSDERR values could be inaccurate when EEE is activated
COUNT	7:0	ROSC	Counter State This counter state is updated each time the selected error event has been detected. The counter state is reset every time a read operation on this register is performed or the error event is changed. The counter saturates at value 0xFF.



## **EEPROM Control Register**

This register controls the external EEPROM via indirect accesses in the MDIO address space. It can be used to perform read and write accesses to the external EEPROM connected to the PHY. The actual reset value of this register depends on the soft pin-strapping settings.

PHY_EECTRL EEPROM Control Register				fset 6 <sub>H</sub>			Reset Value 0000 <sub>H</sub>
15	14	13	12	11			8
EESCAN	EEAF	CSRDET	EEDET		SI	İZE	1
rw	rolh	rolh	rolh		r	w	
7	6	0	4	3	2	1	0
ADRMODE	Q.	DADR		SPE	EED	RDWR	EXEC
rw		rw		n	W	ro	ro

rw		Tw Tw	rw ro ro
Field	Bits	Туре	Description
EESCAN	15	RW	Constants  0 <sub>B</sub> DISABLE EEPROM configuration scan is done only after hardware reset  1 <sub>B</sub> ENABLE EEPROM configuration scan is also done after software reset
EEAF	14	ROLH	EEPROM Access Failure Indication Constants  0 <sub>B</sub> UNDETECTED No EEPROM access error (read or write) has been detected  1 <sub>B</sub> DETECTED An EEPROM access error (read or write) has been detected
CSRDET	13	ROLH	Configuration Signature Record Detect Indication Constants  0 <sub>B</sub> UNDETECTED CSR has not been found 1 <sub>B</sub> DETECTED CSR has been detected
EEDET	12	ROLH	EEPROM Detect Indication Constants  0 <sub>B</sub> UNDETECTED No EEPROM is has been detected 1 <sub>B</sub> DETECTED An EEPROM is has been detected



Field	Bits	Type	Description
SIZE	11:8	RW	EEPROM Size  Defines the size of the connected EEPROM. After reset, this register contains the size extracted from the soft pin-strapping.  Constants  0000 <sub>B</sub> SIZE1K SIZE1K  0001 <sub>B</sub> SIZE2K SIZE2K  0010 <sub>B</sub> SIZE4K SIZE4K
ADRMODE	7	RW	EEPROM Addressing Mode Defines the device addressing mode of the connected EEPROM. After reset, this register contains the size extracted from the soft pin-strapping. Constants  0 <sub>B</sub> MODE11 11-bit addressing mode 1 <sub>B</sub> MODE16 16-bit addressing mode
DADR	6:4	RW	EEPROM Device Address  Defines the device address of the connected EEPROM. After reset, this register contains the size extracted from the soft pin-strapping.
SPEED	3:2	RW	EEPROM Speed  Defines the device address of the connected EEPROM. After reset, this register contains the size extracted from the soft pin-strapping.  Constants  00 <sub>B</sub> FRQ_100KHZ EEPROM is accessed at 100 kHz  01 <sub>B</sub> FRQ_400KHZ EEPROM is accessed at 400 kHz  10 <sub>B</sub> FRQ_1_0MHZ EEPROM is accessed at 1 MHz  11 <sub>B</sub> FRQ_3_4MHZ EEPROM is accesses at 3.4 MHz
RDWR	1	RO	EEPROM Read/Write Control Constants  0 <sub>B</sub> READ Read access to the external EEPROM 1 <sub>B</sub> WRITE Write access to the external EEPROM
EXEC	0	RO	Execute EEPROM Read/Write Control This register is used to initiate an external EEPROM access. The bit remains set until the access is completed. Constants  0 <sub>B</sub> IDLE No access to the external EEPROM is currently pending 1 <sub>B</sub> EXECUTE Access to the external EEPROM is currently pending



## **Media-Independent Interface Control**

This register controls the MII interface in its various operational modes. The contents of this register reflects the options chosen by pinstrapping in the no-EEPROM mode. In this mode, writing to this register has no impact on operation of the device. In case the EEPROM mode is used, the registers content can be programmed by the user to alter the settings."

PHY_MIICTRI Media-Indepe	_ endent Interface Con		ffset 17 <sub>H</sub>			Reset Value 8000 <sub>H</sub>
15 💘	14	12	11	10		8
RXCOFF	RXSK	KEW	V25_33		TXSKEW	
rw	70 70 rw	1	rw		rw	
7	6 % 05	4	3		_	0
CF		FLOW			DDE	1
n	N	rw		r	W	

Field	Bits	Туре	Description
RXCOFF	15	RW	Receive Clock Control Allows disabling of the RXCLK. Constants  0 <sub>B</sub> OFF RXCLK is inactive when link is down 1 <sub>B</sub> ON RXCLK is active also then link is down
RXSKEW	14:12	RW	Receive Timing Skew (RGMII)  Defines the receive timing skew in the RGMII mode using the integrated delay generation on RX_CLK. Note that this register is subject to default reset values which depend on soft pin-strappings.  Constants  000 <sub>B</sub> SKEW_0N0 0.0 ns timing skew  001 <sub>B</sub> SKEW_0N5 0.5 ns timing skew  010 <sub>B</sub> SKEW_1N0 1.0 ns timing skew  100 <sub>B</sub> SKEW_1N5 1.5 ns timing skew  100 <sub>B</sub> SKEW_2N0 2.0 ns timing skew  101 <sub>B</sub> SKEW_2N5 2.5 ns timing skew  110 <sub>B</sub> SKEW_3N0 3.0 ns timing skew  111 <sub>B</sub> SKEW_3N5 3.5 ns timing skew
V25_33	11	RW	Power Supply Control for MII Pins Required for standard compliant operation of RGMII.  Constants  0 <sub>B</sub> V33 MII is operated at 3.3 V  1 <sub>B</sub> V25 MII is operated at 2.5 V



Field	Bits	Type	Description
TXSKEW	7:6	RW	Transmit Timing Skew (RGMII)  Defines the transmit timing skew in the RGMII mode using the integrated delay generation on TX_CLK. Note that this register is subject to default reset values which depend on soft pin-strappings.  Constants  000 <sub>B</sub> SKEW_0N0 0.0 ns timing skew  001 <sub>B</sub> SKEW_0N5 0.5 ns timing skew  010 <sub>B</sub> SKEW_1N0 1.0 ns timing skew  010 <sub>B</sub> SKEW_1N5 1.5 ns timing skew  100 <sub>B</sub> SKEW_2N0 2.0 ns timing skew  101 <sub>B</sub> SKEW_2N0 3.0 ns timing skew  110 <sub>B</sub> SKEW_3N0 3.0 ns timing skew
CRS	7:6	RWFO	CRS Sensitivity Configuration Constants  00 <sub>B</sub> TXRX_RX HDX:TX+RX, FDX:RX  01 <sub>B</sub> TXRX_0 HDX:TX+RX, FDX:0  10 <sub>B</sub> RX_RX HDX:RX, FDX:RX  11 <sub>B</sub> RX_0 HDX:RX, FDX:0
FLOW	5:4	RW	Data Flow Configuration This register field controls the data flow of the Ethernet frames in the PHY. The MAC interface type is selected by MODE.  Constants  00 <sub>B</sub> COPPER MAC interface to twisted-pair  11 <sub>B</sub> CONVERTER Media converter: fiber to twisted-pair
MODE	3:0	RW	This register field controls the operation of the MII interface depending on the FLOW configuration.  Constants  (FLOW = COPPER)  0000 <sub>B</sub> RGMII RGMII mode  0010 <sub>B</sub> RGMII SGMII mode  0010 <sub>B</sub> RMII RMII mode, that is, link speed is forced to 10/100 Mbit/s only  0011 <sub>B</sub> RES0 Reserved  0100 <sub>B</sub> GMII (G)MII mode, that is, MII in 10/100 Mbit/s and GMII in 1000  Mbit/s speed modes  0101 <sub>B</sub> RES1 Reserved  0110 <sub>B</sub> SGMII_NC SGMII mode (without serial clock)  1111 <sub>B</sub> TEST Test Mode for SGMII  (FLOW = CONVERTER)  0000 <sub>B</sub> CONV_X2T1000 Convert 1000BASE-X (without ANEG) to  1000BASE-T. Continuous signal detection is needed to start ANEG  on the 1000BASE-T interface.  0001 <sub>B</sub> CONV_X2T1000A Convert 1000BASE-X (with ANEG) to  1000BASE-T. Successful 1000BASE-X negotiation is needed to  start ANEG on the 1000BASE-T interface.



# **Media-Independent Interface Status**

This register contains status information of the MII interface.

PHY_MIISTAT Media-Independent Ir		fset 8 <sub>H</sub>			Reset Value 0000 <sub>H</sub>	
15						8
'		RE	SH	'		1
%.	1		ro			
7 6	5	4	3	2	1	0
PHY	P	<b>PS</b>	DPX	EEE	SP	EED
ro	Or Op r	0	ro	ro	ı	ro
	are Volt					

Field	Bits	Type	Description
RESH	15:8	RO	Reserved
			Write as zero, ignored on read.
PHY	7:6	RO	Active PHY Interface.  Constants  00 <sub>B</sub> TP The twisted-pair interface is the active PHY interface  01 <sub>B</sub> FIBER The fiber interface is the active PHY interface  10 <sub>B</sub> MII2 The second MIL interface is the active PHY interface  11 <sub>B</sub> SGMII The SGMII interface is the active PHY interface
PS	5:4	RO	Resolved Pause Status for Flow Control Constants  00 <sub>B</sub> NONE No PAUSE  01 <sub>B</sub> TX Transmit PAUSE  10 <sub>B</sub> RX Receive PAUSE  11 <sub>B</sub> TXRX Both transmit and receive PAUSE
DPX	3	RO	Duplex mode at which the MII currently operates.  Constants  0 <sub>B</sub> HDX Half duplex  1 <sub>B</sub> FDX Full duplex
EEE	2	RO	Resolved Energy-Efficient Ethernet Mode Constants  0 <sub>B</sub> OFF EEE is disabled after auto-negotiation resolution 1 <sub>B</sub> ON EEE is enabled after auto-negotiation resolution
SPEED	1:0	RO	PHY Speed at which the MII Currently Operates Constants  00 <sub>B</sub> TEN 10 Mbit/s  01 <sub>B</sub> FAST 100 Mbit/s  10 <sub>B</sub> GIGA 1000 Mbit/s  11 <sub>B</sub> FRE FRE mode



## **Interrupt Mask Register**

This register defines the mask for the Interrupt Status Register (ISTAT). Each masked interrupt is able to activate the MDINT pin to the management device. The information about the interrupt source can be extracted by reading the ISTAT register. A read operation on the ISTAT register simultaneously clears the interrupts, deactivating MDINT.

		Reset Value 0000 <sub>H</sub>		
10	9	8		
ANC	RESH	I		
rw	ro			
2	1	0		
DXMC	LSPC	LSTC		
rw	rw	rw		
	rw 2	ANC RESH		

Field	Bits	Type	Description
WOL	15	RW	Wake-On-LAN Event Mask When active and masked in IMASK, the MDINT is activated upon detection of a valid Wake-On-LAN event. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
MSRE	14	RW	Master/Slave Resolution Error Mask When active, MDINT is activated upon detection of a master/slave resolution error during a 1000BASE-T auto-negotiation. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
NPRX	13	RW	Next Page Received Mask When active, MDINT is activated upon reception of a next page in STD.AN_NPRX. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
NPTX	12	RW	Next Page Transmitted Mask When active, MDINT is activated upon transmission of the currently stored next page in STD.AN_NPTX. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated



Field	Bits	Туре	Description
ANE	11	RW	Auto-Negotiation Error Mask When active, MDINT is activated upon detection of an auto-negotiation error. Constants 0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
ANC	10 You y	RW	Auto-Negotiation Complete Mask When active, MDINT is activated upon completion of the auto-negotiation process. Constants 0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
AMBF	9	RW No.	MDIO Handling Fault When active, MDINT is activated upon detection that the MDIO handling FIFO has overflowed and as such flushed and init by FW. This shall indicate that one or more of the MDIO transactions before this event may be lost.  Constants 0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
LOR	8	RW	SyncE Lost Of Reference  When active, MDINT is activated upon detection that the SyncE reference clock is lost.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out  1 <sub>B</sub> ACTIVE Interrupt is activated
RESL	7:6	RO	Reserved Write as zeroes, ignore on read.
ADSC	5	RW	Link-Speed Auto-Downspeed Detect Mask When active, MDINT is activated upon detection of a link speed auto-downspeed event.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
MDIPC	4	RW	MDI Polarity Change Detect Mask When active, MDINT is activated upon detection of an MDI polarity change event. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
MDIXC	3	RW	MDIX Change Detect Mask When active, MDINT is activated upon detection of an MDI/MDIX cross- over change event. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated



Field	Bits	Туре	Description
DXMC	2	RW	Duplex Mode Change Mask
			When active, MDINT is activated upon detection of full- or half-duplex
			change.
			Constants
			0 <sub>B</sub> INACTIVE Interrupt is masked out
		D)4/	1 <sub>B</sub> ACTIVE Interrupt is activated
LSPC	1	RW	Link Speed Change Mask When active, MDINT is activated upon detection of link speed change.
01			Constants
49	<b>K</b>		0 <sub>B</sub> INACTIVE Interrupt is masked out
•	φ		1 <sub>B</sub> <b>ACTIVE</b> Interrupt is activated
LSTC	0	RW	Link State Change Mask
	CO <sub>X</sub>	4	When active MDINT is activated upon detection of link status shangs
	(a)	0	Constants
		0, 0	0 <sub>B</sub> INACTIVE Interrupt is masked out
		1/2	ACTIVE Interrupt is activated
			Constants  D <sub>B</sub> INACTIVE Interrupt is masked out  ACTIVE Interrupt is activated



#### **Interrupt Status Register**

This register defines the Interrupt Status Register (ISTAT). Each masked interrupt (IMASK) is able to activate the MDINT pin to the management device. The information about the interrupt source can be extracted by reading the ISTA register. A read operation on the ISTAT register simultaneously clears the interrupts and this deactivates MDINT.

PHY_ISTAT Interrupt Stat	us Register		Off 1	Reset Value 0000 <sub>H</sub>			
15	14	13	12	11	10	9	8
WOL	MSRE	NPRX	NPTX	ANE	ANC	RE	SH
rolh	rolh	rolh	rolh	rolh	rolh	rolh	
7	6 0*	<b>6</b> 5	4	3	2	1	0
RE	SL	ADSC	MDIPC	MDIXC	DXMC	LSPC	LSTC
ro	lh	rolh	rolh	rolh	rolh	rolh	rolh
		P	Opposition				

Field	Bits	Type	Description
WOL	15	ROLH	Wake-On-LAN Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of a valid Wake-On-LAN event.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
MSRE	14	ROLH	Master/Slave Resolution Error Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of a master/slave resolution error during a 1000BASE-T autonegotiation.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
NPRX	13	ROLH	Next Page Received Interrupt Status When active and masked in IMASK, the MDINT is activated upon reception of a next page in STD.AN_NPRX. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
NPTX	12	ROLH	Next Page Transmitted Interrupt Status When active and masked in IMASK, the MDINT is activated upon transmission of the currently stored next page in STD.AN_NPTX. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated



Field	Bits	Туре	Description
ANE	11	ROLH	Auto-Negotiation Error Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of an auto-negotiation error. Constants 0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
ANC	10 You Share 9 9 8 P. Share 9	ROLH	Auto-Negotiation Complete Interrupt Status When active and masked in IMASK, the MDINT is activated upon completion of the auto-negotiation process.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
AMBF	9	RW	MDIO Handling Fault When active and masked in IMASK, MDINT is activated upon detection that the MDIO handling FIFO has overflowed and as such flushed and init by FW. This shall indicate that one or more of the MDIO transactions before this event may be lost.  Constants  OB INACTIVE Interrupt is masked out  1B ACTIVE Interrupt is activated
LOR	8	ROLH	SyncE Lost Of Reference  When active and masked in IMASK, MDINT is activated upon detection that the SyncE reference clock is lost.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out  1 <sub>B</sub> ACTIVE Interrupt is activated
RESL	7:6	ROLH	Reserved Write as zeroes, ignore on read.
ADSC	5	ROLH	Link Speed Auto-Downspeed Detect Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of a link speed auto-downspeed event.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
MDIPC	4	ROLH	MDI Polarity Change Detect Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of an MDI polarity change event.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out  1 <sub>B</sub> ACTIVE Interrupt is activated
MDIXC	3	ROLH	MDIX Change Detect Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of an MDI/MDIX cross-over change event.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out  1 <sub>B</sub> ACTIVE Interrupt is activated



Field	Bits	Type	Description
DXMC	2	ROLH	Duplex Mode Change Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of a full or half-duplex change. Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
LSPC	1 She	ROLH	Link Speed Change Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of link speed change.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
LSTC	0	ROLH	Link State Change Interrupt Status When active and masked in IMASK, the MDINT is activated upon detection of link status change.  Constants  0 <sub>B</sub> INACTIVE Interrupt is masked out 1 <sub>B</sub> ACTIVE Interrupt is activated
			Constants  O <sub>B</sub> INACTIVE Interrupt is masked out  ACTIVE Interrupt is activated
			Signs (NRND)



## **LED Control Register**

This register contains control bits to allow for direct access to the LEDs. A directly controlled LED must disable the integrated LED function as specified by the more sophisticated LED control registers in page LED.

PHY_LED LED Control Register				fset B <sub>H</sub>			Reset Value 0F00 <sub>H</sub>	
15	14	13	12	11	10	9	8	
RESH 🚜	LED2INV	LED1INV	LED0INV	Res	LED2EN	LED1EN	LED0EN	
rw	rw	rw	rw		rw	rw	rw	
7	\sqrt{0}			3	2	1	0	
	COM	RESL	1		LED2DA	LED1DA	LED0DA	
	Q	ro	•	•	rw	rw	rw	

		Tuno	Old Cr.	rw	rw	rw
Field	Bits	Type	Description			
RESH	15	RW	Reserved Write as zero, ignored on re	ead.		
LED2INV	14	RW	Control LED2 polarity Constants  0 <sub>B</sub> Active High LED2 pin 1 <sub>B</sub> Active Low LED2 pin	-		
LED1INV	13	RW	Control LED1 polarity Constants  0 <sub>B</sub> Active High LED1 pir 1 <sub>B</sub> Active Low LED1 pin			
LEDOINV	12	RW	Control LED0 polarity Constants  0 <sub>B</sub> Active High LED0 pin 1 <sub>B</sub> Active Low LED0 pin			
LED2EN	10	RW	Enable the integrated fund Write a logic 0 to this bit to d for this LED. The LED rema Constants 0 <sub>B</sub> DISABLE Disables the 1 <sub>B</sub> ENABLE Enables the	lisable the pre-co ins off unless dire e integrated LED	ectly accessed function	
LED1EN	9	RW	Enable the Integrated Fun Write a logic 0 to this bit to d for this LED. The LED rema Constants  0 <sub>B</sub> DISABLE Disables the 1 <sub>B</sub> ENABLE Enables the	lisable the pre-co ins off unless dire e integrated LED	ectly accessed function	



Field	Bits	Type	Description
LED0EN	8	RW	Enable the Integrated Function of LED0 Write a logic 0 to this bit to disable the pre-configured integrated function for this LED. The LED remains off unless directly accessed via LED0DA. Constants  0 <sub>B</sub> DISABLE Disables the integrated LED function 1 <sub>B</sub> ENABLE Enables the integrated LED function
RESL	7:3	RO	Reserved Write as zero, ignored on read.
LED2DA	2 5/100 1	RW	Direct Access to LED2 Write a logic 1 to this bit to illuminate the LED. Note that LED2EN must be set to logic zero. Constants  0 <sub>B</sub> OFF Switch off the LED 1 <sub>B</sub> ON Switch on the LED
LED1DA	1	RW	Direct Access to LED1 Write a logic 1 to this bit to illuminate the LED. Note that LED1EN must be set to logic zero. Constants  0 <sub>B</sub> OFF Switch off the LED 1 <sub>B</sub> ON Switch on the LED
LED0DA	0	RW	Direct Access to LED0  Write a logic 1 to this bit to illuminate the LED. Note that LED0EN must be set to logic zero.  Constants  0 <sub>B</sub> OFF Switch off the LED  1 <sub>B</sub> ON Switch on the LED
			write a logic 1 to this bit to illuminate the LED. Note that LEDUEN must be set to logic zero.  Constants  0 <sub>B</sub> OFF Switch off the LED  1 <sub>B</sub> ON Switch on the LED



## **Test-Packet Generator Control**

This register controls the operation of the integrated Test-Packet Generator (TPG). Note that this module is only used for testing purposes.

PHY_TPGCTRL  Test-Packet Generator Control				fset C <sub>H</sub>			Reset Value 0000 <sub>H</sub>
15	14	13	12	11	10	9	8
RE	RESH1 MOD		RESH0	IPGL		TYPE	
9	rw		ro	rw		rw	
7	<b>S</b> 6	<u>}</u>	4	3	2	1	0
RESL1	COX	SIZE		RE	SL0	START	EN
ro	•	rw		r	O	rw	rw

ro		rw	ro rw rw
		No.	They are the second of the sec
Field	Bits	Туре	Description
CHSEL	15:14	RW	Channel Selection There are 4 channels in the IP which can be selected for debug data dumping. Note that this field is not used in case BURST4EN=1 && MOPT=1 (auto-channel burst).  Constants  00 <sub>B</sub> CHA Channel A is selected  01 <sub>B</sub> CHB Channel B is selected  10 <sub>B</sub> CHC Channel C is selected  11 <sub>B</sub> CHD Channel D is selected
MODE	13	RW	Mode of the TPG Configures the packet generation mode Constants  0 <sub>B</sub> CONTINUOUS Send packets continuously 1 <sub>B</sub> SINGLE Send a single packet. Also used to send a single burst of 4 packets in debug dumping when selected.
BURST4EN	12	RW	Burst Of 4 packets Enable  When Enabled, this indicates to the packet generator to auto-select based on MOPT the debug data configuration per packet in the burst of 4. when MOPT=0, then the packets will be generated capturing for the selected ASP channel, the polyphases 0,1,2,3 respectively.  When MOPT=1, then the packets will be generated capturing for the selected DVC option, the channels A,B,C,D respectively.  Note that this will lead to a burst of 4 packets if MODE=SINGLE. In case MODE=1(continuous), then we will get packets where every group of 4 packets are generated according to the MOPT selection.  Constants  0 <sub>B</sub> DISABLE Disable  1 <sub>B</sub> ENABLE Enable Burst of 4 packet generation



Field	Bits	Type	Description
IPGL	11:10	RW	Inter-Packet Gap Length Configures the length of the inter-packet gap in bit times.  Constants  00 <sub>B</sub> BT48 Length is 48 bit times  01 <sub>B</sub> BT96 Length is 96 bit times  10 <sub>B</sub> BT960 Length is 960 bit times  11 <sub>B</sub> BT9600 Length is 9600 bit times
TYPE	9:8 Sheet	RW	Packet Data Type Configures the packet data type to be either predefined, byte increment or random. If pre-defined, the content of the register TPGDATA is used repetitively.  Constants  00 <sub>B</sub> RANDOM Use random data as the packet content  01 <sub>B</sub> BYTEINC Use byte increment as the packet content  10 <sub>B</sub> PREDEF Use pre-defined content of the register TPGDATA  DBGDATA Use Dbg data as packet content. Additional  Configuration will be taken from TPGDATA
RESL1	7	RO	Reserved. Write as zero, ignore on read.
SIZE	6:4	RW	Packet Size Configures the size of the generated Ethernet packets in bytes. The size includes DA, SA, length/type, payload and FCS. Constants  000 <sub>B</sub> L64 Packet length is 64 bytes.  001 <sub>B</sub> L2048 Packet length is 2048 bytes (jumbo frames).  010 <sub>B</sub> L256 Packet length is 256 bytes.  011 <sub>B</sub> L4096 Packet length is 4096 bytes (jumbo frames).  100 <sub>B</sub> L1024 Packet length is 1024 bytes.  101 <sub>B</sub> L1518 Packet length is 1518 bytes.  110 <sub>B</sub> L9000 Packet length is 9000 bytes (jumbo frames).  111 <sub>B</sub> RANDOM Packet length is randomized between upper sizes without jumbo frames.
MOPT	3:2	RW	Mux Option Additional Mux Selection Options depending on the value of DVC in TPGDATA[3:0] Constants  00 <sub>B</sub> MOPT0 BURST4EN=1: auto-polyphase selected, BURST4EN=0 && DVC=0b1001: DBG SYNC Data Gen, otherwise sub-DVC-mode selection  01 <sub>B</sub> MOPT1 BURST4EN=1: auto-channel selected, BURST4EN=0 && DVC=0b1001: DBG Trace Data, otherwise sub-DVC-mode selection  10 <sub>B</sub> MOPT2 sub-DVC-mode selection  11 <sub>B</sub> MOPT3 sub-DVC-mode selection



START	Bits	Type	Description
0174(1	1	RW	Start or Stop TPG Data Generation. Starts the TPG data generation. Depending on the MODE, the TPG
			sends only 1 single packet or chunks of 10,000 packets until stopped.  Constants
			1 <sub>B</sub> START Starts the TPG data generation
ΞN	0	RW	Enable the TPG
			Enables the TPG for data generation.
	25		Constants
	9/3		0 <sub>B</sub> <b>DISABLE</b> Disables the TPG
		<i>&gt;</i>	1 <sub>B</sub> <b>ENABLE</b> Enables the TPG
			OB STOP Stops the TPG data generation  Brable the TPG Enables the TPG for data generation.  Constants  OB DISABLE Disables the TPG  BNABLE Enables the TPG  ENABLE Enables the TPG  CONSTANTANDON  CONSTA



#### **Test-Packet Generator Data**

Specifies the payload data to be used when sending a non-random data packet. All payload data bytes are sent with this value.

PHY_TPGDATA  Test-Packet Generator Data		Off	set		Reset Value	
		1D <sub>H</sub>			00AA <sub>H</sub>	
15		12	11		8	
0/.	DA	'	'	SA	'	
	rw		l I	rw		
7					0	
'	COT OF	DA	TA	'	'	
	9/0 00/	n	N			

Field	Bits	Type	Description
DA	15:12	RW	<b>Destination Address</b> Configures the destination address nibble. The Source Address builds up to 00-03-19-FF-FF-F[DA].
SA	11:8	RW	Source Address Configures the source address nibble. The source address builds up to 00-03-19-FF-FF-F[SA].
DATA	7:0	RW	Data Byte to be Transmitted  This is the content of the payload bytes in the frame.
			This is the content of the payload bytes in the frame.



#### **Firmware Version Register**

This register contains the version of the PHY firmware.

PHY_FWV Firmware Version Register		Offset	Reset Value
		1E <sub>H</sub>	8435 <sub>H</sub>
15	14		8
REL		MAJOR	'
ro 💘	)	ro	1
7	6		0
	she he	MINOR	
	(A)	ro	

Field	Bits	Type	Description
REL	15	RO	Release Indication This parameter indicates either a test or a release version.  Constants  0 <sub>B</sub> TEST Indicates a test version 1 <sub>B</sub> RELEASE Indicates a released version
MAJOR	14:8	RO	Major Version Number Specifies the main version release number of the firmware.
MINOR	7:0	RO	Minor Version Number Specifies the sub-version release number of the firmware.
			Specifies the sub-version release number of the firmware.



#### Reserved

Reserved for future use.

PHY_RES1F	Offset	Reset Value
Reserved	1F <sub>H</sub>	0000 <sub>H</sub>
15		8
·	RES	
<b>%</b>	ro	
7		0
she he	RES	
Of Pro	ro	

		0/1	40
Field	Bits	Type	Description
RES	15:0	RO	Reserved
			Write as zero, ignored on read.
			Reserved Write as zero, ignored on read.



# 5 MMD Registers

This chapter defines all the registers needed to operate the module "MMD\_REGISTERS".<sup>1)</sup>

Table 36 Registers Address Space

Module	Base Address	End Address	Note
MMD_REGISTERS	000000 <sub>H</sub>	1FFFFF <sub>H</sub>	

Table 37	Registers	Overview
i abie 37	Redisters	Overview

Register Short Name	Register Long Name	Offset Address	Page Number
MMD Registers, EEE: S	tandard EEE Registers for MMD=0x03		
EEE_CTRL1	EEE Control Register 1	03.0000 <sub>H</sub>	133
EEE_STAT1	EEE Status Register 1	03.0001 <sub>H</sub>	134
EEE_CAP	EEE Capability Register	03.0014 <sub>H</sub>	135
EEE_WAKERR	EEE Wake Time Fault Count Register 1	03.0016 <sub>H</sub>	136
MMD Registers, ANEG:	Standard Auto-Negotiation Registers for MMD=	0x07	
EEE_AN_ADV	EEE Auto-Negotiation Advertisement Register	07.003C <sub>H</sub>	137
EEE_AN_LPADV	EEE Auto-Negotiation Link-Partner Advertisement Register	07.003D <sub>H</sub>	138
MMD Registers, EEPRO	M: EEPROM Address Space (MMD=0x1E)		
EEPROM	EEPROM Content	1E.0000 <sub>H</sub> - 1EFFFF <sub>H</sub>	140
MMD Registers, INTERN	IAL: Internal Address Space (MMD=0x1F)		,
LEDCH	LED Configuration	1F.01E0 <sub>H</sub>	141
LEDCL	LED Configuration	1F.01E1 <sub>H</sub>	143
LED0H	Configuration for LED Pin 0	1F.01E2 <sub>H</sub>	145
LED0L	Configuration for LED Pin 0	1F.01E3 <sub>H</sub>	147
EEE_RXERR_LINK_FA IL_H	High Byte of the EEE Link-Fail Counter	1F.01EA <sub>H</sub>	149
EEE_RXERR_LINK_FA	Low Byte of the EEE Link-Fail Counter	1F.01EB <sub>H</sub>	149
WOLCTRL	Wake-On-LAN Control Register	1F.0781 <sub>H</sub>	150
WOLAD0	Wake-On-LAN Address Byte 0	1F.0783 <sub>H</sub>	151
WOLPW0	Wake-On-LAN SecureON Password Byte 0	1F.0789 <sub>H</sub>	152
LED1H	Configuration for LED Pin 1	1F.01E4 <sub>H</sub>	146
LED2H	Configuration for LED Pin 2	1F.01E6 <sub>H</sub>	146
LED1L	Configuration for LED Pin 1	1F.01E5 <sub>H</sub>	148
LED2L	Configuration for LED Pin 2	1F.01E7 <sub>H</sub>	148
WOLAD1	Wake-On-LAN Address Byte 1	1F.0784 <sub>H</sub>	151
WOLAD2	Wake-On-LAN Address Byte 2	1F.0785 <sub>H</sub>	151

<sup>1)</sup> Generated by REFIGE v1.4 - Beta Release XIV



Table 37 Registers Overview (cont'd)

Register Short Name	Register Long Name	Offset Address	Page Number
WOLAD3	Wake-On-LAN Address Byte 3	1F.0786 <sub>H</sub>	151
WOLAD4	Wake-On-LAN Address Byte 4	1F.0787 <sub>H</sub>	151
WOLAD5	Wake-On-LAN Address Byte 5	1F.0788 <sub>H</sub>	151
WOLPW1	Wake-On-LAN SecureON Password Byte 1	1F.078A <sub>H</sub>	152
WOLPW2	Wake-On-LAN SecureON Password Byte 2	1F.078B <sub>H</sub>	152
WOLPW3	Wake-On-LAN SecureON Password Byte 3	1F.078C <sub>H</sub>	152
WOLPW4	Wake-On-LAN SecureON Password Byte 4	1F.078D <sub>H</sub>	152
WOLPW5	Wake-On-LAN SecureON Password Byte 5	1F.078E <sub>H</sub>	152

The register is addressed wordwise.

Table 38 Register Access Types

Symbol
ROLH
ROLL
ROSC
RW
RWSC
RO
ned in this Openion (NAND)




# 5.1 EEE: Standard EEE Registers for MMD=0x03

This section describes the EEE registers for MMD device 0x03.

#### **EEE Control Register 1**

EEE Control Register 1.

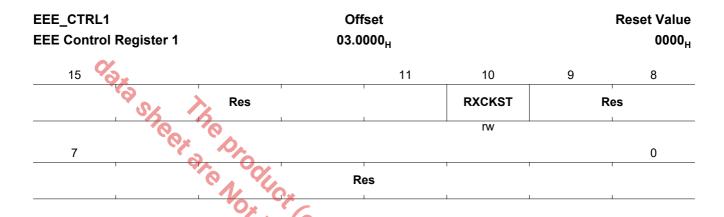

Field	Bits	Туре	Description
RXCKST	10	RW	Receive Clock Stoppable The MAC can set this bit to active to allow the PHY to stop the clocking during the LPI_MODE.  Constants  0 <sub>B</sub> DISABLE The PHY must not stop the xMII clock during LPI_MODE  1 <sub>B</sub> ENABLE The PHY can stop the xMII clock during LPI_MODE
			New Designs (NRND)



# **EEE Status Register 1**

EEE Status Register 1.

EEE_STAT1 EEE Status Register 1			Offset 03.0001 <sub>H</sub>				Reset Value 0000 <sub>H</sub>	
15			12	11	10	9	8	
	R	es	'	TXLPI_RCVD	RXLPI_RCVD	TXLPI_IND	RXLPI_IND	
9	) <u>.</u>	I	1	rolh	rolh	ro	ro	
7	6	5					0	
Res	TXCKST	So.	'	R	es		1	
	ro	roppo	4					
Field	Bits	Туре	Description					

	1 10 10 10 10 10 10 10 10 10 10 10 10 10				
Field	Bits	Type	Description		
TXLPI_RCVD	11	ROLH 4	TXLPI Has Been Received  Constants  0 <sub>B</sub> INACTIVE LPI has not been received  1 <sub>B</sub> ACTIVE LPI has been received		
RXLPI_RCVD	10	ROLH	RXLPI Has Been Received  Constants  0 <sub>B</sub> INACTIVE LPI has not been received  1 <sub>B</sub> ACTIVE LPI has been received		
TXLPI_IND	9	RO	TXLPI Indication  Constants  0 <sub>B</sub> INACTIVE LPI is currently inactive  1 <sub>B</sub> ACTIVE LPI is currently active		
RXLPI_IND	8	RO	RXLPI Has Been Received Constants  0 <sub>B</sub> INACTIVE LPI is currently inactive 1 <sub>B</sub> ACTIVE LPI is currently active		
TXCKST	6	RO	Transmit Clock Stoppable Indicate whether PHY is able to accept a stopped transmit clock during LPI_MODE. MAC may choose to stop the clocking during LPI_MODE if this bit is set to active.  Constants  0 <sub>B</sub> DISABLE The PHY is not able to accept stopped transmit clocks(default)  1 <sub>B</sub> ENABLE The PHY is able to accept a stopped transmit clock during LPI_MODE		



# **EEE Capability Register**

This register is used to indicate the capability of the PCS to support EEE functions for each PHY type.

EEE_CAP Of				set	Reset Value			
EEE Capabil	ity Registe	er		03.0	014 <sub>H</sub>			0006 <sub>H</sub>
15								8
				R	es			
7	<b>6</b> 6		5	4	3	2	1	0
Res	100	3KR	-	EEE_1000BK X	_	_	EEE_100BTX	Res
	ro	0	ro	ro	ro	ro	ro	

	ro o	Type	ro ro ro
Field	Bits	Туре	Description
EEE_10GBKR	6	RO	Support of 10GBASE-KR EEE  Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE  1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_10GBKX 4	5	RO	Support of 10GBASE-KX4 EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_1000BK X	4	RO	Support of 1000BASE-KX EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_10GBT	3	RO	Support of 10GBASE-T EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_1000BT	2	RO	Support of 1000BASE-T EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE  1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_100BTX	1	RO	Support of 100BASE-TX EEE Constants 0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE



# **EEE Wake Time Fault Count Register 1**

EEE Wake Time Fault Count Register.

EEE_WAKERR	Offset	Reset Value	
EEE Wake Time Fault Count Register 1	03.0016 <sub>H</sub>	0000 <sub>H</sub>	
15		8	
	ERRCNT		
%.	ro		
7		0	
she he	ERRCNT		
C. Pr	ro		

Field	Bits	Type	Description
ERRCNT	15:0	RO	TXLPI Has Been Received This register is used by PHY types that support EEE to count wake time faults where the PHY fails to complete its normal wake sequence within the time required for the specific PHY type. The definition of the fault event to be counted is defined for each PHY and may occur during a refresh or a wake-up as defined by the PHY. This 16-bit counter is reset to all zeroes when the EEE wake error counter is read by the management function or upon execution of the PCS reset. It is held at all ones in case of overflow.



0/

**MMD Registers** 

# 5.2 ANEG: Standard Auto-Negotiation Registers for MMD=0x07

This register file contains the auto-negotiation registers for MMD device 0x07 (only supporting EEE specifics).

#### **EEE Auto-Negotiation Advertisement Register**

This register defines the EEE advertisement that is sent in the unformatted next page following an EEE technology message code as defined in 28C.12. The 11 bits (7.60.10 to 7.60.0) in the EEE advertisement register correspond to the bits in the unformatted next page. For PHYs that negotiate extended next-page support, the 11 bits (7.60.10 to 7.60.0) in the EEE advertisement register correspond to bits U10 to U0 respectively of the extended next-page unformatted code field.

EEE_AN_AD	•		Off				Reset Value
EEE Auto-Ne	gotiation Adv	ertisement	07.0	03C <sub>H</sub>			0000 <sub>H</sub>
Register	0	0					
	C) x	DA					
15	Q.	0					8
	1	e No life	R	es			
7	6	5	40	3	2	1	0
Res	EEE_10GBKR	EEE_10GBKX 4	EEE 1000BK	EEE_10GBT	EEE_1000BT	EEE_100BTX	Res
	ro	ro	ro	<b>O</b> ro	rw	rw	

Field	Bits	Туре	Description
EEE_10GBKR	6	RO	Support of 10GBASE-KR EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_10GBKX 4	5	RO	Support of 10GBASE-KX4 EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_1000BK X	4	RO	Support of 1000BASE-KX EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_10GBT	3	RO	Support of 10GBASE-T EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE
EEE_1000BT	2	RW	Support of 1000BASE-T EEE Constants  0 <sub>B</sub> DISABLED This PHY mode is not supported for EEE 1 <sub>B</sub> ENABLE This PHY mode is supported for EEE



Field	Bits	Туре	Description
EEE_100BTX	1	RW	Support of 100BASE-TX EEE
			Constants
			0 <sub>B</sub> <b>DISABLED</b> This PHY mode is not supported for EEE
			1 <sub>B</sub> <b>ENABLE</b> This PHY mode is supported for EEE

#### **EEE Auto-Negotiation Link-Partner Advertisement Register**

All of the bits in the EEE LP advertisement register are read only. A write operation to the EEE LP advertisement register has no effect. After the AN process has been completed, this register reflects the contents of the link partner's EEE advertisement register. The definitions are the same as for the EEE AN advertisement register.

EEE_AN_LPA EEE Auto-Ne Advertiseme	egotiation Lin	k-Partner	Offse 07.003				Reset Value 0000 <sub>H</sub>
15	<u> </u>	CA OU					8
	1	0,0	Res	<b>i</b>			
7	6	5	0,40	3	2	1	0
Res	EEE_10GBKR	EEE_10GBKX	EEE_1000BK	EEE_10GBT	EEE_1000BT	EEE_100BTX	Res
	ro	ro	ro	ro	ro	ro	

	ro	ro	Description ro ro
Field	Bits	Туре	Description
EEE_10GBKR	0	RO	Support of 10GBASE-KR EEE Constants
			0 <sub>B</sub> <b>DISABLED</b> This PHY mode is not supported for EEE
			1 <sub>B</sub> <b>ENABLE</b> This PHY mode is supported for EEE
EEE_10GBKX	5	RO	Support of 10GBASE-KX4 EEE
4			Constants
			0 <sub>B</sub> <b>DISABLED</b> This PHY mode is not supported for EEE
			1 <sub>B</sub> <b>ENABLE</b> This PHY mode is supported for EEE
EEE_1000BK	4	RO	Support of 1000BASE-KX EEE
X			Constants  0 <sub>R</sub> DISABLED This PHY mode is not supported for EEE
			<ul> <li>0<sub>B</sub> DISABLED This PHY mode is not supported for EEE</li> <li>1<sub>B</sub> ENABLE This PHY mode is supported for EEE</li> </ul>
EEE 10CBT	3	RO	
EEE_10GBT	3	KO	Support of 10GBASE-T EEE Constants
			0 <sub>B</sub> <b>DISABLED</b> This PHY mode is not supported for EEE
			1 <sub>B</sub> <b>ENABLE</b> This PHY mode is supported for EEE
EEE_1000BT	2	RO	Support of 1000BASE-T EEE
			Constants
			0 <sub>B</sub> <b>DISABLED</b> This PHY mode is not supported for EEE
-			1 <sub>B</sub> <b>ENABLE</b> This PHY mode is supported for EEE



Field	Bits	Туре	Description
EEE_100BTX	1	RO	Support of 100BASE-TX EEE
			Constants
			0 <sub>B</sub> <b>DISABLED</b> This PHY mode is not supported for EEE
			1 <sub>B</sub> <b>ENABLE</b> This PHY mode is supported for EEE

data sheer are Nor Recommended for Nentioned in this signs (NRND)




## 5.3 EEPROM: EEPROM Address Space (MMD=0x1E)

This register file contains the EEPROM address space (MMD=0x1E).

#### **EEPROM Content (Memory)**

The EEPROM is indirectly addressable via MMD 0x1E.

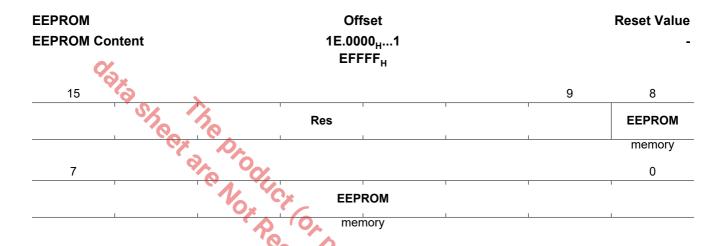

Field	Bits	Type	Description
EEPROM	8:0	Memory	EEPROM Content
			The EEPROM is indirectly addressable via MMD 0x1E.
			Por New Designs
			(NRNO)




## 5.4 INTERNAL: Internal Address Space (MMD=0x1F)

This register file contains the PHY internal address space (MMD=0x1F).

#### **LED Configuration**

This register must be used to configure the complex functions of the LED behavior. Complex functions are of a higher priority than direct LED functions as of registers MMD.INTERNAL.LEDxH/L. When the PHY enters a state which is defined to activate complex LED functions, all LEDs are controlled according to the type of the complex function.

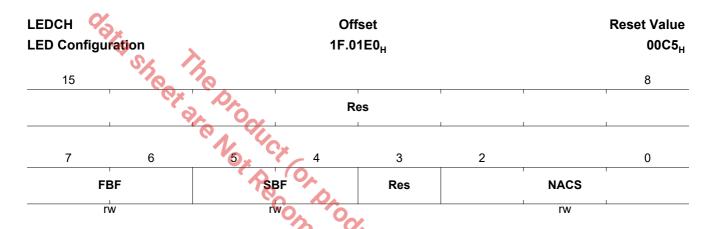

Field	Bits	Type	Description
FBF	7:6	RW	Fast Blink Frequency This register must be used to configure the fast-blinking frequency. Note that this setting implicitly defines the pulse-stretching width.  Constants  00 <sub>B</sub> F02HZ 2 Hz blinking frequency 01 <sub>B</sub> F04HZ 4 Hz blinking frequency 10 <sub>B</sub> F08HZ 8 Hz blinking frequency 11 <sub>B</sub> F16HZ 16 Hz blinking frequency
SBF	5:4	RW	Slow Blink Frequency This register must be used to configure the slow-blinking frequency.  Constants  00 <sub>B</sub> F02HZ 2 Hz blinking frequency  01 <sub>B</sub> F04HZ 4 Hz blinking frequency  10 <sub>B</sub> F08HZ 8 Hz blinking frequency  11 <sub>B</sub> F16HZ 16 Hz blinking frequency



Field	Bits	Type	Description
NACS	2:0	RW	Inverse of SCAN Function This configuration defines in which state the "complex SCAN" should be
			activated. The complex SCAN performs running off which turns back and
			forth between the first and last LED. The speed is dependent on the
			MMD.INTERNAL.LEDCH.FBF setting.  Constants
			000 <sub>B</sub> <b>NONE</b> No Function
			001 <sub>B</sub> <b>LINK</b> Complex function enabled when link is up
Ç	<b>%</b>		010 <sub>B</sub> <b>PDOWN</b> Complex function enabled when device is powered-down 011 <sub>B</sub> <b>EEE</b> Complex function enabled when device is in EEE mode
		<b>X</b>	100 <sub>B</sub> <b>ANEG</b> Complex function enabled when auto-negotiation is running
	0.70	1	101 <sub>B</sub> <b>ABIST</b> Complex function enabled when analog self-test is running
	(e)		110 <sub>B</sub> <b>CDIAG</b> Complex function enabled when cable diagnostics are
		0	111 <sub>B</sub> <b>TEST</b> Complex function enabled when test mode is running
			MMD.INTERNAL.LEDCH.FBF setting.  Constants  000 <sub>B</sub> NONE No Function  001 <sub>B</sub> LINK Complex function enabled when link is up  010 <sub>B</sub> PDOWN Complex function enabled when device is powered-down  011 <sub>B</sub> EEE Complex function enabled when device is in EEE mode  100 <sub>B</sub> ANEG Complex function enabled when auto-negotiation is running  101 <sub>B</sub> ABIST Complex function enabled when analog self-test is running  110 <sub>B</sub> CDIAG Complex function enabled when cable diagnostics are running  111 <sub>B</sub> TEST Complex function enabled when test mode is running
			Donne



## **LED Configuration**

The register must be used to configure the complex functions of the LED behavior. Complex functions are of a higher priority than direct LED functions as of registers MMD.INTERNAL.LEDxH/L. When the PHY enters a state which is defined to activate complex LED functions all LEDs are controlled according to the type of the complex function.

LEDCL		Of	fset	Reset Value		
LED Configur	ation	1F.0	)1E1 <sub>H</sub>	0067 <sub>H</sub>		
15						8
	\$ >	F	Res			
7	607 0	4	3	2	,	0
Res	SCAN		Res		CBLINK	
	rw	*		1	rw	

		<b>10</b>	Per Copy
Field	Bits	Туре	Description
SCAN	6:4	RW	Complex SCAN Configuration This configuration defines in which state the "complex SCAN" should be activated. The complex SCAN performs running on which turns back and forth between the first and last LED. The speed is dependent on the MMD.INTERNAL.LEDCH.FBF setting.  Constants  000 <sub>B</sub> NONE No Function  001 <sub>B</sub> LINK Complex function enabled when link is up  010 <sub>B</sub> PDOWN Complex function enabled when device is powered-down  011 <sub>B</sub> EEE Complex function enabled when device is in EEE mode  100 <sub>B</sub> ANEG Complex function enabled when auto-negotiation is running  101 <sub>B</sub> ABIST Complex function enabled when analog self-test is running  110 <sub>B</sub> CDIAG Complex function enabled when cable diagnostics are running
			111 <sub>B</sub> <b>TEST</b> Complex function enabled when test mode is running



Bits	Туре	Description
2:0	Type RW	Complex Blinking Configuration This configuration defines in which state the "complex blinking" should be activated. The complex blinking performs a blinking at the fast-blinking frequency on all LEDs simultaneously. This function can be used to indicate a special mode of the PHY such as cable-diagnostics or test. The speed is dependent on the MMD.INTERNAL.LEDCH.FBF setting.  Constants  000 <sub>B</sub> NONE No Function  001 <sub>B</sub> LINK Complex function enabled when link is up  010 <sub>B</sub> PDOWN Complex function enabled when device is powered-down  011 <sub>B</sub> EEE Complex function enabled when auto-negotiation is running  101 <sub>B</sub> ANEG Complex function enabled when analog self-test is running  110 <sub>B</sub> CDIAG Complex function enabled when cable diagnostics are running  111 <sub>B</sub> TEST Complex function enabled when test mode is running
	2:0	2:0 RW



# Configuration for LED Pin 0

This register configures the behavior of the LED depending on pre-defined states or events the PHY has entered into or raised. Since more than one event/state can be active at the same time, more than one function might apply simultaneously. The priority from highest to lowest is given by the order PULSE, BLINKS, BLINKF, CON.

LED0H Configuration for LED Pin 0		fset 1E2 <sub>H</sub>		Reset Value 0070 <sub>H</sub>
15				8
Q <sub>Q</sub>	R	es		'
7 She The	4	3	,	0
CON	Pro		BLINKF	
rw	OF DO		rw	,

Field	Bits	Туре	Description
CON	7:4	RW	Constant On Configuration
			The Constant-ON field selects in which PHY states the LED is constantly
			on.
			Constants
			0000 <sub>B</sub> NONE LED does not light up constantly
			0001 <sub>B</sub> <b>LINK10</b> LED is on when link is 10 Mbit/s
			0010 <sub>B</sub> <b>LINK100</b> LED is on when link is 100 Mbit/s
			0011 <sub>B</sub> <b>LINK10X</b> LED is on when link is 10/100 Mbit/s
			0100 <sub>B</sub> <b>LINK1000</b> LED is on when link is 1000 Mbit/s
			0101 <sub>B</sub> <b>LINK10_0</b> LED is on when link is 10/1000 Mbit/s
			0110 <sub>B</sub> <b>LINK100X</b> LED is on when link is 100/1000 Mbit/s
			0111 <sub>B</sub> LINK10XX LED is on when link is 10/100/1000 Mbit/s
			1000 <sub>B</sub> <b>PDOWN</b> LED is on when device is powered-down
			1001 <sub>B</sub> EEE LED is on when device is in EEE mode
			1010 <sub>B</sub> ANEG LED is on when auto-negotiation is running
			1011 <sub>B</sub> <b>ABIST</b> LED is on when analog self-test is running
			1100 <sub>B</sub> CDIAG LED is on when cable diagnostics are running
			1101 <sub>B</sub> COPPER LED is on when the COPPER interface is selected
			1110 <sub>B</sub> FIBER LED is on when the FIBER or an interface other than copper
			is selected
			1111 <sub>B</sub> RESERVED Reserved for future use



Field	Bits	Туре	Description
BLINKF	3:0	RW	Fast Blinking Configuration
			The Blink-F Field selects in which PHY states the LED blinks with the pre-
			defined fast frequency.
			Constants
			0000 <sub>B</sub> NONE No Blinking
			0001 <sub>B</sub> <b>LINK10</b> Blink when link is 10 Mbit/s
			0010 <sub>B</sub> <b>LINK100</b> Blink when link is 100 Mbit/s
			0011 <sub>B</sub> LINK10X Blink when link is 10/100 Mbit/s
0			0100 <sub>B</sub> <b>LINK1000</b> Blink when link is 1000 Mbit/s
Y	O'X		0101 <sub>B</sub> <b>LINK10_0</b> Blink when link is 10/1000 Mbit/s
	.6)	<b>X</b>	0110 <sub>B</sub> LINK100X Blink when link is 100/1000 Mbit/s
	0%	16-	0111 <sub>B</sub> <b>LINK10XX</b> Blink when link is 10/100/1000 Mbit/s
	100	. 10	1000 <sub>B</sub> <b>PDOWN</b> Blink when device is powered-down
	· ·	10h	1001 <sub>B</sub> EEE Blink when device is in EEE mode
		8/2	1010 <sub>B</sub> <b>ANEG</b> Blink when auto-negotiation is running
		<b>1</b>	1011 <sub>B</sub> <b>ABIST</b> Blink when analog self-test is running
		TO,	1100 <sub>B</sub> CDIAG Blink when cable diagnostics are running

### **Similar Registers**

The following registers are identical to the Register LEDOH defined above.

Table 39 Similar Registers

Register Short Name	Register Long Name	Offset Address	Reset Value
LED1H	Configuration for LED Pin 1	1F.01E4 <sub>H</sub>	0020 <sub>H</sub>
LED2H	Configuration for LED Pin 2	1F.01E6 <sub>H</sub>	0040 <sub>H</sub>
	New	ned in this osions (NAND)	



### Configuration for LED Pin 0

This register configures the behavior of the LED depending on pre-defined states or events the PHY has entered into or raised. Since more than one event or state can be active at the same time, more than one function might apply simultaneously. The priority from highest to lowest is given by the order PULSE, BLINKS, BLINKF, CON.

LED0L Configuration for LED Pin 0		Offset 1F.01E3 <sub>H</sub>			Reset Value 0003 <sub>H</sub>
15		,			8
	*	R	es		
7	she the	4	3		0
'	BLINKS	1		PULSE	ı
	rwQ		1	rw	

Field	Bits	Туре	Description
BLINKS	7:4	RW	Slow Blinking Configuration  The Blink-S field selects in which PHY states the LED blinks with the predefined slow frequency.  Constants  0000 <sub>B</sub> NONE No Blinking  0001 <sub>B</sub> LINK10 Blink when link is 10 Mbit/s  0010 <sub>B</sub> LINK100 Blink when link is 100 Mbit/s  0011 <sub>B</sub> LINK10X Blink when link is 10/100 Mbit/s  0100 <sub>B</sub> LINK1000 Blink when link is 10/00 Mbit/s  0101 <sub>B</sub> LINK10_0 Blink when link is 10/1000 Mbit/s  0110 <sub>B</sub> LINK100X Blink when link is 10/1000 Mbit/s  0111 <sub>B</sub> LINK10XX Blink when link is 10/100/1000 Mbit/s  1000 <sub>B</sub> PDOWN Blink when device is powered-down  1001 <sub>B</sub> EEE Blink when device is in EEE mode  1010 <sub>B</sub> ANEG Blink when auto-negotiation is running  1011 <sub>B</sub> ABIST Blink when cable diagnostics are running
PULSE	3:0	RW	Pulsing Configuration The pulse field is a mask field by which certain events can be combined, e.g. TXACT RXACT, to generate a pulse on the LED in case such an event has been detected.  Constants  0000 <sub>B</sub> NONE No pulsing  0001 <sub>B</sub> TXACT Transmit activity  0100 <sub>B</sub> RXACT Receive activity  0100 <sub>B</sub> COL Collision  1000 <sub>B</sub> RES Reserved



#### **Similar Registers**

The following registers are identical to the Register LED0L defined above.

Table 40 **Similar Registers** 


Register Short Name	Register Long Name	Offset Address	Reset Value
LED1L	Configuration for LED Pin 1	1F.01E5 <sub>H</sub>	0000 <sub>H</sub>
LED2L	Configuration for LED Pin 2	1F.01E7 <sub>H</sub>	0000 <sub>H</sub>

Control of the Droduct of Products of North Recommended for North Resigns (NAND)



# High Byte of the EEE Link-Fail Counter


High Byte of the EEE Link-Fail Counter.

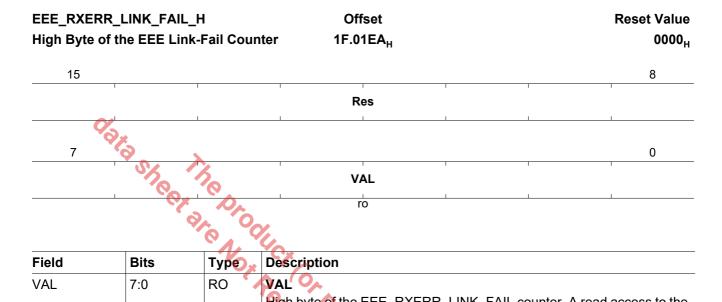

Field	Bits	Type	Description
VAL	7:0		WAL High byte of the EEE_RXERR_LINK_FAIL counter. A read access to the low byte also clears the high byte of this counter.

#### Low Byte of the EEE Link-Fail Counter

Low Byte of the EEE Link-Fail Counter.

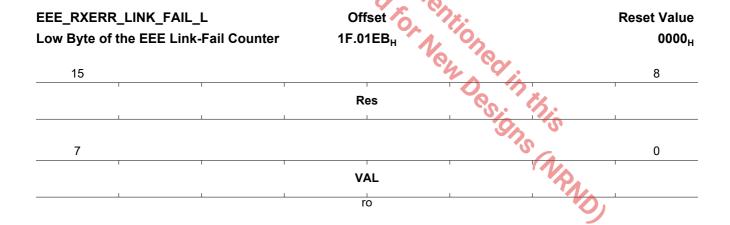

Field	Bits	Туре	Description
VAL	7:0	RO	VAL
			Low byte of the EEE_RXERR_LINK_FAIL counter. A read access to this
			byte also clears the high byte of this counter.



# Wake-On-LAN Control Register

Wake-On-LAN Control Register.


WOLCTRL Wake-On-LAN Control Register	Offset 1F.0781 <sub>H</sub>			Reset Value 0000 <sub>H</sub>	
Wake-Oil-LAN Control Register	11.0701 <sub>H</sub>			ООООН	
15				8	
	Res				
00*	1				
7	3	2	1	0	
Res	,	SPWD_EN	RES	EN	
V Pro	<u> </u>	rw	ro	rw	

			rw ro rw
		Sto V	
Field	Bits	Type	Description
SPWD_EN	2	RW	Secure-ON Password Enable If enabled, checks for the Secure-ON password after the 16 MAC address repetitions. Constants  0 <sub>B</sub> DISABLED Secure-On password check is disabled 1 <sub>B</sub> ENABLED Secure-On password check is enabled
RES	1	RO	Reserved Must always be written to zero!
EN	0	RW	Enables the Wake-On-LAN functionality  If Wake-On-LAN is enabled, the PHY scans for the configured magic packet and indicates its reception via the register bit ISTAT.WOL, and optionally also via interrupt.  Constants  0 <sub>B</sub> DISABLED Wake-On-LAN functionality is disabled  1 <sub>B</sub> ENABLED Wake-On-LAN functionality is enabled



### Wake-On-LAN Address Byte 0

Wake-On-LAN Address Byte 0.

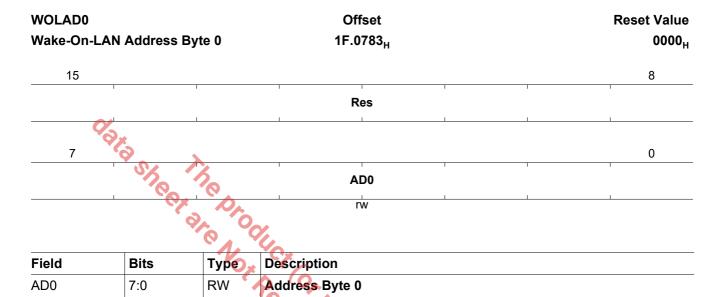

Field	Bits	Type Description
AD0	7:0	RW Address Byte 0 Defines byte 0 of the WOL-designated MAC address to which the PHY is sensitive.

Similar Registers

The following registers are identical to the Register WOLADO defined above.


Table 41 **Similar Registers** 

Register Short Name	Register Long Name	1,0	Offset Address	Reset Value
WOLAD1	Wake-On-LAN Address Byte 1	0,	1F.0784 <sub>H</sub>	0000 <sub>H</sub>
WOLAD2	Wake-On-LAN Address Byte 2	7	1F.0785 <sub>H</sub>	0000 <sub>H</sub>
WOLAD3	Wake-On-LAN Address Byte 3	Q	1F.0786 <sub>H</sub>	0000 <sub>H</sub>
WOLAD4	Wake-On-LAN Address Byte 4		1F.0787 <sub>H</sub> S	0000 <sub>H</sub>
WOLAD5	Wake-On-LAN Address Byte 5		1F.0788 <sub>н</sub>	0000 <sub>H</sub>



### Wake-On-LAN SecureON Password Byte 0

Wake-On-LAN SecureON Password Byte 0.

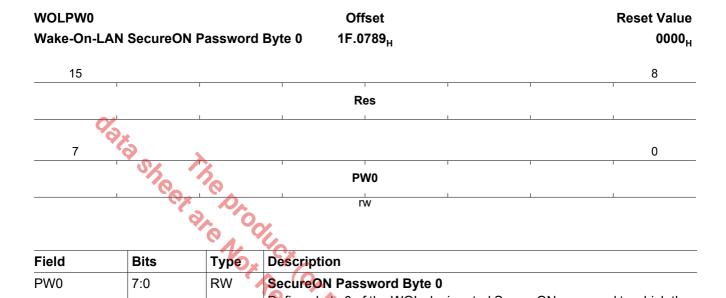

Field	Bits	Type	Description
PW0	7:0	RW	SecureON Password Byte 0 Defines byte 0 of the WOL-designated SecureON password to which the PHY is sensitive.

### **Similar Registers**

The following registers are identical to the Register WOLPWO defined above.

Table 42 **Similar Registers** 

Register Short Name	Register Long Name	Offset Address	Reset Value
WOLPW1	Wake-On-LAN SecureON Password Byte 1	1F.078A <sub>H</sub>	0000 <sub>H</sub>
WOLPW2	Wake-On-LAN SecureON Password Byte 2	1F.078B <sub>H</sub>	0000 <sub>H</sub>
WOLPW3	Wake-On-LAN SecureON Password Byte 3	1F.078C <sub>H</sub>	0000 <sub>H</sub>
WOLPW4	Wake-On-LAN SecureON Password Byte 4	1F.078D <sub>H</sub>	0000 <sub>H</sub>
WOLPW5	Wake-On-LAN SecureON Password Byte 5	1F.078Е <sub>н</sub>	0000 <sub>H</sub>



# 6 Electrical Characteristics

This chapter specifies the electrical characteristics of the GPY111.

# 6.1 Absolute Maximum Ratings

Table 43 shows the absolute maximum ratings for the GPY111.

Attention: Stresses above the maximum values listed in this table may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Attention: Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the device.

Table 43 Absolute Limit Ratings

Parameter	DA	Symbol		Values		Unit	Note /
	00%		Min.	Тур.	Max.		Test Condition
Storage temperature limits	1, 4	T <sub>STG</sub>	-55.0	_	125.0	°C	_
DC voltage limits on pad supp	ly pins	V <sub>DDP</sub>	-0.5	_	4.0	V	_
DC voltage limits on high supp	oly pins	$V_{DDH}$	-0.5	_	4.0	V	_
DC voltage limits on DC/DC s	upply pins	$V_{DDR}$	-0.5	_	4.0	V	_
DC voltage limits on low supp	ly pins	V <sub>DDL</sub>	-0.5	_	1.6	V	_
DC voltage limits on core supp	ply pins	V <sub>DDC</sub>	-0.5	_	1.6	V	_
DC voltage limits on any digita	al pin <sup>1)</sup>	V <sub>DC</sub>	-0.5	<u> </u>	V <sub>DDP</sub> +0.5	V	_
DC current limits on any digita	al input pin	I <sub>DC,digital</sub>	-10.0	70-	10.0	mA	_
DC current limits on DC/DC so	upply pin	I <sub>DC,DC/DC</sub>	-400.0	2%	400.0	mA	_
ESD robustness HBM: 1.5 kΩ	, 100 pF	V <sub>ESD,HBM</sub>	_	V-V	2000.0	V	According to EIA/JESD22-A114-B
ESD robustness		V <sub>ESD,CDM</sub>	_	-	500.0	\ \ \ \ \	According to ESD association standard DS5.3.1 - 1999

<sup>1)</sup> That is, any pin which is not a supply pin of one of the domains:  $V_{DDH}$ ,  $V_{DDL}$ ,  $V_{DDC}$ 



# 6.2 Operating Range

**Table 44** defines the limit values of voltages and temperature that can be applied while still guaranteeing proper operation of the GPY111. As can be seen in the table, the device only needs one power supply, which can be arbitrarily chosen between 2.5 V and 3.3 V. When the optional DC/DC converter is not used, an additional low-voltage supply of 1.0 V is required.

For reliable and stable operation, it is highly recommended to keep the supply voltages as close as possible to the specified nominal voltages, and not approach the minimums specified.

Table 44 Operating Range

Parameter	Symbol	ol Values			Unit	Note /
		Min.	Тур.	Max.		Test Condition
Ambient temperature under bias	T <sub>A</sub>	-40.0	_	85.0	°C	_
Pad supply voltage	V <sub>DDP</sub>	3.14	3.30	3.47	V	3.3 V supply
9, 0		2.37	2.50	2.62	V	2.5 V supply
High supply voltage	V <sub>DDH</sub>	3.14	3.30	3.47	V	3.3 V supply
<b>70</b> *	Ch	2.37	2.50	2.62	V	2.5 V supply
DC/DC supply voltage	V <sub>DDR</sub> O	3.14	3.30	3.47	V	3.3 V supply
	100 K	2.37	2.50	2.62	V	2.5 V supply
Low supply voltage	V <sub>DDL</sub>	0.95	1.00	1.05	V	_
Core supply voltage	V <sub>DDC</sub>	0.95	1.00	1.05	V	_
Ground	V <sub>SS</sub>	0.00	0.00	0.00	V	_

# 6.3 Recommended Operating Conditions

The recommended conditions for typical applications are to use nominal voltages of either 2.5 V or 3.3 V for  $V_{DDP}$ ,  $V_{DDH}$  and  $V_{DDR}$ . **Table 44** shows the supported operating ranges for these typical nominal voltage values.

In order to optimize the overall power consumption of the GPY111, a supply voltage of 2.5 V is recommended. The 3.3 V supply is intended to support legacy systems with only 3.3 V supply lines. At  $V_{DDH}$  = 2.5 V, it is not possible to fulfill the requirements according to the standard specified in IEEE 802.3, clause 14.3.1.2.1 [1], as the peak voltage requirement in 10BASE-T mode is slightly violated due to physical limitations. The timing characteristics specified from this point onwards are only valid for nominal voltages of either 2.5 V or 3.3 V.

## 6.4 Power-Up Sequence

It is recommended that the voltage domains are powered up simultaneously. It is essential that the chip-reset signal be asserted before or simultaneously with the voltage domains power-up, and that this signal remains asserted for as long as specified in the reset AC characteristics in **Chapter 6.6.1**.



### 6.5 DC Characteristics

The following sections describe the DC characteristics of the GPY111 external interfaces.

# 6.5.1 Digital Interfaces

This section describes the DC characteristics of the digital interfaces.

#### 6.5.1.1 GPIO Interfaces

This chapter defines the DC characteristics of the GPIO Interface, consisting of the following interfaces:

- MDIO (MDC, MDIO)
- EEPROM/I<sup>2</sup>C (SCL, SDA)
- Management interrupt (MDINT)
- Clock outputs (CLKOUT)
- Chip reset (RSTN)

The DC characteristics for  $V_{DDP} = 2.5 \text{ V}$  are summarized in **Table 45**.

The DC characteristics for  $V_{DDP} = 3.3 \text{ V}$  are summarized in **Table 46**.

Table 45 DC Characteristics of the GPIO Interfaces (VDDP = 2.5 V)

Parameter	Symbol	Symbol Values				Note /
	· CO ~	Min.	Тур.	Max.		Test Condition
Input high voltage	V <sub>IH</sub>	1.8	_	V <sub>DDP</sub> +0.3	V	_
Input low voltage	V <sub>IL</sub>	0 - K		0.7	V	_
Output high voltage	V <sub>OH</sub>	2.0	<b>^</b> -	_	V	I <sub>OH</sub> = -4 mA
Output low voltage	V <sub>OL</sub>	-0/	· (P)	0.4	V	I <sub>OL</sub> = 4 mA

Table 46 DC Characteristics of the GPIO Interfaces (VDDP = 3.3 V)

Parameter	Symbol		Values	0/,	Unit	Note /
		Min.	Тур.	Max.		Test Condition
Input high voltage	V <sub>IH</sub>	2.3	_	V <sub>DDP</sub> +0.3	V	_
Input low voltage	V <sub>IL</sub>	_	_	0.7	V	_
Output high voltage	V <sub>OH</sub>	2.7	_	- 0	У	I <sub>OH</sub> = -4 mA
Output low voltage	V <sub>OL</sub>	_	_	0.4	V	I <sub>OL</sub> = 4 mA



#### 6.5.1.2 MII Receive Interface

This section defines the DC characteristics of the MII receive interface. Depending on the MII mode, this interface comprises the set of pins RX\_CLK, RXD[3:0], RX\_CTL, and MII\_TXC. The DC characteristics summarized in Table 47 are valid for  $V_{DDP} = 2.5 \text{ V}$  and  $V_{DDP} = 3.3 \text{ V}$ .

Table 47 DC Characteristics of the Receive MII Interface

Parameter	Symbol	Symbol Values			Unit	Note /
		Min.	Тур.	Max.		Test Condition
Output high voltage (R)GMII mode	V <sub>OH</sub>	2.1	-	_	V	I <sub>OH</sub> = -1 mA, V <sub>DDP</sub> = 2.37 V
Output high voltage MII mode	V <sub>OH</sub>	2.4	_	_	V	I <sub>OH</sub> = -4 mA, V <sub>DDP</sub> = 3.13 V
Output low voltage	V <sub>OL</sub>	_	_	0.4	V	I <sub>OL</sub> = 4 mA

### 6.5.1.3 MII Transmit Interface

This section defines the DC characteristics of the MII transmit interface. Depending on the MII mode, this interface comprises the set of pins TX\_CLK, TXD[3:0], TX\_CTL. The DC characteristics summarized in **Table 48** are valid for  $V_{DDP} = 2.5 \text{ V}$  and  $V_{DDP} = 3.3 \text{ V}$ . Note that these pins are multiplexed with a SerDes interface, for example SGMII or 1000BASE-X, depending on the operational mode of the GPY111. This chapter specifies the DC characteristics for the case that these pins operate in one of the non-SerDes modes.

Table 48 DC Characteristics of the Transmit MII Interface

Parameter	Symbol	Values	Unit	Note /
		Min. Typ, Max.		Test Condition
Input high voltage	V <sub>IH</sub>	1.70	V	_
Input low voltage	V <sub>IL</sub>	- 1/2 70	).9 V	_

#### 6.5.1.4 LED Interface

This section defines the DC characteristics of the LED interface, summarized in **Table 49**. Note that these characteristics only apply in LED-driving mode. During device startup, when the LED pins are serving the soft pin-strapping function, these characteristics do not necessarily apply.

Table 49 DC Characteristics of the Transmit LED Interface

Parameter	Symbol		Values		Unit	Note / Test Condition
		Min.	Тур.	Max.		
Output high voltage	V <sub>OH</sub>	1.9	_	_	V	V <sub>DDH</sub> = 2.5 V, I <sub>OH</sub> = -15 mA
Output high voltage	V <sub>OH</sub>	2.7	_	_	V	V <sub>DDH</sub> = 3.3 V, I <sub>OH</sub> = -15 mA
Output low voltage	V <sub>OL</sub>	_	_	0.4	V	I <sub>OL</sub> = 15 mA



#### 6.5.1.5 JTAG Interface

The JTAG Interface comprises the set of pins TCK, TDI, TDO and TMS. It operates in the VDDH power domain. The DC characteristics for  $V_{DDH} = 2.5 \text{ V}$  and  $V_{DDH} = 3.3 \text{ V}$  are summarized in **Table 50** and **Table 51**, respectively.

Table 50 DC Characteristics of the JTAG Interface (VDDH = 2.5 V)

Parameter	Symbol		Values	Unit	Note /	
		Min.	Тур.	Max.		Test Condition
Input high voltage	V <sub>IH</sub>	1.8	_	V <sub>DDH</sub> +0.3	V	_
Input low voltage	V <sub>IL</sub>	_	_	0.7	V	_
Output high voltage	V <sub>OH</sub>	2.1	_	_	V	I <sub>OH</sub> = -4 mA
Output low voltage	V <sub>OL</sub>	_	_	0.4	V	I <sub>OL</sub> = 4 mA

Table 51 DC Characteristics of the JTAG Interface (VDDH = 3.3 V)

Parameter	0 0	Symbol		Values	Unit	Note /	
	1/0	Cx	Min.	Тур.	Max.		Test Condition
Input high voltage	97	V <sub>IH</sub>	2.3	_	V <sub>DDH</sub> +0.3	V	_
Input low voltage	*	ViL	_	_	0.7	V	_
Output high voltage		V <sub>OH</sub>	2.7	<u> </u>	_	V	I <sub>OH</sub> = -4 mA
Output low voltage		V <sub>OL</sub>	40.	_	0.4	V	I <sub>OL</sub> = 4 mA

#### 6.5.2 Twisted-Pair Interface

The TPI conforms to the 10BASE-T, 100BASE-TX and 1000BASE-T specifications described in IEEE802.3 [1], as well as ANSI X3.263-1995 [4].

#### 6.5.3 SGMII Interface

Since the SGMII interface implementation on the GPY111 is purely AC coupled, there are no DC characteristics to be specified. Instead, **Chapter 6.9.6** specifies the AC-coupling external circuitry with an option to generate the common-mode offset voltage required for DC-coupled operation (compliant with [13]) with the SGMII link partner. The AC characteristics which apply in SGMII mode are specified in **Chapter 6.6.8**.

#### 6.5.4 1000BASE-X Interface

Since the 1000BASE-X interface implementation on the GPY111 is purely AC coupled, there are no DC characteristics to be specified. Instead, **Chapter 6.9.7** specifies the AC-coupling external circuitry. The AC characteristics which apply in 1000BASE-X mode are specified in **Chapter 6.6.9**.



#### 6.6 AC Characteristics

The following sections describe the AC characteristics of the external interfaces.

#### 6.6.1 Reset

The GPY111 supports an asynchronous hardware reset, RSTN. The timing requirements of the GPY111 related to the RSTN pin are listed in **Table 52**. The timing requirements refer to the signal sequence waveforms shown in **Figure 38**<sup>1</sup>).

After the power supply settling time, all primary input signals to the GPY111 must be defined. In particular, the device reset RSTN must be held for a time  $t_{reset}$ . As shown in **Figure 38**, the reference clock (either generated internally using an attached crystal, or applied externally from an external crystal oscillator) should be available at the latest before the reset is released. This setup time is denoted as  $t_{ref}$ . The maximum slope of the rising edge of the reset signal is constrained by the rise time  $t_r$ . In case the integrated DC/DC switching regulator is used to self-supply the low-voltage domains, the reference clock must not be interrupted at all, unless when powering down the system.

The GPY111 only starts booting its integrated device controller after the clock is running and the reset signal has been released. After locking the PLL to the reference clock, the device does soft pin-strapping as well as an EEPROM scan (only if an EEPROM is connected). Since the default values inside the MDIO address space are modified by both procedures, the first MDIO access is only allowed after a time t<sub>MDIO</sub>.

Once the device is powered up, the clock output is continuously driven, irrespective of the status of the reset pin.

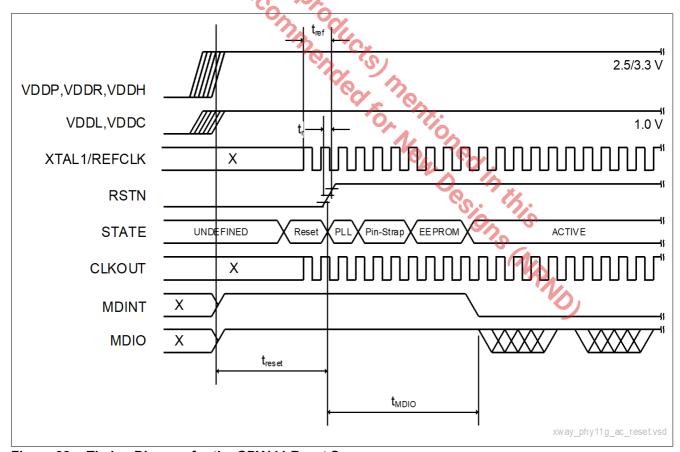


Figure 38 Timing Diagram for the GPY111 Reset Sequence

<sup>1)</sup> Figure 38 shows an active-low MDINT signal. However, MDINT can be configured to either active-low or active-high, depending on the external configuration. Refer to Chapter 3.4.3.3 - MDIO Interrupt for more information.



Table 52 AC Characteristics of the RSTN Pin

Parameter	Symbol		Values		Unit	Note / Test	Note / Test Condition		
		Min.	Тур.	Max.					
Reset time	t <sub>reset</sub>	200.0	-	_	ms	Flow Copper Converter	Mode SGMII/SGMII_NC CONV_X2T1000/ CONV_X2T1000A		
0/2		1.0	_	_	ms	Copper	RGMII/RMII		
Rise time	t <sub>R</sub>	_	_	10.0	ns	_	•		
First MDIO access after reset release	t <sub>MDIO</sub>	300.0	_	_	ms	_			

Note: For proper operation, the reset should be activated for a duration of t<sub>reset</sub>, after the power supply has settled to the correct value. Further, the signals at the CLK1 and CLK2 pads should also have stabilized.

# 6.6.2 Power Supply

Table 53 lists the AC characteristics of the power supplies.

Table 53 AC Characteristics of the Power Supply

Parameter	Symbol	Values				Note /
		Min.	Тур.	Max.		Test Condition
Power supply ripple on VDDL	R <sub>VDDL</sub>	20/	70	50.0	mV	Peak-peak value
Power supply ripple on VDDC	R <sub>VDDC</sub>	- (		50.0	mV	Peak-peak value
Power supply ripple on VDDP	R <sub>VDDP</sub>	_	1/2	100.0	mV	Peak-peak value
Power supply ripple on VDDH	R <sub>VDDH</sub>	_	24	100.0	mV	Peak-peak value
Power supply ripple on VDDR	R <sub>VDDR</sub>	_	- (	100.0	mV	Peak-peak value

Attention: It is to be noted that the operating range specified in Table 44 must still be respected, when above power supply ripple voltages are considered.

# 6.6.3 Input Clock

**Table 54** lists the input clock requirements for the case when no crystal is used, that is, when an external reference clock is applied at the XTAL1 pin of the GPY111. The table includes nominal frequency, frequency deviation, duty cycle and signal characteristics. If a crystal is used with the integrated oscillator to generate the reference clock, the clock requirements stated here are implicitly met as long as the specification for the crystal outlined in **Chapter 6.9.1** is satisfied.

Table 54 AC Characteristics of Input Clock on XTAL1 Pin

Parameter	Symbol		Values	Unit	Note /	
		Min.	Тур.	Max.		Test Condition
Frequency with 25 MHz input <sup>1)</sup>	f <sub>clk25</sub>	_	25.0	_	MHz	_
Frequency with 125 MHz input <sup>1)</sup>	f <sub>clk125</sub>	_	125.0	_	MHz	_
Frequency deviation		-50.0	_	+50.0	ppm	_



Table 54 AC Characteristics of Input Clock on XTAL1 Pin (cont'd)

Parameter	Symbol		Values	Unit	Note /	
		Min.	Тур.	Max.		Test Condition
Duty cycle		40.0	50.0	60.0	%	_
Rise/fall times		_	_	1.0	ns	_

<sup>1)</sup> More details on how to select the output frequency are given in Chapter 3.4.1.

# 6.6.4 Output Clock

**Table 55** lists the output clock requirements for the CLKOUT pin on the GPY111, including nominal frequency, frequency deviation, duty cycle and signal characteristics.

Table 55 AC Characteristics of Output Clock on CLKOUT Pin

Parameter	DA	Symbol		Values	Unit	Note /	
	0		Min.	Тур.	Max.		Test Condition
Frequency at 25 MHz	11	f <sub>clk25</sub>	_	25.0	_	MHz	_
Frequency deviation	Ox	6	-50.0	_	+50.0	ppm	_
Duty cycle			49.0	50.0	51.0	%	_
Rise/fall-times		CO. 10	<b>^</b> -	_	1.0	ns	_

### 6.6.5 MDIO Interface

**Figure 39** shows a timing diagram of the MDIO interface for a clock cycle in the read, write and turn-around modes. The timing measurements are annotated, and their absolute values defined in **Table 56**.

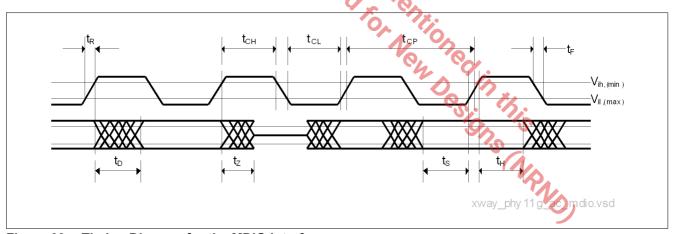


Figure 39 Timing Diagram for the MDIO Interface



Table 56 AC Characteristics of the MDIO Interface

Parameter	meter Symbol Values				Unit	Note / Test Condition
		Min.	Тур.	Max.		
MDC high time	t <sub>CH</sub>	10.0	_	_	ns	Given timings are all
MDC low time	t <sub>CL</sub>	10.0	_	_	ns	subject to the MDC at
MDC clock period	t <sub>CP</sub>	40.0	_	_	ns	the pin of the GPY111.
MDC clock frequency	t <sub>CP</sub>	_	_	25.0	MHz	_
MDC rise time	t <sub>R</sub>	_	_	5.0	ns	
MDC fall time	t <sub>F</sub>	_	_	5.0	ns	
MDIO read delay	t <sub>D</sub>	0.0	_	10.0	ns	
MDIO high-Ohmic (Z) delay	t <sub>Z</sub>	0.0	_	10.0	ns	
MDIO setup time	t <sub>s</sub>	4.0	_	_	ns	
MDIO hold time	t <sub>H</sub>	4.0	_	_	ns	

### 6.6.6 RMII Interface

This section describes the AC characteristics of the RMII interface on the GPY111. This interface conforms to the RMII specification as defined by the RMII Consortium in [11].

**Figure 40** shows the timing diagram of the transmit MII interface on the GPY111. It is referred to by **Table 57**, which specifies the timing requirements at 10 Mbit/s and 100 Mbit/s, respectively. Note that the figures provided in the table apply as setup and hold timings for all inputs (TXD[1:0], TX\_EN) and as output delay to all outputs (RXD[1:0], CRS\_DV and RX\_ER) of this interface.

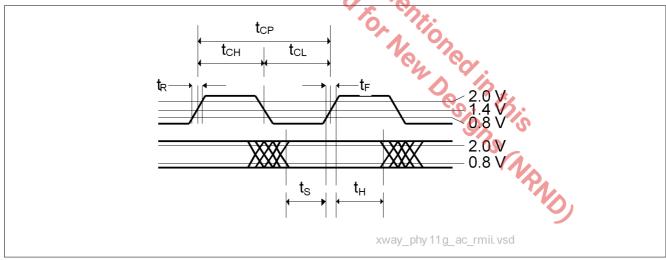


Figure 40 Transmit/Receive Timing Diagram of the RMII



Table 57 Timing Characteristics of the RMII at 10/100 Mbit/s

Reference clock period  Reference clock frequency  Reference clock high time  Reference clock low time  Reference clock duty cycle  Rise time (clock and data)  Fall time (clock and data)  ↑ REFCLK  Hold time/output delay subject to  REFCLK	1.00 1.00	Typ. 20.00 50.00 10.00 10.00 50.00	50.0 +50 ppm 13.00 13.00 65.00	MHz ns ns	±50 ppm ±50 ppm
Reference clock frequency $F_{REF}$ Reference clock high time $t_{CH}$ Reference clock low time $t_{CL}$ Reference clock duty cycle $D = t_{CH}/t_{CI}$ Rise time (clock and data) $t_{R}$ Fall time (clock and data) $t_{F}$	50.00 - 50 ppm 7.00 7.00 35.00 1.00	50.00 10.00 10.00 50.00	50.0 +50 ppm 13.00 13.00 65.00	MHz ns ns	±50 ppm
Reference clock high time $t_{CH}$ Reference clock low time $t_{CL}$ Reference clock duty cycle $D = t_{CH}/t_{CI}$ Rise time (clock and data) $t_{R}$ Fall time (clock and data) $t_{F}$	50 ppm 7.00 7.00 35.00 1.00	10.00 10.00 50.00	+50 ppm 13.00 13.00 65.00	ns ns	
Reference clock low time $t_{CL}$ Reference clock duty cycle $D = t_{CH}/t_{CI}$ Rise time (clock and data) $t_{R}$ Fall time (clock and data) $t_{F}$	7.00 7.00 35.00 1.00	10.00 50.00	13.00 13.00 65.00	ns ns	_
Reference clock low time $t_{CL}$ Reference clock duty cycle $D = t_{CH}/t_{CI}$ Rise time (clock and data) $t_{R}$ Fall time (clock and data) $t_{F}$	7.00 L 35.00 1.00	10.00 50.00	13.00 65.00	ns	_
Reference clock duty cycle $D = t_{CH}/t_{CI}$ Rise time (clock and data) $t_{R}$ Fall time (clock and data) $t_{F}$	1.00 1.00	50.00	65.00		
Rise time (clock and data) $t_R$ Fall time (clock and data) $t_F$	1.00 1.00			٠,	_
Fall time (clock and data) t <sub>F</sub>	1.00	_		%	_
			5.00	ns	_
Setup time/output delay subject to  ↑ REFCLK  Hold time/output delay subject to  ↑ REFCLK	4.00	_	5.00	ns	_
Hold time/output delay subject to 1 t <sub>H</sub>		_	_	ns	_
Peco	2.00	_	_	ns	_
		To Nen	tioned hosion	in this	



#### 6.6.7 RGMII Interface

This section describes the AC characteristics of the RGMII interface on the GPY111. Unless no HSTL voltages are supported, this interface conforms to the RGMII specification v1.3 and v2.0, as defined in [9] and [10] respectively. The RGMII interface can operate at speeds of 10 Mbit/s, 100 Mbit/s and 1000 Mbit/s.

# 6.6.7.1 Transmit Timing Characteristics

Figure 41 shows the timing diagram of the transmit RGMII interface on the GPY111. It is referred to by Table 58, which specifies the timing requirements. Note the data and control signals are clocked in using the internal delayed version of the TX\_CLK which is the external clock delayed by the integrated delay. The delay is adjustable in steps of 0.5 ns via MDIO. If the integrated delay is not used, for example because it is implemented externally by PCB wire delays, it must be set to zero, in which case all the timings are related directly to the TX\_CLK on the pin.

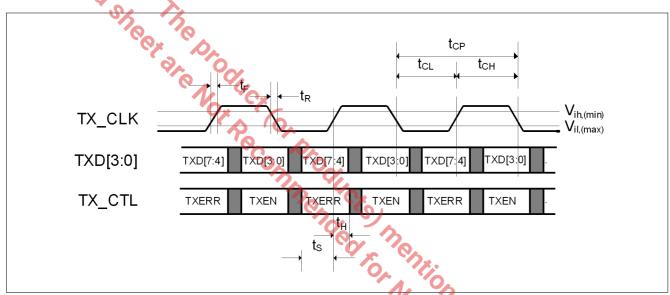


Figure 41 Transmit Timing Diagram of the RGMII

Table 58 Transmit Timing Characteristics of the RGMII

Parameter	arameter Symbol Values				Unit	Note / Test Condition
		Min.	Тур.	Max.	, o	
Transmit clock frequency (TX_CLK)	f <sub>TX_CLK</sub>	-50 ppm	125.0	+ 50 ppm	MHz	For 1000 Mbit/s speed
			25.0		MHz	For 100 Mbit/s speed
			2.5		MHz	For 10 Mbit/s speed
Transmit clock period (TX_CLK)	t <sub>CP</sub>	7.2	8.0	8.8	ns	For 1000 Mbit/s speed
		36.0	40.0	44.0	ns	For 100 Mbit/s speed
		360.0	400.0	440.0	ns	For 10 Mbit/s speed
Duty cycle	$t_{\rm CH}/t_{\rm CP,}$ $t_{\rm CL}/t_{\rm CP}$	45.0	50.0	55.0	%	Speed-independent
Transmit clock rise time (TX_CLK)	t <sub>R</sub>	_	_	750.0	ps	20%→80%
Transmit clock fall time (TX_CLK)	t <sub>F</sub>	_	_	750.0	ps	80%→20%
Setup time to ↑↓ TX_CLK	t <sub>s</sub>	1.0	_	_	ns	



Table 58 Transmit Timing Characteristics of the RGMII (cont'd)

Parameter	Symbol		Values			Note / Test Condition
		Min.	Тур.	Max.		
Hold time to ↑↓ TX_CLK	t <sub>H</sub>	1.0	_	_	ns	_
Integrated transmit clock delay	t <sub>ID</sub>	0.0	k*0.5	3.5	ns	Adjustable via MDIO register

# 6.6.7.2 Receive Timing Characteristics

**Figure 42** shows the timing diagram of the receive RGMII interface on the GPY111. It is referred to by **Table 59**, which specifies the timing requirements. The external clock on the pin is delayed by the integrated delay, which is adjustable in steps of 0.5 ns via MDIO. If the integrated delay is not used, for example because it is implemented externally by PCB wire delays, it must be set to zero, in which case all the timings are related directly to the RX\_CLK on the pin.

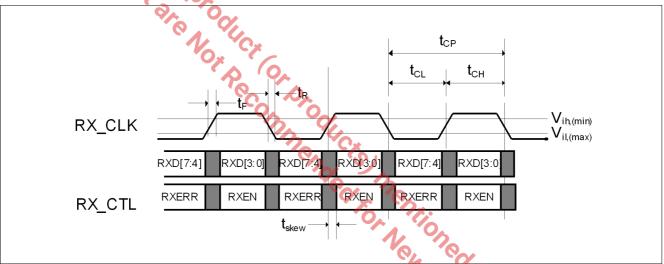


Figure 42 Receive Timing Diagram of the RGMII

Table 59 Receive Timing Characteristics of the RGMII

Parameter	Symbol		Values	9,	Unit	Note / Test Condition
		Min.	Тур.	Max.		
Receive clock frequency (RX_CLK)	f <sub>RX_CLK</sub>	-50 ppm	125.0	+ 50 ppm	MHz	For 1000 Mbit/s speed
			25.0		MHz	For 100 Mbit/s speed
			2.5		MHz	For 10 Mbit/s speed
Receive clock period (RX_CLK)	t <sub>CP</sub>	7.5	8.0	8.5	ns	For 1000 Mbit/s speed
		39.5	40.0	40.5	ns	For 100 Mbit/s speed
		399.5	400.0	400.5	ns	For 10 Mbit/s speed
Duty cycle	$t_{\rm CH}/t_{\rm CP,}$ $t_{\rm CL}/t_{\rm CP}$	45.0	50.0	55.0	%	Speed-independent
Receive clock rise time (TX_CLK)	t <sub>R</sub>	_	_	750.0	ps	20% → 80%
Receive clock fall time (TX_CLK)	t <sub>F</sub>	_	_	750.0	ps	80% → 20%



Table 59 Receive Timing Characteristics of the RGMII (cont'd)

Parameter	Symbol		Values		Unit	Note / Test Condition	
		Min.	Тур.	Max.			
Clock-to-data skew	t <sub>skew</sub>	-0.5	0.0	0.5	ns	The skew between the RXC and RXC/RX_CTL should be less than 500 ps	
Integrated receive clock delay	t <sub>ID</sub>	0.0	k*0.5	3.5	ns	Adjustable via MDIO register	



#### 6.6.8 SGMII Interface

This section describes the AC characteristics of the SGMII Interface on the GPY111. This interface conforms to the SGMII specification v1.7, as defined in [13]. The SGMII interface can operate at 1.25 Gbaud. The net data-rate is 1000 Mbit/s. Using repetition modes, 10 Mbit/s and 100 Mbit/s are supported.

Also note that Chapter 6.9.6 specifies the external circuitry.

# 6.6.8.1 Transmit Timing Characteristics

Figure 43 shows the timing diagram of the transmit SGMII interface at the GPY111. It is referred to by **Table 60**, which specifies the timing requirements.

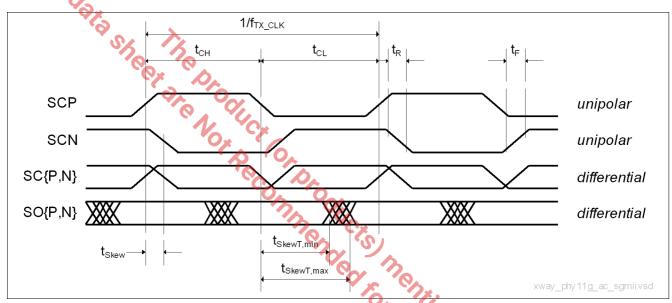


Figure 43 Transmit Timing Diagram of the SGMII

Table 60 Transmit Timing Characteristics of the SGMII

ИНZ —
6
os 20%→80%
os 80%→20%
os –
os Peak-peak <sup>1)</sup>
os –
nV Peak-peak amplitude
6 –
Σ –
Σ –
/o –
2

<sup>1)</sup> Assuming BER = 1e-12 and tracking BW = 1 MHz



# 6.6.8.2 Receive Timing Characteristics

**Figure 44** shows the timing diagram of the receive SGMII interface on the GPY111. It is referred to by **Table 61**, which specifies the timing requirements. Note that the integrated SGMII operates using a CDR (Clock and Data Recovery), and therefore does not require the 625 MHz differential receive clock. Consequently, there are no timing requirement related to this clock.

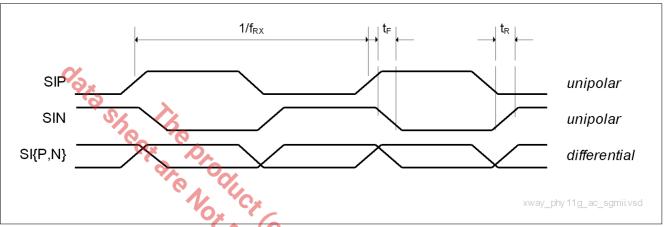


Figure 44 Receive Timing Diagram of the SGMII

Table 61 Receive Timing Characteristics of the SGMII

Parameter	Symbol	240	Values		Unit	Note /
		Min.	<b>у Т</b> ур.	Max.		Test Condition
Receive data rate	f <sub>RX</sub>	-50 ppm	1250.0	+ 50 ppm	Mbit/s	_
Receive data jitter tolerance	J <sub>RX</sub>	_ 9	x - 0/	500	ps	_
Receive signal rise time	t <sub>R</sub>	_	0/=	300	ps	20%→80%
Receive signal fall time	t <sub>F</sub>	_	-10	300	ps	80%→20%
Input differential voltage	V <sub>ID</sub>	50	_	500	mV	Peak-amplitude
Input impedance (single-ended)	R <sub>I</sub>	40	_	60	Ω	_
Input impedance (differential)	R <sub>I</sub>	80	_	120	Ω	_
					35	
						PNO,



### 6.6.9 1000BASE-X Interface

This section describes the AC characteristics of the 1000BASE-X interface on the GPY111. This interface conforms to the specifications given in IEEE802.3, clause 36 (see [1]). The 1000BASE-X interface can operate at 1.25 Gbaud. The net data-rate is 1000 Mbit/s.

Also note that **Chapter 6.9.7** describes the external circuitry.

# 6.6.9.1 Transmit Timing Characteristics

**Figure 45** shows the timing diagram of the transmit 1000BASE-X interface on the GPY111. It is referred to by **Table 62**, which specifies the timing requirements.

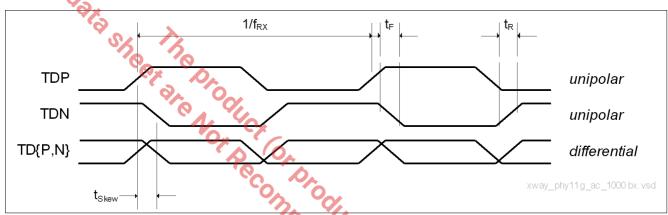


Figure 45 Transmit Timing Diagram of the 1000BASE-X Interface

Table 62 Transmit Timing Characteristics of the 1000BASE-X Interface

Parameter	Symbol	9	Values	Unit	Note /	
		Min.	Тур.	Max.		Test Condition
Transmit data rate	f <sub>RX</sub>	-50 ppm	1250.0	+ 50 ppm	Mbit/s	_
Transmit rise time	t <sub>R</sub>	100	- 4	200	ps	20%→80%
Transmit fall time	t <sub>F</sub>	100	_	200	ps	80%→20%
Output data jitter	J <sub>TX</sub>	_	_	240	ps	Peak-peak <sup>1)</sup>
Time skew between pairs	t <sub>Skew</sub>	_	_	20	ps	_
Output differential voltage	V <sub>OD</sub>	150	250	500	mV	Peak-peak amplitude
Output voltage ringing	$V_{ring}$	_	_	10	%	(ی
Output impedance (single-ended)	R <sub>o</sub>	40	_	60	Ω	_
Output impedance (differential)	R <sub>o</sub>	80	_	120	Ω	_
Delta output impedance	dR <sub>o</sub>	_	_	10	%	_

<sup>1)</sup> Assuming BER = 1e-12 and tracking BW = 1 MHz



# 6.6.9.2 Receive Timing Characteristics

**Figure 46** shows the timing diagram of the receive 1000BASE-X interface on the GPY111. It is referred to by **Table 63**, which specifies the timing requirements.

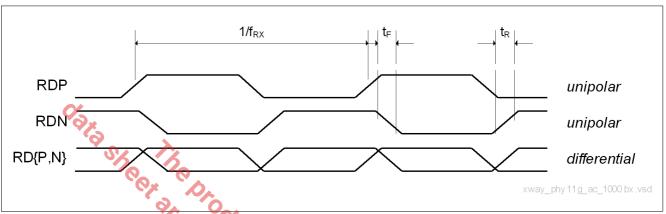


Figure 46 Receive Timing Diagram of the 1000BASE-X

Table 63 Receive Timing Characteristics of the 1000BASE-X

Parameter	Symbol	Symbol Values				Note /
	OA	Min.	Тур.	Max.		Test Condition
Receive data rate	f <sub>RX</sub>	-50 ppm	1250.0	+ 50 ppm	Mbit/s	_
Receive data jitter tolerance	$J_{RX}$	0-	<b>Ö</b> Г	500	ps	_
Receive signal rise time	t <sub>R</sub>	10/0	カカ	300	ps	20%→80%
Receive signal fall time	t <sub>F</sub>	- 0	x-0	300	ps	80%→20%
Input differential voltage	V <sub>ID</sub>	50	0-	500	mV	Peak-amplitude
Input impedance (single-ended)	R <sub>I</sub>	40	-1/5	60	Ω	_
Input impedance (differential)	R <sub>I</sub>	80	_ 0	120	Ω	_

### 6.6.10 Twisted-Pair Interface

The AC characteristics for the TPI on pins VxpA, VxnA, VxpB, VxnB, VxpC, VxpC, VxpD and VxnD are specified in [1] and [4]. Since the GPY111 conforms to these standards, the values and limits specified there apply to this specification as well.



#### 6.7 **Power Consumption**

Table 64 specifies the typical power consumption of the GPY111 (PEF7071VV16) under various operating modes and line lengths (with each power domain's current consumption listed individually). The 1.0 V is assumed to be generated with an external DCDC converter. The length of the Ethernet cable is 3 m, unless otherwise mentioned.

Table 64 Power Consumption with VDDH and VDDP Set to 2.5 V, VDDC and VDDL Set to 1.0 V

	VDDP 2.5 V (mA)	VDDL 1.0 V (mA)	VDDC 1.0 V (mA)	VDDH 2.5 V (mA)	Power (mW)
Reset 📞	2.0	2.0	10.0	8.0	40.0
Power Down	2.0	4.0	20.0	8.0	50.0
No link	2.0	21.0	40.0	13.0	99.0
10 Mbps (Idle)	2.0	16.0	42.0	16.0	104.0
10 Mbps (Run)	2.0	16.0	43.0	20.0	114.0
100 Mbps (Idle)	3.0	22.0	51.0	31.0	158.0
100 Mbps (Idle, EEE)	3.0	22.0	45.0	20.0	124.0
100 Mbps (Run)	4.0	22.0	51.0	31.0	160.0
1000 Mbps (Idle)	9.0	72.0	150.0	60.0	396.0
1000 Mbps (Idle, EEE)	9.0	70.0	80.0	26.0	238.0
1000 Mbps (Run)	10.0	72.0	150.0	60.0	400.0
1000 Mbps (Run, 100m)	10.0	75.0	211.0	60.0	460.0
S.8 Isolation Requirem The GPY111 meets the isolation requirem 4] clause 8.4.	i <b>ents</b>	od in [4]Ode	Chy.		



# 6.9 External Circuitry

This chapter specifies the component characteristics of the external circuitry connected to the GPY111.

# 6.9.1 Crystal

In case no external reference clock (as described in **Chapter 6.6.3**) is available, the device must generate its own self-contained clock using an external crystal (parallel resonator) connected to XTAL1 and XTAL2. The internal crystal oscillator internally generates a reference clock which conforms to the specification defined in **Chapter 6.6.3**, as long as the component specification outlined in this section is satisfied. In order to specify the crystal, an equivalent circuit is shown in **Figure 47**. This circuit is referred to by the component characteristics specification given in **Table 65**.

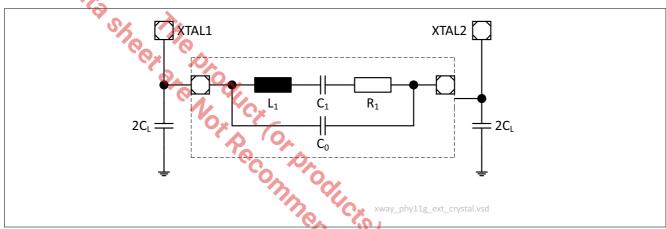


Figure 47 Equivalent Circuit for Crystal Specification

Table 65 Electrical Characteristics for Supported Crystals

				Unit	Note / Test Condition
	Min.	Typ	Max.		
: Res	_	25	0 1	MHz	_
	-50	0	+50	ppm	_
Τ	-40	_	+85	°C	<u>p</u>
C <sub>1</sub>	_	15	30	₽ _	_
R₁	_	30	70	Ω	<b>*</b>
$C_0$	_	_	7	pF	<b>1</b> / <sub>\lambda</sub>
2C <sub>L</sub>	_	33.0	_	pF	- "
o drive	0.1	_	_	mW	_
	Γ C <sub>1</sub> R <sub>1</sub> C <sub>0</sub> 2C <sub>L</sub>	-50 Γ -40 C <sub>1</sub> - R <sub>1</sub> - C <sub>0</sub> -	-50 0  -50 0  -50 0  -40 -  -50 30  -70 15  -7	-50 0 +50  -50 0 +50  -50 0 +50  -40 - 185  -70 - 15 30  -70 - 70  -70 - 70  -70 - 70  -70 - 33.0 -	-50 0 +50 ppm  -40 - +85 °C  -40 - 15 30 fF  -7 - 30 70 Ω  -7 - 7 pF  -7 - 33.0 - pF

<sup>1)</sup> Refers to the sum of all effects, e.g. general tolerances, aging, temperature dependency



#### 6.9.2 LED

This section specifies the electrical characteristics of the LEDs which are supported. Note that the requirements specified here are given to guarantee proper operation of the pin-strapping (**Chapter 3.4.1**), which shares the LED pins. Nevertheless, the requirements are selected to fit almost every LED available on the target market.

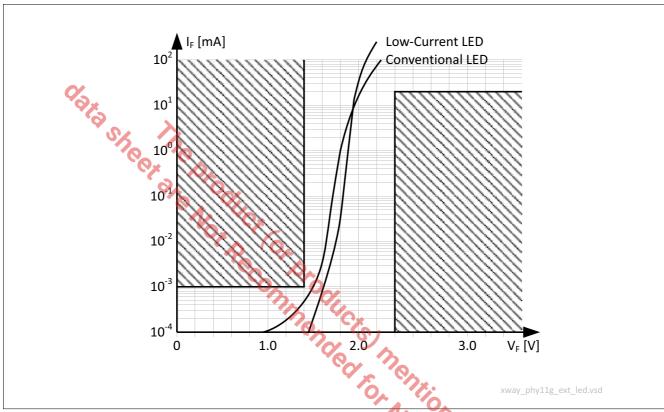


Figure 48 Tolerance Graph for the Forward Current Versus Voltage of the Supported LEDs

Note that LED devices also significantly contribute to the system power consumption. A conventional LED has an operating point of  $V_F \approx 2.0$  V and  $I_F \approx 20.0$  mA. This results in a power consumption of 40 mW per LED. Three LEDs would consume up to 120 mW, which is already as high as 30% of the maximum power consumption of the entire GPY111 device. Using low-current LEDs would improve this figure to 12 mW, that is, only 3% of the device power consumption. **Figure 48** shows a tolerance graph with typical U-I characteristics of the supported LED types. The tolerance values referred to by this figure are listed in **Table 66**.

Table 66 Electrical Characteristics for Supported LEDs

Parameter	Symbol Values				Unit	Note / Test Condition
		Min.	Тур.	Max.		
Temperature range	Т	-40.0	_	+85.0	°C	_
Forward current	I <sub>F</sub>	_	-	1.0	μΑ	V <sub>F</sub> ≤ 1.4 V
Forward current (low-current LEDs) <sup>1)</sup>	I <sub>F</sub>	_	2.0	_	mA	$1.4 \text{ V} \le \text{V}_{\text{F}} \le 2.5 \text{ V}$
Forward current (conventional LEDs)	I <sub>F</sub>	_	20.0	_	mA	$1.4 \text{ V} \le \text{V}_{\text{F}} \le 2.5 \text{ V}$
Forward voltage (nominal)	V <sub>F</sub>	1.6	1.9	2.2	V	Nominal forward voltage, where LED is emitting light


<sup>1)</sup> Low-current LEDs are preferred in order to reduce the system power consumption.



#### 6.9.3 **Transformer (Magnetics)**

This section specifies the electrical characteristics of the transformer<sup>1)</sup> devices that are supported. The specifications listed here guarantee proper operation according to IEEE 802.3 [1]. A typical Gigabit Ethernet capable transformer device is depicted in Figure 49. Table 67 lists the characteristics of the supported transformer devices. Note that these characteristics represent the bare minimum for achieving standard performance. Since the transformer significantly impacts the link performance, it is possible to increase the loop reach by selecting transformers with improved parameters.

Note that the IC-side center taps of the transformer must not be connected and should be left open. In particular, transformer types which short all IC-side center taps together must not be used.

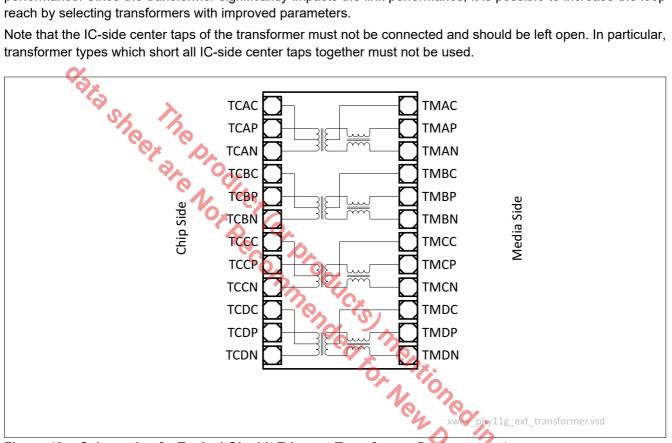

Schematic of a Typical Gigabit Ethernet Transformer Device Figure 49

Table 67 **Electrical Characteristics for Supported Transformers (Magnetics)** 

Parameter	Symbol	Val	ues	Unit Note / Test Condition		
		Min.	Тур.	Max.		PA
Turns ratio	1:tr	0.95	1.00	1.05		±5%
Differential-to-common-	DCMR	43	_	_	dB	30 MHz
mode rejection		37	_	_	dB	60 MHz
		33	_	_	dB	100 MHz
Crosstalk attenuation	СТА	45	_	_	dB	30 MHz
		40	_	_	dB	60 MHz
		35	_	_	dB	100 MHz
Insertion loss	IL	-	_	1	dB	0.1 MHz ≤ f ≤ 100 MHz

<sup>1)</sup> Also often referred to as "magnetics".



Table 67 Electrical Characteristics for Supported Transformers (Magnetics) (cont'd)

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Тур.	Max.		
Return loss	RL	18.0	-	_	dB	1 MHz ≤ f ≤ 30 MHz
		14.0	_	_	dB	31 MHz ≤ f ≤ 40 MHz
		13.0	_	_	dB	41 MHz ≤ f ≤ 50 MHz
		12.0	_	_	dB	51 MHz ≤ f ≤ 80 MHz
		10.0	-	_	dB	81 MHz ≤ f ≤ 100 MHz

# 6.9.4 **RJ45** Plug

Table 68 describes the electrical characteristics of the RJ45 plug to be used in conjunction with the GPY111.

Table 68 Electrical Characteristics for Supported RJ45 Plugs

Symbol	Va	lues		Unit	Note / Test Condition
1/2	Min.	Тур.	Max.		
СТА	45	_	_	dB	30 MHz
7	40	_	_	dB	60 MHz
	35	_	_	dB	100 MHz
IL	17/2 9/1-	_	1	dB	1 MHz ≤ f ≤ 100 MHz
RL	25.0	-	_	dB	1 MHz ≤ f ≤ 100 MHz
			001	Ö	
	Symbol CTA	Min.  CTA 45  40  35	Min. Typ.  CTA 45 -  40 -  35 -	Min. Typ. Max.  CTA 45  40  35	Min. Typ. Max.  CTA 45 dB  40 dB  35 dB  IL 1 dB



# 6.9.5 Twisted-Pair Common-Mode Rejection and Termination Circuitry

This section describes the external circuitry which is required to properly terminate the common mode of the Twisted-Pair Interface (TPI). Also, these external components are required to perform proper rejection of alien disturbers which are injected into the common mode of the TPI. **Figure 50** shows a typical external circuit, and in particular the common-mode components. **Table 69** defines the component values and their supported tolerances.

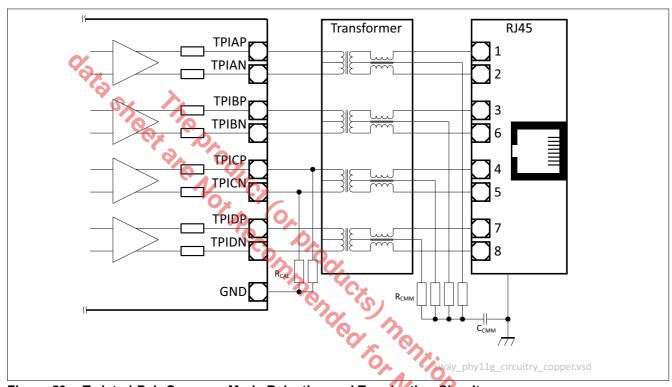


Figure 50 Twisted-Pair Common-Mode Rejection and Termination Circuitry

Table 69 Electrical Characteristics for supported Transformers (Magnetics)

Parameter	Symbol		Values	W.	Unit	Note / Test Condition
		Min.	Тур.	Max.		•
Common-mode de-coupling capacitance (media end)	C <sub>CMM</sub>	800	1000	1200	pF	±20%, 2 kV
Common-mode termination resistance (media end)	R <sub>CMM</sub>	80	75	70	Ω	±10%
Calibration resistor	R <sub>CAL</sub>	15840	16000	16160	Ω	±1%



#### 6.9.6 SGMII Interface

**Figure 51** shows the external analog circuitry that may be used to properly set up an SGMII MAC-to-PHY connection. All optional circuitry is considered. Since the GPY111 fully implements CDR (Clock and Data Recovery) functionality, it is not required to connect the MAC source clock. However, it may be required to wire the PHY source clock, in case the MAC does not implement CDR. If the MAC supports CDR, the elements shaded in dark gray in the figure may be omitted. The GPY111 does not directly generate the defined common-mode offset voltage of 1.2 V, since this is not required for an AC-coupled interface. If a MAC requires this offset voltage for proper DC-coupled operation, this offset can be injected using the resistive dividers (R<sub>1</sub> and R<sub>2</sub>) marked by the regions shaded in light gray in the figure. If the MAC is purely AC-coupled, these components can be omitted. Also the MAC may have properly terminated inputs, and therefore the termination resistors R<sub>3</sub> are not necessary. Component values for this type of circuit are defined in **Table 70**. The simplest circuitry is used when the GPY111 is connected to a MAC with CDR and AC-coupled, well-terminated differential pins. This configuration is shown in **Figure 52**.

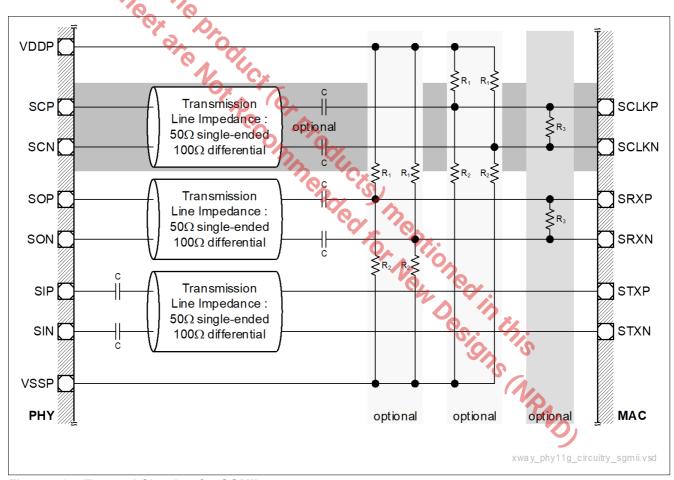


Figure 51 External Circuitry for SGMII

Table 70 Electrical Characteristics for the SGMII External Components

Parameter	Symbol		Values	Unit	Note / Test Condition	
		Min.	Тур.	Max.		
BIAS resistance 1	R <sub>1</sub>	-10%	1k	+10%	Ω	VDDP = 3.3 V
		-10%	1k	+10%	Ω	VDDP = 2.5 V



Table 70 Electrical Characteristics for the SGMII External Components (cont'd)

Parameter	Symbol		Values	Unit	Note / Test Condition	
		Min.	Тур.	Max.		
BIAS resistance 2	R <sub>2</sub>	-10%	1.7k	+10%	Ω	VDDP = 3.3 V
		-10%	1.1k	+10%	Ω	VDDP = 2.5 V
Termination resistance	$R_3$	-10%	100	+10%	Ω	
Coupling capacitance	С	-10%	100	+10%	nF	

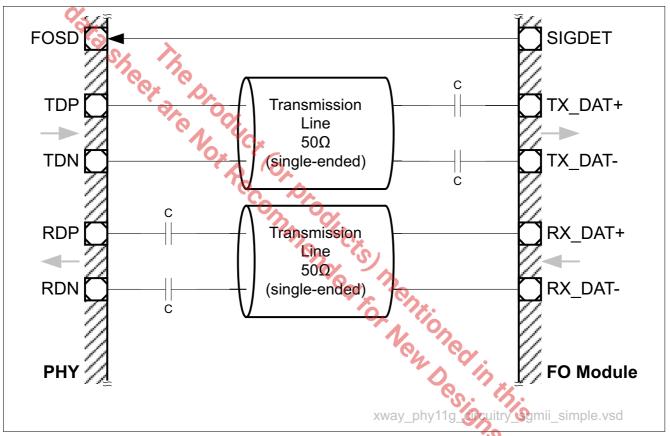


Figure 52 Simplified External Circuitry for SGMII



### 6.9.7 1000BASE-X Interface

**Figure 53** depicts the external analog circuitry that may be used to properly set up a 1000BASE-X PHY-to-FO connection. There are FO modules available that already integrate all coupling circuitry components, in which case a straight connection is sufficient and the external coupling caps may be omitted. Component values for this type of circuit are defined in **Table 71**. Many FO modules have open-drain outputs, which can cause conflict with the weak pull-down nature of the SIGDET pin. In such cases, a pull-up resistor R<sub>pu</sub> should be included to weakly pull the SIGDET signal to V<sub>DDP</sub> in a high-impedance situation. This is shown in **Figure 53** by the area shaded in gray.

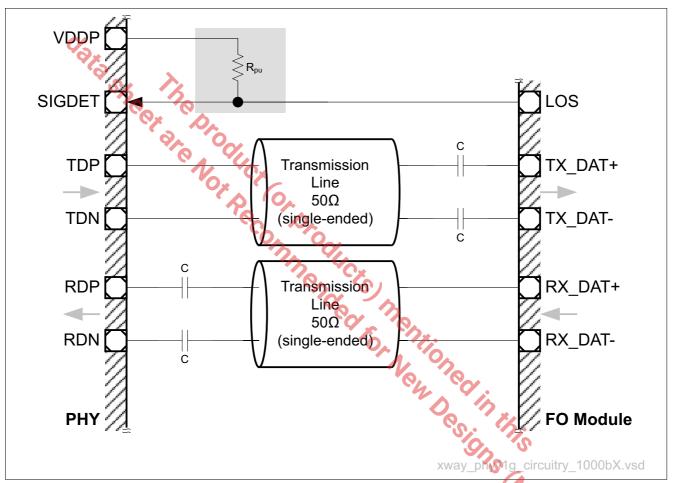


Figure 53 External Circuitry for a 1000BASE-X Interface

Table 71 Electrical Characteristics for the 1000BASE-X External Components

Parameter	Symbol	Values				Note / Test Condition
		Min.	Тур.	Max.		
Coupling capacitance	С	90	100	110	nF	±10%
Pull-up resistance	R <sub>pu</sub>	1	_	_	kΩ	±10%



# 6.10 JTAG Interface Timing

The timing requirement for JTAG interface is shown in **Table 72** and the timing diagram illustrated in **Figure 54**. The JTAG reset signal TRST is not listed since it is internally generated by the DCDC converter.

Table 72 JTAG Interface Timing

Parameter	Symbol	Values			Unit	Note /
		Min. Typ.		Max.		Test Condition
TCK clock period	$t_{TCK}$	100	_	_	ns	_
TCK clock duty cycle	t <sub>TCKr/f</sub> /t <sub>TCK</sub>	40	_	60	%	_
TCK clock rise time	$t_{TCKr}$	_	_	5	ns	_
TCK clock fall time	$t_{TCKf}$	_	_	5	ns	_
TMS setup time from TCK	$t_{TMSs}$	10	_	_	ns	_
TMS hold time from TCK	$t_{TMSh}$	15	_	_	ns	_
TDO delay time from TCK	$t_{TDOd}$	_	_	30	ns	_
TDI setup time from TCK	t <sub>TDIs</sub>	10	_	_	ns	_
TDI hold time from TCK	$t_{TDIh}$	15	_	_	ns	_

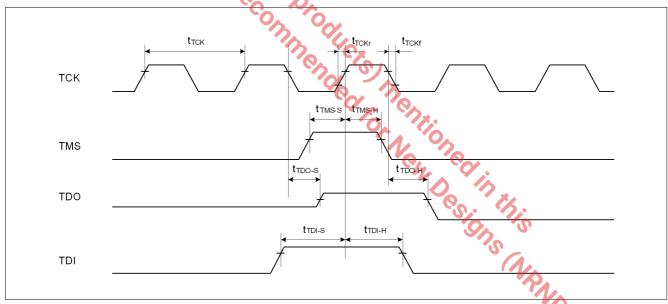


Figure 54 JTAG Timing Definition



**Package** 

# 7 Package

This section outlines all relevant packaging information.

# 7.1 Package Outline

The GPY111 device is available in a 48-pin Very Thin Quad Flat Non-leaded (VQFN) package with an exposed pad (EPAD). The pad pitch is 0.5 mm and the size of the EPAD is 5.2 x 5.2 mm. The EPAD is used as the common ground and must be connected to the PCB ground plane. The package is a lead-free "green package", and its exact name for purposes of reference is PG-VQFN-48.

Figure 55 contains the top, side and bottom dimension drawings of the PG-VQFN-48 package.

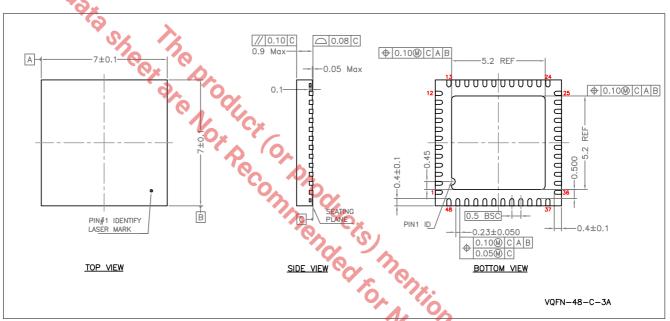


Figure 55 Package Outline Drawing of the PG-VQFN-48 Package


Package description, package handling, PCB and board assembly information is available on request.



**Package** 

#### 7.2 **Chip Identification and Ordering Information**

Figure 56 shows an example of the marking pattern on the device. The actual chip marking may differ slightly from the illustration.

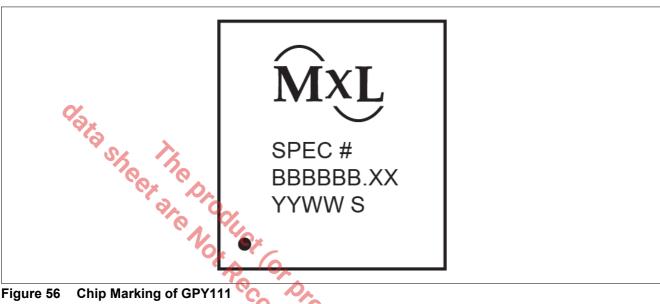

**Chip Marking of GPY111** Figure 56

Table 73 explains the chip marking information and Table 74 provides product and package naming.

Table 73 **Chip Marking Pattern** 

Marking	Description
Text Line 1	MaxLinear logo
Text Line 2	Spec. Number - see Table 74.
Text Line 3	Wafer Lot Number
Text Line 4	Date Code (YYWW) and Assembly Site Code (S)

Table 74 **Chip Ordering Information** 

Product Name	Ordering Code	MMID	S-SPEC#	Package
GPY111	PEF7071VV16	947046	SLLHU	PG-VQFN-48



**Package** 

# 7.3 Thermal Resistance

The thermal resistance values given below were determined in accordance with JEDEC specifications.

They are valid for an ambient temperature  $T_{\rm A}$  = 85°C and a maximum device power dissipation of 400 mW (see **Chapter 6.7**). Sustained operation of the device with the internal junction temperature above 125°C will reduce the lifetime of the device and/or cause device failure.

Table 75 Thermal Resistance of the PG-VQFN-48 Package

Parameter	Symbol		Values		Unit	Note / Test Condition
		Min.	Тур.	Max.		
lunction to ambient	R <sub>th, JA</sub>	_ _ _	42.2 65.5 129.8	_ _ _	K/W	2s2p + vias 2s2p 1s0p Free convection and radiation
lunction to top of package	WJT N	9/1/0"	8.8 9.1 10.0	_ _ _	K/W	2s2p + vias 2s2p 1s0p
lunction to case (bottom)	R <sub>th, JCbot</sub>	*	14.39	_	K/W	2s2p + vias Diepad bottom fixed to $T_{\rm A}$
lunction to case (top)	$R_{th, JCtop}$	- %	33.55	_	K/W	2s2p + vias Package top fixed to $T_{\rm A}$
				Tor 1	Philone wo	2s2p + vias Package top fixed to T <sub>A</sub>



References

### References

- [1] IEEE 802.3-2008: "Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications", IEEE Computer Society, December 2008
- IEEE 802.3az, Amendment 5: "Media Access Control Parameters, Physical Layers, and Management Parameters for Energy-Efficient Ethernet", September 2010
- [3] IEEE 802.3at, Amendment 3: "Data Terminal Equipment (DTE) Power via the Media Dependent Interface (MDI) Enhancements", October 2009
- [4] ANSI X3.263-1995: "Fiber Distributed Data Interface (FDDI) Token Ring Twisted Pair Physical Layer Medium Dependent (TP-PMD)", ANSI, 1995
- ANSI TIA/EIA-568-A:1995 [5]
- ISO/IEC 11801:1995 [6]
- [7] IEC 60950:1991 (General Safety)
- IEEE Std 1149.1-2001: "IEEE Standard Test Access Port and Boundary-Scan Architecture", IEEE/ANSI, 2001
- Hewlett Packard, "Reduced Gigabit Media Independent Interface (RGMII)", Version 1.3, 12.10.2000
- [10] Hewlett Packard, "Reduced Gigabit Media Independent Interface (RGMII)", Version 2.0, 04.01.2002
- [11] RMII Consortium, "RMII-Specification", Rev 1.2, 1997
- [12] SFF Committee, "SFF-8053 Specification for GBIC (Gigabit Interface Converter)", Rev 5.5, September 27, 2000
- [13] CISCO Systems, "Serial GMII Specification", July 2001, Rev. 1.7
- ation Note K [14] AMD, White Paper on "Magic Packet Technology", White Paper (c) 1998, Advance Micro Devices
- [15] Universal Gateway Software 6.1 Power Saving Method Application Note Rev. 1.0



**Terminology** 

# **Terminology**

**ADS** Auto-Downspeed **ANEG Auto-Negotiation** 

**ANSI** American National Standards Institute

В

**BER** Bit Error Rate BW Bandwidth

С

Category 5 Cabling CAT5

Configuration Content Record **CCR** ck and Da.
clic Redundancy of partial signature Recordance Sense

Digital Echo Canceler

Externally Controlled Mode (LED)
Energy-Efficient Ethernet
Electrically Erasable Programmable ROM
Electro-Magnetic Interference
Arro-Static Discharge **CDR** Clock and Data Recovery **CRC CSR** 

**CRS** 

D

DEC

Ε

**ECM** 

**EEE** 

**EEPROM** 

**EMI ESD** 

F

FO

G

GbE

**GBIC** 

**GMII** 

**GPIO** 

Н

**HBM Human Body Model** 

**HSTL** High-Speed Transceiver Logic

**HYB** Hybrid

I<sup>2</sup>C Internally Integrated Circuit Interface (also I2C)

IC Integrated Circuit

**ICM** Internally Controlled Mode (LED)

**IEEE** Institute of Electrical and Electronics Engineers



**Terminology** 

**IPG** Inter-Packet Gap

J

**JTAG** Joined Test Action Group

L

LAN Local Area Network **LED** Light Emitting Diode LPI Low Power Idle LSB Least Significant Bit

М

a A.

Jia-Depen.

Inagement Data
edia-Dependent Interface
MDIO Manageable Device
Multimedia over Coax Alliance
Most Significant Bit

Ark Attached Storage

Annection

Antifier MAC Media Access Controller MDI **MDIO** 

**MDIX** 

MII MMD MoCA

**MSB** 

Ν

NAS

NP

0

OSI OUI

Ρ

**PCB PCS** 

PD

PHY

**PICMG** 

**PLL** 

**PMA** PON Passive Optical Network **PSE** Power-Sourcing Equipment

R

**RGMII** Reduced (pin-count) Gigabit Media-Independent Interface

**RMII** Reduced (pin-count) Media-Independent Interface

RXReceive

S

SFP Small Form-Factor Pluggable

**SGMII** Serial Gigabit Media-Independent Interface



**Terminology** 

**SMD** Surface-Mounted Device

SoC System on Chip

T

TAP **Test Access Port** 

**TPG Test-Packet Generator** TPI Twisted-Pair Interface

 $\mathsf{TX}$ Transmit

V

**VQFN** Very Thin Quad Flat Non-leaded

W

Wireless Local Area Network Wi-Fi

Wake-on-LAN WoL

X

Symbolic shortening which denotes the set of supported MII Interfaces, e.g. RGMII and SGMII xMII